



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Input Rectifier Diode, 10 A

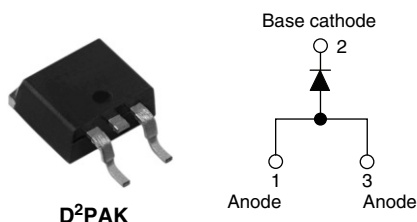

### DESCRIPTION/FEATURES

The 10ETS..S rectifier series has been optimized for very low forward voltage drop, with moderate leakage. The glass passivation technology used has reliable operation up to 150 °C junction temperature.

Typical applications are in input rectification and these products are designed to be used with Vishay HPP switches and output rectifiers which are available in identical package outlines.

This product series has been designed and qualified for industrial level.

### PRODUCT SUMMARY

$V_F$ at 10 A	< 1 V
$I_{FSM}$	200 A
$V_{RRM}$	800/1200 V

### OUTPUT CURRENT IN TYPICAL APPLICATIONS

APPLICATIONS	SINGLE-PHASE BRIDGE	THREE-PHASE BRIDGE	UNITS
Capacitive input filter $T_A = 55\text{ °C}$ , $T_J = 125\text{ °C}$ common heatsink of 1 °C/W	12.0	16.0	A

### MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{F(AV)}$	Sinusoidal waveform	10	A
$V_{RRM}$		800/1200	V
$I_{FSM}$		200	A
$V_F$	10 A, $T_J = 25\text{ °C}$	1.1	V
$T_J$		- 40 to 150	°C

### VOLTAGE RATINGS

PART NUMBER	$V_{RRM}$ : MAXIMUM PEAK REVERSE VOLTAGE V	$V_{RSM}$ : MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ AT 150 °C mA
10ETS08S	800	900	0.5
10ETS10S	1000	1100	
10ETS12S	1200	1300	

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum average forward current	$I_{F(AV)}$	$T_C = 105\text{ °C}$ , 180° conduction half sine wave	10	A
Maximum peak one cycle non-repetitive surge current	$I_{FSM}$	10 ms sine pulse, rated $V_{RRM}$ applied	170	
		10 ms sine pulse, no voltage reapplied	200	
Maximum $I^2t$ for fusing	$I^2t$	10 ms sine pulse, rated $V_{RRM}$ applied	130	A <sup>2</sup> s
		10 ms sine pulse, no voltage reapplied	145	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1$ to 10 ms, no voltage reapplied	1450	A <sup>2</sup> √s

# 10ETS..S High Voltage Series

Vishay High Power Products Input Rectifier Diode, 10 A



ELECTRICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum forward voltage drop	V <sub>FM</sub>	10 A, T <sub>J</sub> = 25 °C		1.1	V
Forward slope resistance	r <sub>t</sub>	T <sub>J</sub> = 150 °C		20	mΩ
Threshold voltage	V <sub>F(TO)</sub>			0.82	V
Maximum reverse leakage current	I <sub>RM</sub>	T <sub>J</sub> = 25 °C	V <sub>R</sub> = Rated V <sub>RRM</sub>	0.05	mA
		T <sub>J</sub> = 150 °C		0.50	

THERMAL - MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction and storage temperature range	T <sub>J</sub> , T <sub>Stg</sub>		- 40 to 150	°C
Maximum thermal resistance, junction to case	R <sub>thJC</sub>	DC operation	2.5	°C/W
Maximum thermal resistance, junction to ambient (PCB mount)	R <sub>thJA</sub> <sup>(1)</sup>		62	
Soldering temperature	T <sub>S</sub>		240	°C
Approximate weight			2	g
			0.07	oz.
Marking device		Case style D <sup>2</sup> PAK (SMD-220)	10ETS08S	
			10ETS10S	
			10ETS12S	

## Note

<sup>(1)</sup> When mounted on 1" square (650 mm<sup>2</sup>) PCB of FR-4 or G-10 material 4 oz. (140  $\mu\text{m}$ ) copper 40  $^{\circ}\text{C}/\text{W}$   
For recommended footprint and soldering techniques refer to application note #AN-994



# 10ETS..S High Voltage Series

Input Rectifier Diode, 10 A Vishay High Power Products

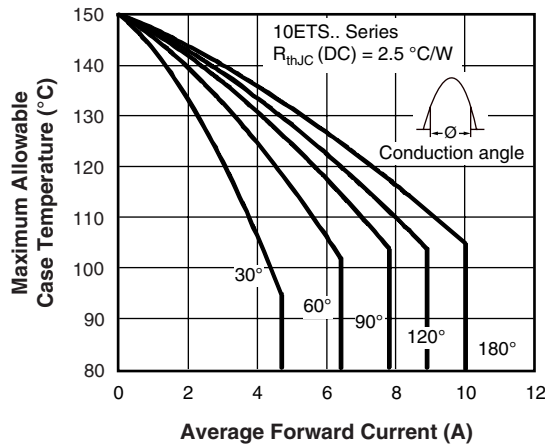


Fig. 1 - Current Rating Characteristics

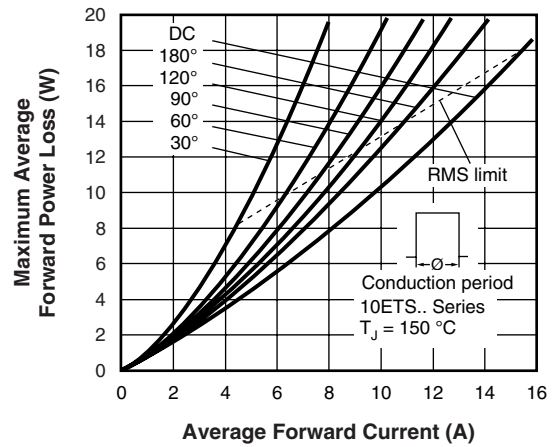


Fig. 4 - Forward Power Loss Characteristics

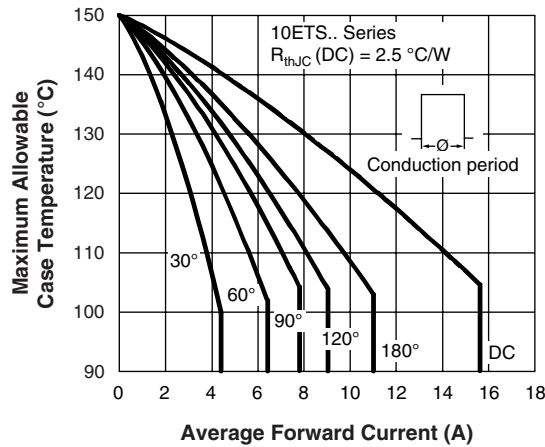


Fig. 2 - Current Rating Characteristics

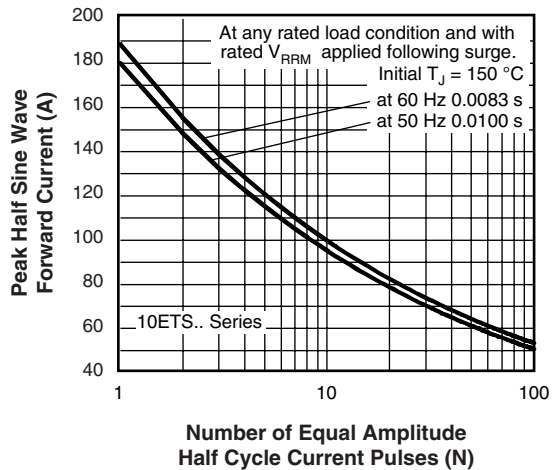


Fig. 5 - Maximum Non-Repetitive Surge Current

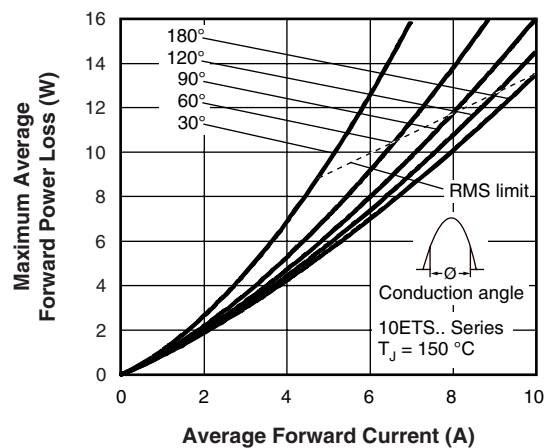


Fig. 3 - Forward Power Loss Characteristics

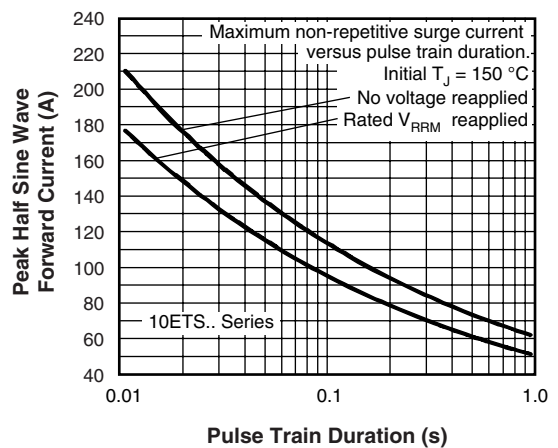


Fig. 6 - Maximum Non-Repetitive Surge Current



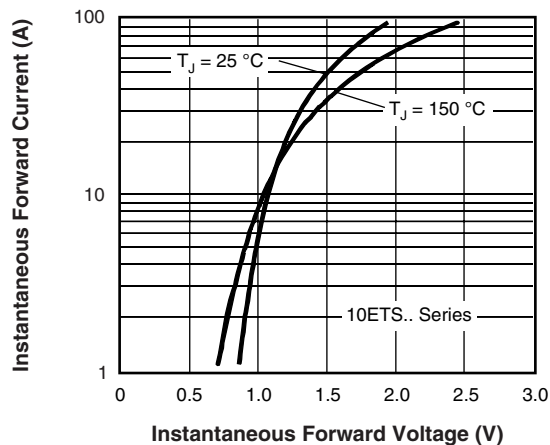


Fig. 7 - Forward Voltage Drop Characteristics

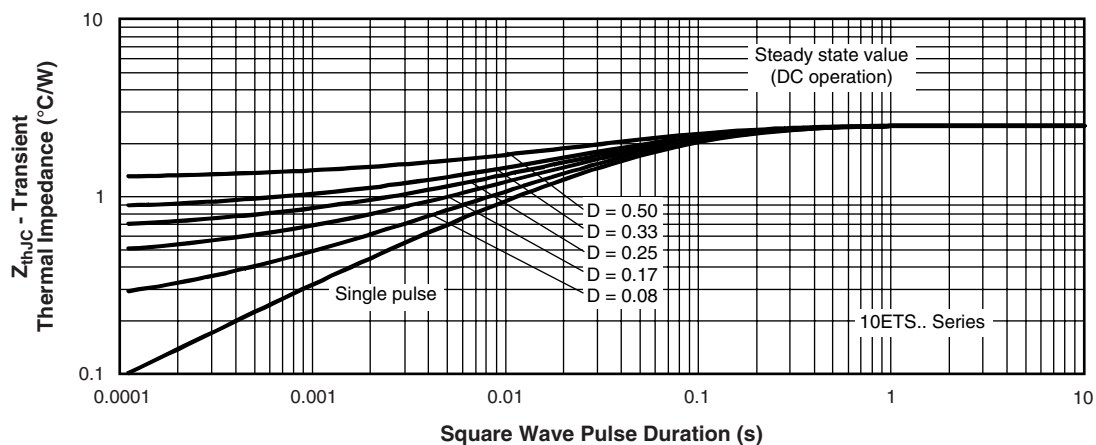


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics



# 10ETS..S High Voltage Series

Input Rectifier Diode, 10 A Vishay High Power Products

## ORDERING INFORMATION TABLE

Device code	10	E	T	S	12	S	TRL	-
	①	②	③	④	⑤	⑥	⑦	⑧
	1	2	3	4	5	6	7	8
	<ul style="list-style-type: none"><li>- Current rating (10 = 10 A)</li></ul>							
	<ul style="list-style-type: none"><li>- Circuit configuration</li><li>E = Single diode</li></ul>							
	<ul style="list-style-type: none"><li>- Package</li><li>T = TO-220AC</li></ul>							
	<ul style="list-style-type: none"><li>- Type of silicon</li><li>S = Standard recovery rectifier</li></ul>							
	<ul style="list-style-type: none"><li>- Voltage code x 100 = <math>V_{RRM}</math></li></ul>							
	<ul style="list-style-type: none"><li>- S = TO-220 D<sup>2</sup>PAK (SMD-220) version</li></ul>							
	<ul style="list-style-type: none"><li>- • None = Tube</li><li>• TRL = Tape and reel (left oriented)</li><li>• TRR = Tape and reel (right oriented)</li></ul>							
	<ul style="list-style-type: none"><li>- • None = Standard production</li><li>• PbF = Lead (Pb)-free</li></ul>							

08 = 800 V
10 = 1000 V
12 = 1200 V

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95046">http://www.vishay.com/doc?95046</a>
Part marking information	<a href="http://www.vishay.com/doc?95054">http://www.vishay.com/doc?95054</a>
Packaging information	<a href="http://www.vishay.com/doc?95032">http://www.vishay.com/doc?95032</a>



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.