

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	TLY-1P	NEMA 1-15P, polarized	1	black overmold
2	30-00242	2C, 18 AWG, UL SPT-1, 300V, 105°C, 5.55 mm, VW-1, PVC	1	terminates to stripped and tinned

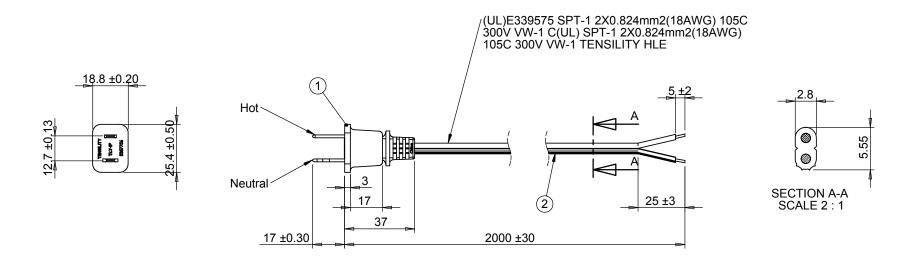

Wiring diagram						
Contact	Wire					
Neutral	Grooved					
Hot	Smooth					

Revision	Date	Description	Notes Cable rated for 10 A at 125 Vac as is.			TENSILITY				
Α	12/17/2012	Initial release								
			RoHS, REACH and Dodd-	20802 Sockeye Place #130						
			Function test: no open, no reversed polarity, no short circuit, no INT			Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202				
						800 877.670.7118 www.tensility.com				
			DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION: Ac cord, 2000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00242	SIZE Part number					
			TOLERANCES: X: ± 0.5 mm		A 11-00011					
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	00 002 12		.E:1:2	WEIGHT:	SHEET 1 OF 1		

5 4 3 2