



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Current Transducer HTFS 200 .. 800-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



All data are given with $R_L = 10 \text{ k}\Omega$

$$I_{PN} = 200 \dots 800 \text{ A}$$



Electrical data

Primary nominal rms current	Primary current measuring range	Type
$I_{PN} \text{ (A)}$	$I_P \text{ (A)}$	
200	± 300	HTFS 200-P
400	± 600	HTFS 400-P
600	± 900	HTFS 600-P
800	± 1200	HTFS 800-P
V_{out}	Output voltage (Analog) @ I_P $I_P = 0$	$V_{ref} \pm (1.25 \cdot I_P / I_{PN}) \text{ V}$ $V_{ref} \pm 0.025 \text{ V}$
V_{ref}	Reference voltage	$1/2 U_C \pm 0.025 \text{ V}$
	V_{ref} Output impedance	Typ. 200 Ω
	V_{ref} Load impedance	$\geq 200 \text{ k}\Omega$
R_L	Load resistance	$\geq 2 \text{ k}\Omega$
R_{out}	Output internal resistance	$< 5 \Omega$
C_L	Capacitive loading	4.7 nF
U_C	Supply voltage ($\pm 5 \%$)	5 V
I_C	Current consumption @ $U_C = 5 \text{ V}$	19 (typ) mA 25 (max) mA

Accuracy - Dynamic performance data

X	Accuracy ²⁾ @ I_{PN} , $T_A = 25 \text{ }^\circ\text{C}$	$\leq \pm 1$	%
ϵ_L	Linearity error 0 .. $1.5 \times I_{PN}$	$\leq \pm 0.5$	%
TCV_{OE}	Temperature of coefficient of V_{OE} @ $I_P = 0$,	$\leq \pm 0.1$	mV/K
TCV_{ref}	Temperature of coefficient of V_{ref}	$\leq \pm 190$	ppm/K
TCG	Temperature of coefficient of V_{out}	$\leq \pm 420$	ppm/K
V_{OM}	Magnetic offset voltage @ $I_P = 0$ and specified R_M , after an overload of $3 \times I_{PN,DC}$	$< \pm 0.5$	%
V_{no}	Output voltage noise (DC .. 20 MHz)	< 40	mVpp
t_{ra}	Reaction time to 10 % of I_{PN}	< 2	μs
t_r	Step response time to 90 % of I_{PN}	< 3.5	μs
di/dt	di/dt accurately followed	> 100	A/ μs
BW	Frequency bandwidth (-3 dB) ³⁾	DC .. 240	kHz

Notes: ¹⁾ It is possible to overdrive V_{ref} with an external reference voltage between 0.5 - 2.65 V

²⁾ Excluding offset and magnetic offset voltage

³⁾ Small signal only to avoid excessive heatings of the magnetic core.

Features

- Hall effect measuring principle
- Galvanic separation between primary and secondary circuit
- Low power consumption
- Single power supply +5 V
- Ratiometric offset
- Insulating plastic case recognized according to UL 94-V0
- Fixation by M3 nuts and screws
- $T_A = -40 \text{ }^\circ\text{C} \dots +105 \text{ }^\circ\text{C}$.

Advantages

- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference
- V_{ref} IN/OUT.

Applications

- Forklift drives
- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer HTFS 200 .. 800-P

General data

T_A	Ambient operating temperature	-40 .. +105	°C
T_S	Ambient storage temperature	-40 .. +105	°C
m	Mass	60	g
	Standards	EN 50178: 1997	

Isolation characteristics

U_d	Rms voltage for AC insulation test, 50 Hz, 1 min	2.5	kV
\hat{U}_W	Impulse withstand voltage 1.2/50 μ s	4	kV
U_e	Partial discharge extinction rms voltage @ 10 pC	>1	kV
		Min	
d_{Cp}	Creepage distance	>4	mm
d_{Cl}	Clearance	>4	mm
CTI	Comparative Tracking Index (group IIIa)	>220	V

Applications examples

	EN 50178	IEC 61010-1
$d_{Cp}, d_{Cl}, \hat{U}_W$	Rated insulation voltage	Nominal voltage
Basic insulation	300 V	300 V
Reinforced insulation	150 V	150 V

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.


Main supply must be able to be disconnected.

HTFS measuring range with external V_{ref}

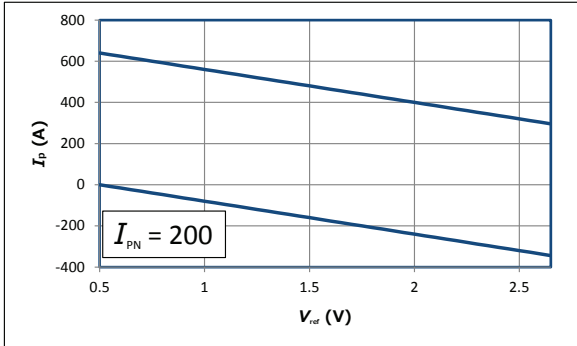

Upper limit: $I_p = -160 \times V_{ref} + 720$ ($V_{ref} = 0.5 \dots 2.65$ V)


Lower limit: $I_p = -160 \times V_{ref} + 80$ ($V_{ref} = 0.5 \dots 2.65$ V)

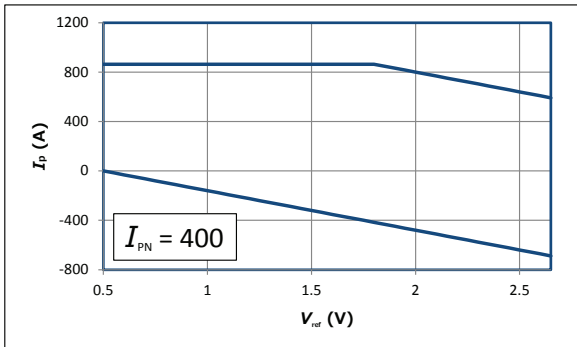

Upper limit: $I_p = 864$ ($V_{ref} = 0.5 \dots 1.8$ V)

Upper limit: $I_p = -320 \times V_{ref} + 1440$ ($V_{ref} = 1.8 \dots 2.65$ V)


Lower limit: $I_p = -320 \times V_{ref} + 160$ ($V_{ref} = 0.5 \dots 2.65$ V)

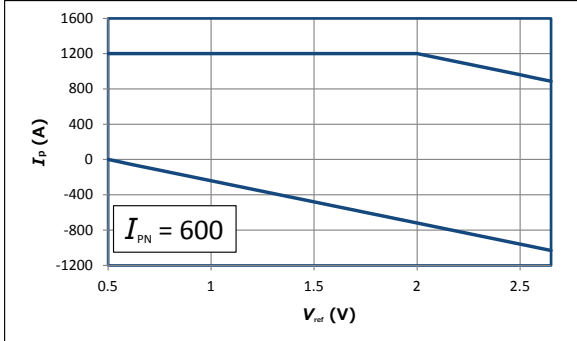

Upper limit: $I_p = 1200$ ($V_{ref} = 0.5 \dots 2.0$ V)

Upper limit: $I_p = -480 \times V_{ref} + 2160$ ($V_{ref} = 2.0 \dots 2.65$ V)

Lower limit: $I_p = -480 \times V_{ref} + 240$ ($V_{ref} = 0.5 \dots 2.65$ V)

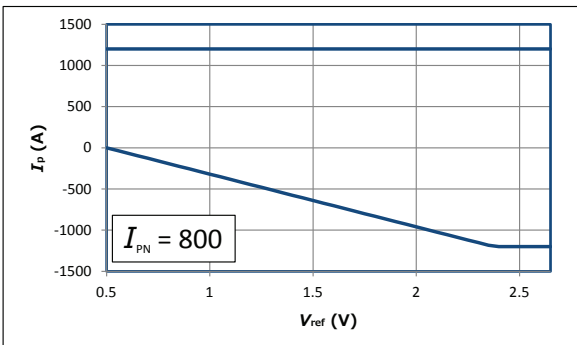


Upper limit: $I_p = 1200$ ($V_{ref} = 0.5 \dots 2.625$ V)

Upper limit: $I_p = -640 \times V_{ref} + 2880$ ($V_{ref} = 2.625 \dots 2.65$ V)

Lower limit: $I_p = -640 \times V_{ref} + 320$ ($V_{ref} = 0.5 \dots 2.4$ V)

Lower limit: $I_p = -1200$ ($V_{ref} = 2.4 \dots 2.65$ V)

Dimensions HTFS 200 .. 800-P (in mm)

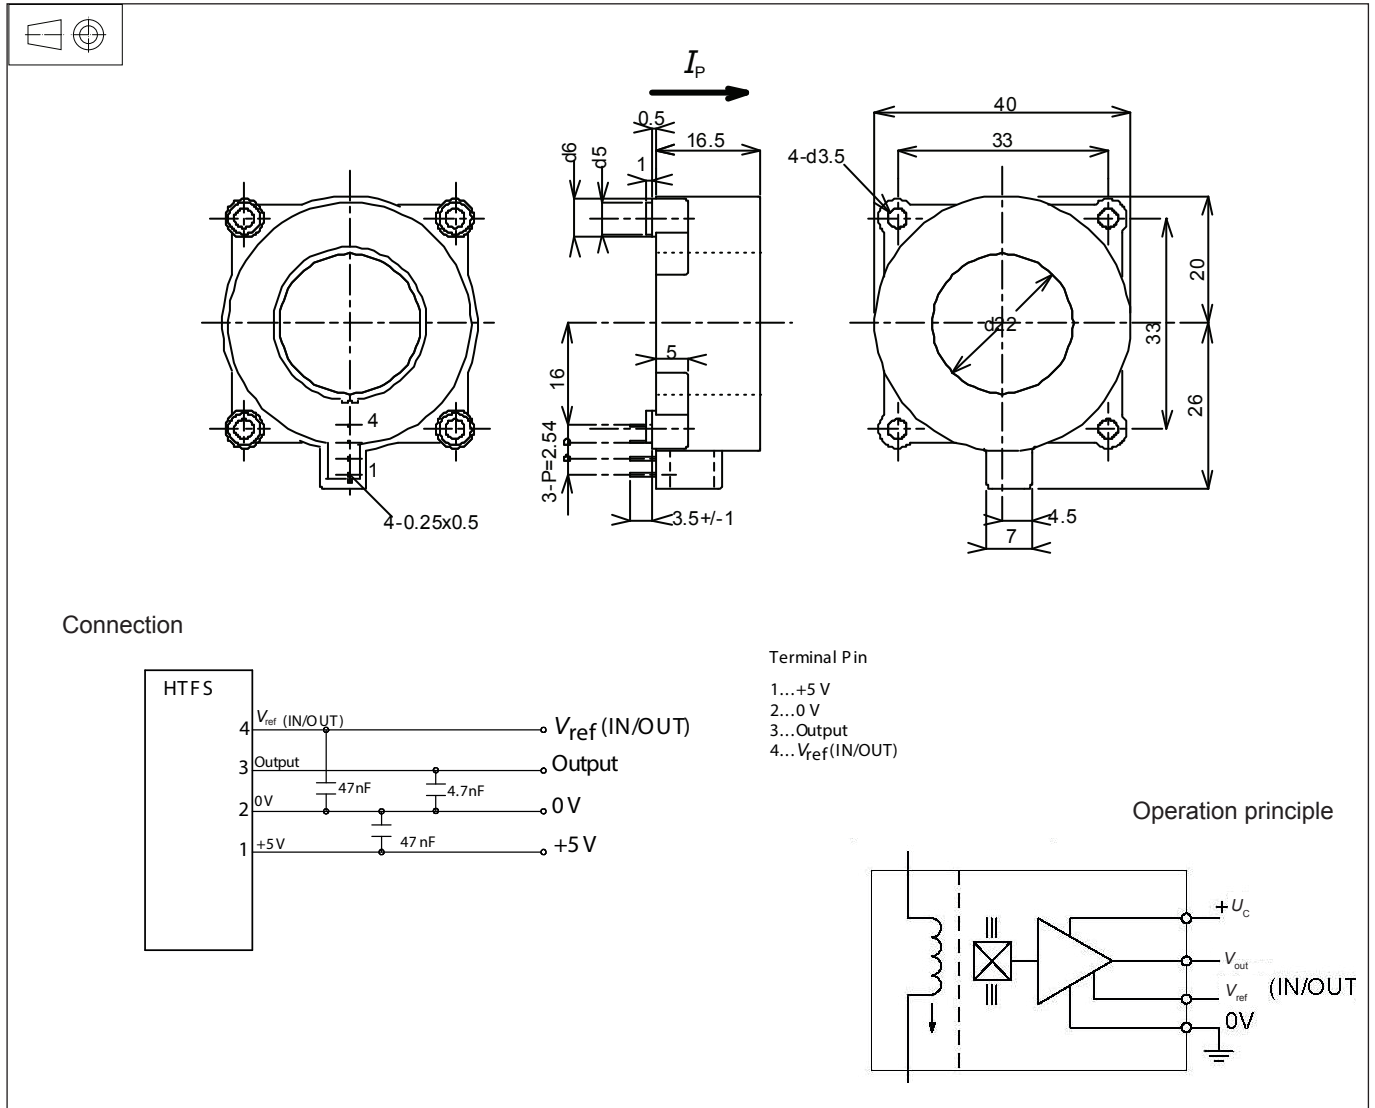

Mechanical characteristics

- General tolerance ±0.2 mm
- Fixation to PCB 4 × M3 (not supplied)
Recommended PCB hole <2.5 N·m
- Connection to secondary 4 pins 0.5 × 0.25 mm
Recommended PCB hole ø 0.7 mm

Remarks

- V_{out} is positive when I_p flows in the direction of the arrow.
- **Temperature of the primary conductor should not exceed 120 °C.**