



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Non-Insulated Brazed Seam Ring Tongue

Terminal Type Ring
 Terminal Style Standard
 Insulation Material Non-Insulated
 Barrel Style Brazed
 RoHS 2011/65/EU Yes

Agency Approval



Manufacturing Origin




| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|
| 11-2S-W | 054007-27927 | 22 - 18 AWG | 2 | 0.25" | 0.23" | 0.60" | 0.48" | 0.030" | 0.070" |
| 11-4S-W | 054007-27928 | 22 - 18 AWG | 4 | 0.25" | 0.22" | 0.60" | 0.47" | 0.030" | 0.070" |
| 11-6S-W | 054007-27930 | 22 - 18 AWG | 6 | 0.25" | 0.22" | 0.60" | 0.47" | 0.030" | 0.070" |
| L-11-6-W | 054007-27933 | 22 - 18 AWG | 6 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.070" |
| 11-8-W | 054007-27935 | 22 - 18 AWG | 8 | 0.33" | 0.29" | 0.70" | 0.54" | 0.030" | 0.070" |
| L-11-8-W | 054007-27936 | 22 - 18 AWG | 8 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.070" |
| 11-10-W | 054007-27937 | 22 - 18 AWG | 10 | 0.33" | 0.29" | 0.70" | 0.54" | 0.030" | 0.070" |
| L-11-10-W | 054007-27938 | 22 - 18 AWG | 10 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.070" |
| 11-14S-W | 054007-27939 | 22 - 18 AWG | 1/4" | 0.47" | 0.40" | 0.89" | 0.65" | 0.030" | 0.070" |
| 11-56S-W | 054007-27941 | 22 - 18 AWG | 5/16" | 0.47" | 0.40" | 0.88" | 0.65" | 0.030" | 0.070" |
| 11-38-W | 054007-27943 | 22 - 18 AWG | 3/8" | 0.56" | 0.40" | 0.88" | 0.65" | 0.030" | 0.070" |
| 12-4S-W | 054007-28330 | 16 - 14 AWG | 4 | 0.25" | 0.22" | 0.60" | 0.47" | 0.030" | 0.090" |
| 12-6S-W | 054007-28332 | 16 - 14 AWG | 6 | 0.25" | 0.22" | 0.60" | 0.47" | 0.030" | 0.090" |
| 12-6-W | 054007-28333 | 16 - 14 AWG | 6 | 0.33" | 0.29" | 0.70" | 0.54" | 0.030" | 0.090" |
| L-12-6-W | 054007-28334 | 16 - 14 AWG | 6 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.090" |
| 12-8S-W | 054007-28335 | 16 - 14 AWG | 8 | 0.25" | 0.22" | 0.60" | 0.47" | 0.030" | 0.090" |
| 12-8-W | 054007-28336 | 16 - 14 AWG | 8 | 0.33" | 0.29" | 0.70" | 0.54" | 0.030" | 0.090" |
| L-12-8-W | 054007-28337 | 16 - 14 AWG | 8 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.090" |
| 12-10-W | 054007-28338 | 16 - 14 AWG | 10 | 0.33" | 0.29" | 0.70" | 0.54" | 0.030" | 0.090" |
| L-12-10-W | 054007-28339 | 16 - 14 AWG | 10 | 0.31" | 0.33" | 0.74" | 0.58" | 0.030" | 0.090" |
| 12-14S-W | 054007-28340 | 16 - 14 AWG | 1/4" | 0.47" | 0.40" | 0.89" | 0.65" | 0.030" | 0.090" |
| 12-14-W | 054007-28341 | 16 - 14 AWG | 1/4" | 0.56" | 0.40" | 0.93" | 0.65" | 0.030" | 0.090" |
| 12-38-W | 054007-28344 | 16 - 14 AWG | 3/8" | 0.56" | 0.40" | 0.93" | 0.65" | 0.030" | 0.090" |
| 12-56S-W | 054007-28342 | 16 - 14 AWG | 5/16" | 0.47" | 0.40" | 0.89" | 0.65" | 0.030" | 0.090" |
| 12-56-W | 054007-28343 | 16 - 14 AWG | 5/16" | 0.56" | 0.40" | 0.93" | 0.65" | 0.030" | 0.090" |
| 13-6S-W | 054007-28734 | 12 - 10 AWG | 6 | 0.28" | 0.29" | 0.68" | 0.54" | 0.040" | 0.135" |
| 13-6-W | 054007-28735 | 12 - 10 AWG | 6 | 0.38" | 0.29" | 0.73" | 0.54" | 0.040" | 0.135" |
| 13-8S-W | 054007-28736 | 12 - 10 AWG | 8 | 0.28" | 0.29" | 0.68" | 0.54" | 0.040" | 0.135" |
| 13-8-W | 054007-28737 | 12 - 10 AWG | 8 | 0.38" | 0.29" | 0.73" | 0.54" | 0.040" | 0.135" |
| 13-10-W | 054007-28738 | 12 - 10 AWG | 10 | 0.38" | 0.29" | 0.73" | 0.54" | 0.040" | 0.135" |
| 13-14S-W | 054007-28739 | 12 - 10 AWG | 1/4" | 0.54" | 0.44" | 0.96" | 0.69" | 0.040" | 0.135" |
| 13-14-W | 054007-28740 | 12 - 10 AWG | 1/4" | 0.59" | 0.44" | 0.99" | 0.69" | 0.040" | 0.135" |
| 13-56S-W | 054007-28741 | 12 - 10 AWG | 5/16" | 0.54" | 0.44" | 0.96" | 0.69" | 0.040" | 0.135" |
| 13-56-W | 054007-28742 | 12 - 10 AWG | 5/16" | 0.59" | 0.44" | 0.99" | 0.69" | 0.040" | 0.135" |
| 13-38S-W | 054007-28743 | 12 - 10 AWG | 3/8" | 0.54" | 0.44" | 0.96" | 0.69" | 0.040" | 0.135" |
| 13-38-W | 054007-28744 | 12 - 10 AWG | 3/8" | 0.59" | 0.44" | 0.99" | 0.69" | 0.040" | 0.135" |
| 13-500-W | 054007-28746 | 12 - 10 AWG | 1/2" | 0.75" | 0.57" | 1.19" | 0.82" | 0.040" | 0.135" |
| 14-10S-W | 054007-29074 | 8 AWG | 10 | 0.47" | 0.40" | 0.95" | 0.72" | 0.050" | 0.175" |


Non-Insulated Brazed Seam Ring Tongue (continued)

| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|
| 14-14S-W | 054007-29076 | 8 AWG | 1/4" | 0.47" | 0.40" | 0.95" | 0.72" | 0.050" | 0.175" |
| 14-56-W | 054007-29078 | 8 AWG | 5/16" | 0.59" | 0.45" | 1.06" | 0.77" | 0.050" | 0.175" |
| 14-38-W | 054007-29079 | 8 AWG | 3/8" | 0.59" | 0.45" | 1.06" | 0.77" | 0.050" | 0.175" |
| 14-716S-W | 054007-29080 | 8 AWG | 7/16" | 0.81" | 0.69" | 1.41" | 1.00" | 0.050" | 0.175" |
| 14-500-W | 000000-00000 | 8 AWG | 1/2" | 0.81" | 0.69" | 1.41" | 1.00" | 0.050" | 0.175" |
| 14-500S-W | 054007-29082 | 8 AWG | 1/2" | 0.81" | 0.69" | 1.41" | 1.00" | 0.050" | 0.175" |
| 15-10S-W | 054007-29102 | 6 AWG | 10 | 0.47" | 0.52" | 1.14" | 0.91" | 0.050" | 0.250" |
| 15-14S-W | 054007-29104 | 6 AWG | 1/4" | 0.47" | 0.52" | 1.14" | 0.91" | 0.050" | 0.250" |
| 15-56-W | 054007-29106 | 6 AWG | 5/16" | 0.63" | 0.52" | 1.22" | 0.91" | 0.050" | 0.250" |
| 15-38-W | 054007-29107 | 6 AWG | 3/8" | 0.63" | 0.52" | 1.22" | 0.91" | 0.050" | 0.250" |
| 15-500S-W | 054007-29110 | 6 AWG | 1/2" | 0.81" | 0.63" | 1.42" | 1.02" | 0.050" | 0.250" |
| 15-58-W | 054007-29112 | 6 AWG | 5/8" | 1.13" | 1.02" | 1.97" | 1.41" | 0.050" | 0.250" |
| 16-10-W | 054007-29130 | 4 AWG | 10 | 0.68" | 0.53" | 1.34" | 1.00" | 0.075" | 0.280" |
| 16-14-W | 054007-29131 | 4 AWG | 1/4" | 0.68" | 0.53" | 1.34" | 1.00" | 0.075" | 0.280" |
| 16-56-W | 054007-29132 | 4 AWG | 5/16" | 0.68" | 0.53" | 1.34" | 1.00" | 0.075" | 0.280" |
| 16-38-W | 054007-29133 | 4 AWG | 3/8" | 0.68" | 0.53" | 1.34" | 1.00" | 0.075" | 0.280" |
| 16-500S-W | 054007-29136 | 4 AWG | 1/2" | 0.68" | 0.53" | 1.34" | 1.00" | 0.075" | 0.280" |

Vinyl Insulated Butted Seam Ring Tongue

Terminal Type Ring
 Terminal Style Standard
 Insulation Material Vinyl
 Barrel Style Butted
 RoHS 2011/65/EU Yes
 Agency Approval 

Manufacturing Origin 

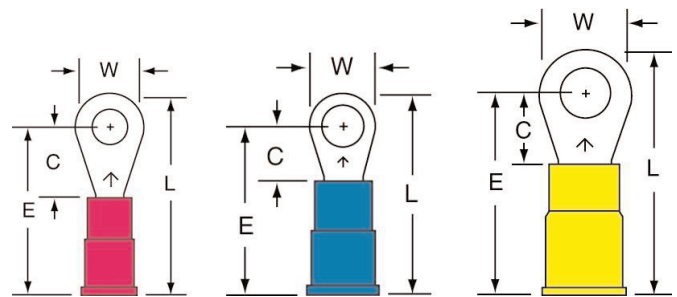




| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. | Max. Insul. Dia. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|
| 11-4S-P | 054007-27894 | 22 - 18 AWG | 4 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| 11-6S-P | 054007-27896 | 22 - 18 AWG | 6 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| L-11-6-P | 054007-27899 | 22 - 18 AWG | 6 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.070" | 0.145" |
| 11-8S-P | 054007-27900 | 22 - 18 AWG | 8 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| 11-8-P | 054007-27901 | 22 - 18 AWG | 8 | 0.33" | 0.29" | 0.90" | 0.74" | 0.030" | 0.070" | 0.145" |
| L-11-8-P | 054007-27902 | 22 - 18 AWG | 8 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.070" | 0.145" |
| 11-10-P | 054007-27903 | 22 - 18 AWG | 10 | 0.33" | 0.29" | 0.90" | 0.74" | 0.030" | 0.070" | 0.145" |
| L-11-10-P | 054007-27904 | 22 - 18 AWG | 10 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.070" | 0.145" |
| 11-14S-P | 054007-27905 | 22 - 18 AWG | 1/4" | 0.47" | 0.40" | 1.08" | 0.85" | 0.030" | 0.070" | 0.145" |
| 11-56S-P | 054007-27907 | 22 - 18 AWG | 5/16" | 0.47" | 0.40" | 1.08" | 0.85" | 0.030" | 0.070" | 0.145" |
| 11-38-P | 054007-27909 | 22 - 18 AWG | 3/8" | 0.56" | 0.40" | 1.13" | 0.85" | 0.030" | 0.070" | 0.145" |
| 12-4S-P | 054007-28298 | 16 - 14 AWG | 4 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| 12-6S-P | 054007-28300 | 16 - 14 AWG | 6 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| 12-6-P | 054007-28301 | 16 - 14 AWG | 6 | 0.33" | 0.29" | 0.90" | 0.74" | 0.030" | 0.090" | 0.170" |
| L-12-6-P | 054007-28302 | 16 - 14 AWG | 6 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.090" | 0.170" |

Vinyl Insulated Butted Seam Ring Tongue (continued)

| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. | Max. Insul. Dia. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|
| 12-8-P | 054007-28304 | 16 - 14 AWG | 8 | 0.33" | 0.29" | 0.90" | 0.74" | 0.030" | 0.070" | 0.145" |
| L-12-8-P | 054007-28305 | 16 - 14 AWG | 8 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.070" | 0.145" |
| 12-8S-P | 054007-28303 | 16 - 14 AWG | 8 | 0.25" | 0.22" | 0.80" | 0.67" | 0.030" | 0.070" | 0.145" |
| 12-10-P | 054007-28306 | 16 - 14 AWG | 10 | 0.33" | 0.29" | 0.90" | 0.74" | 0.030" | 0.070" | 0.145" |
| L-12-10-P | 054007-28307 | 16 - 14 AWG | 10 | 0.31" | 0.33" | 0.93" | 0.78" | 0.030" | 0.070" | 0.145" |
| 12-14S-P | 054007-28308 | 16 - 14 AWG | 1/4" | 0.47" | 0.40" | 1.08" | 0.85" | 0.030" | 0.070" | 0.145" |
| 12-14-P | 054007-28309 | 16 - 14 AWG | 1/4" | 0.56" | 0.40" | 1.13" | 0.85" | 0.030" | 0.090" | 0.170" |
| 12-56S-P | 054007-28310 | 16 - 14 AWG | 5/16" | 0.47" | 0.40" | 1.08" | 0.85" | 0.030" | 0.070" | 0.145" |
| 12-56-P | 054007-28311 | 16 - 14 AWG | 5/16" | 0.56" | 0.40" | 1.13" | 0.85" | 0.030" | 0.090" | 0.170" |
| 12-38-P | 054007-28312 | 16 - 14 AWG | 3/8" | 0.56" | 0.40" | 1.13" | 0.85" | 0.030" | 0.070" | 0.145" |
| 13-4S-P | 054007-28705 | 12 - 10 AWG | 4 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-6S-P | 054007-28706 | 12 - 10 AWG | 6 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-6-P | 054007-28707 | 12 - 10 AWG | 6 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-8S-P | 054007-28708 | 12 - 10 AWG | 8 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-8-P | 054007-28709 | 12 - 10 AWG | 8 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-10-P | 054007-28710 | 12 - 10 AWG | 10 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-14S-P | 054007-28711 | 12 - 10 AWG | 1/4" | 0.53" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-14-P | 054007-28712 | 12 - 10 AWG | 1/4" | 0.59" | 0.44" | 1.29" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-38S-P | 054007-28715 | 12 - 10 AWG | 3/8" | 0.54" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-56S-P | 054007-28713 | 12 - 10 AWG | 5/16" | 0.53" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-38-P | 054007-28716 | 12 - 10 AWG | 3/8" | 0.59" | 0.44" | 1.29" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-716-P | 054007-28717 | 12 - 10 AWG | 7/16" | 0.75" | 0.57" | 1.49" | 1.12" | 0.040" | 0.135" | 0.250" |
| 13-500-P | 054007-28718 | 12 - 10 AWG | 1/2" | 0.75" | 0.57" | 1.50" | 1.12" | 0.040" | 0.135" | 0.250" |

Nylon Insulated with Insulation Grip Ring Tongue

Terminal Type Ring
Terminal Style Standard
Insulation Material Nylon with Insulation Grip
Barrel Style Butted
RoHS 2011/65/EU Yes
Agency Approval 
Manufacturing Origin  With U.S. and Global Content

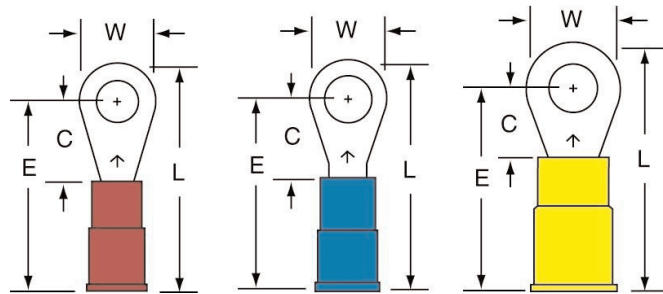

| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. | Max. Insul. Dia. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|
| 11-4S-NB | 054007-27878 | 22 - 18 AWG | 4 | 0.25" | 0.22" | 0.79" | 0.66" | 0.030" | 0.070" | 0.145" |
| 11-6S-NB | 054007-27880 | 22 - 18 AWG | 6 | 0.25" | 0.22" | 0.79" | 0.66" | 0.030" | 0.070" | 0.145" |
| L-11-6-NB | 054007-27882 | 22 - 18 AWG | 6 | 0.31" | 0.33" | 0.92" | 0.77" | 0.030" | 0.070" | 0.145" |
| 11-8S-NB | 054007-27883 | 22 - 18 AWG | 8 | 0.25" | 0.22" | 0.79" | 0.66" | 0.030" | 0.070" | 0.145" |
| 11-8-NB | 054007-27884 | 22 - 18 AWG | 8 | 0.33" | 0.29" | 0.89" | 0.73" | 0.030" | 0.070" | 0.145" |
| L-11-8-NB | 054007-27885 | 22 - 18 AWG | 8 | 0.31" | 0.33" | 0.92" | 0.77" | 0.030" | 0.070" | 0.145" |

3M™ Terminals: 3M™ Ring Tongues

Nylon Insulated with Insulation Grip Ring Tongue (continued)

| Product No. | UPC | Conductor Size | Stud Size | (W) | (C) | (L) | (E) | Thickness | Barrel I.D. | Max. Insul. Dia. |
|-------------|--------------|----------------|-----------|-------|-------|-------|-------|-----------|-------------|------------------|
| 11-10-NB | 054007-27886 | 22 - 18 AWG | 10 | 0.33" | 0.29" | 0.89" | 0.73" | 0.030" | 0.070" | 0.145" |
| L-11-10-NB | 054007-27887 | 22 - 18 AWG | 10 | 0.31" | 0.33" | 0.92" | 0.77" | 0.030" | 0.070" | 0.145" |
| 11-14S-NB | 054007-27888 | 22 - 18 AWG | 1/4" | 0.47" | 0.40" | 1.07" | 0.84" | 0.030" | 0.070" | 0.145" |
| 11-56S-NB | 054007-27890 | 22 - 18 AWG | 5/16" | 0.47" | 0.40" | 1.07" | 0.84" | 0.030" | 0.070" | 0.145" |
| 11-38-NB | 054007-27892 | 22 - 18 AWG | 3/8" | 0.56" | 0.40" | 1.12" | 0.84" | 0.030" | 0.070" | 0.145" |
| 12-4S-NB | 054007-28282 | 16 - 14 AWG | 4 | 0.25" | 0.22" | 0.81" | 0.68" | 0.030" | 0.090" | 0.170" |
| 12-6S-NB | 054007-28284 | 16 - 14 AWG | 6 | 0.25" | 0.22" | 0.81" | 0.68" | 0.030" | 0.090" | 0.170" |
| 12-6-NB | 054007-28285 | 16 - 14 AWG | 6 | 0.33" | 0.29" | 0.91" | 0.75" | 0.030" | 0.090" | 0.170" |
| L-12-6-NB | 054007-28286 | 16 - 14 AWG | 6 | 0.31" | 0.33" | 0.94" | 0.79" | 0.030" | 0.090" | 0.170" |
| 12-8-NB | 054007-28288 | 16 - 14 AWG | 8 | 0.33" | 0.29" | 0.91" | 0.75" | 0.030" | 0.090" | 0.170" |
| 12-8S-NB | 054007-28287 | 16 - 14 AWG | 8 | 0.25" | 0.22" | 0.81" | 0.68" | 0.030" | 0.090" | 0.170" |
| L-12-8-NB | 054007-28289 | 16 - 14 AWG | 8 | 0.31" | 0.33" | 0.94" | 0.79" | 0.030" | 0.090" | 0.170" |
| 12-10-NB | 054007-28290 | 16 - 14 AWG | 10 | 0.33" | 0.29" | 0.91" | 0.75" | 0.030" | 0.090" | 0.170" |
| L-12-10-NB | 054007-28291 | 16 - 14 AWG | 10 | 0.31" | 0.33" | 0.94" | 0.79" | 0.030" | 0.090" | 0.170" |
| 12-14-NB | 054007-28293 | 16 - 14 AWG | 1/4" | 0.56" | 0.40" | 1.14" | 0.86" | 0.030" | 0.090" | 0.170" |
| 12-14S-NB | 054007-28292 | 16 - 14 AWG | 1/4" | 0.47" | 0.40" | 1.09" | 0.86" | 0.030" | 0.090" | 0.170" |
| 12-56S-NB | 054007-28294 | 16 - 14 AWG | 5/16" | 0.47" | 0.40" | 1.09" | 0.86" | 0.030" | 0.090" | 0.170" |
| 12-56-NB | 054007-28295 | 16 - 14 AWG | 5/16" | 0.56" | 0.40" | 1.14" | 0.86" | 0.030" | 0.090" | 0.170" |
| 12-38-NB | 054007-28296 | 16 - 14 AWG | 3/8" | 0.56" | 0.40" | 1.14" | 0.86" | 0.030" | 0.090" | 0.170" |
| 13-4S-NB | 054007-28691 | 12 - 10 AWG | 4 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-6S-NB | 054007-28692 | 12 - 10 AWG | 6 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-6-NB | 054007-28693 | 12 - 10 AWG | 6 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-8S-NB | 054007-28694 | 12 - 10 AWG | 8 | 0.28" | 0.29" | 0.98" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-8-NB | 054007-28695 | 12 - 10 AWG | 8 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-10-NB | 054007-28696 | 12 - 10 AWG | 10 | 0.38" | 0.29" | 1.03" | 0.84" | 0.040" | 0.135" | 0.250" |
| 13-14S-NB | 054007-28697 | 12 - 10 AWG | 1/4" | 0.53" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-14-NB | 054007-28698 | 12 - 10 AWG | 1/4" | 0.59" | 0.44" | 1.29" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-56S-NB | 054007-28699 | 12 - 10 AWG | 5/16" | 0.53" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-56-NB | 054007-28700 | 12 - 10 AWG | 5/16" | 0.59" | 0.44" | 1.29" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-38S-NB | 054007-28701 | 12 - 10 AWG | 3/8" | 0.54" | 0.44" | 1.26" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-38-NB | 054007-28702 | 12 - 10 AWG | 3/8" | 0.59" | 0.44" | 1.29" | 0.99" | 0.040" | 0.135" | 0.250" |
| 13-716-NB | 054007-28703 | 12 - 10 AWG | 7/16" | 0.75" | 0.57" | 1.49" | 1.12" | 0.040" | 0.135" | 0.250" |
| 13-500-NB | 054007-28704 | 12 - 10 AWG | 1/2" | 0.75" | 0.57" | 1.50" | 1.12" | 0.040" | 0.135" | 0.250" |