



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



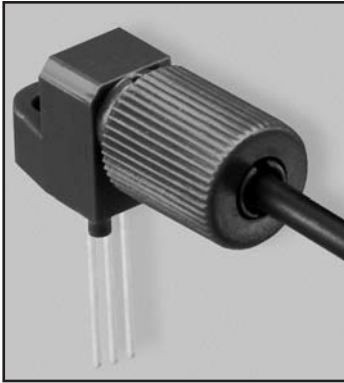

DESCRIPTION

The IF-D95T and IF-D95OC are high-sensitivity photologic detectors housed in “connector-less” style plastic fiber optic packages. The detector contains an IC with a photodiode, linear amplifier, and Schmitt trigger logic circuit. The IF-D95T features a TTL/CMOS compatible totem-pole output, while the IF-D95OC has an open-collector output. The devices can drive up to 5 TTL loads over supply voltages ranging from 4.5 to 16 Volts. Optical response extends from 400 to 1100 nm, making them compatible with a wide range of visible and near infrared LED and laser diode sources. The detector package features an internal micro-lens and a precision-molded PBT housing to ensure efficient optical coupling with standard 1000 μm core plastic fiber cable.

APPLICATION HIGHLIGHTS

The IF-D95T and IF-D95OC are suitable for digital data links at rates up to 125 kbps. A Schmitt trigger improves noise immunity and TTL/CMOS logic compatibility greatly simplifies interfacing with existing digital circuits. The integrated design of the IF-D95 provides a total, cost-effective solution in a variety of digital applications.

APPLICATIONS

- Digital Data Links
- PC-to-Peripheral Links
- Process Control
- Household Appliances
- Motor Controller Triggering
- Electronic Games
- Medical Instruments
- Automotive Electronics
- Robotics Communications
- EMC/EMI Signal Isolation

FEATURES

- ◆ Integrated Photodetector, Amplifier and Schmitt Trigger
- ◆ Mates with Standard 1000 μm Core Jacketed Plastic Fiber Optic Cable
- ◆ No Optical Design Required
- ◆ Inexpensive But Rugged Plastic Connector Housing
- ◆ Internal Micro-Lens for Efficient Optical Coupling
- ◆ Connector-Less Fiber Termination
- ◆ Light-Tight Housing Provides Interference-Free Transmission
- ◆ High Optical Sensitivity
- ◆ “Active Low” Output Options Available as Special Order
- ◆ RoHS Compliant

MAXIMUM RATINGS

($T_A=25^\circ\text{C}$)

Operating and Storage Temperature Range (T_{OP}, T_{STG}).....	-40° to 85°C
Soldering Temperature (2 mm from case bottom) (T_S) $t_s \leq 5s$	240°C
Supply Voltage, (V_S)	16 V
Voltage at Output lead (IF-95OC only)	30 V
Sinking Current, DC (I_C)	50 mA
Source Current (I_O) (IF-95T only)	10 mA
Power Dissipation (P_{TOT}) $T_A=25^\circ\text{C}$	100 mW
De-rate Above 25°C	2.50 mW/°C

CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit
Peak Sensitivity	λ_{PEAK}	-	800	-	nm
Spectral Sensitivity ($S=10\%$ of S_{MAX})	$\Delta\lambda$	400	-	1100	nm
Operating Voltage	V_{CC}	4.5	-	16	V
Supply Current	I_{CC}	-	-	6	mA
Light Required to Trigger $V_{CC}=5\text{ V}, R_L=1\text{ k}, \lambda=660\text{ nm}$	$E_r (+)$	-	1.0 (-30)	-	$\mu\text{W(dBm)}$
IF-D95T					
High Level Output Voltage ($I_{OH}=-1.0\text{ mA}$)	V_{OH}	$V_{CC}-2.1$	-	-	V
Low Level Output Voltage ($I_{OL}=16\text{ mA}$)	V_{OL}	-	-	0.34	V
Output Rise and Fall Times ($f=10.0\text{ kHz}, R_L=10\text{ TTL Loads}$)	t_r, t_f	-	-	70	ns
Propagation Delay, Low-High, High-Low ($f=10.0\text{ kHz}, R_L=10\text{ TTL Loads}$)	t_{PLH}, t_{PHL}	-	8.0	-	μs
IF-D95OC					
High Level Output Current ($V_{OH}=30\text{ V}$)	I_{OH}	-	-	100	μA
Low Level Output Voltage ($I_{OL}=16\text{ mA}$)	V_{OL}	-	-	0.4	V
Output Rise and Fall Times ($f=10.0\text{ kHz}, R_L=360\Omega$)	t_r, t_f	-	-	100	ns
Propagation Delay, Low-High, High-Low ($f=10.0\text{ kHz}, R_L=360\Omega$)	t_{PLH}, t_{PHL}	-	6.0	-	μs

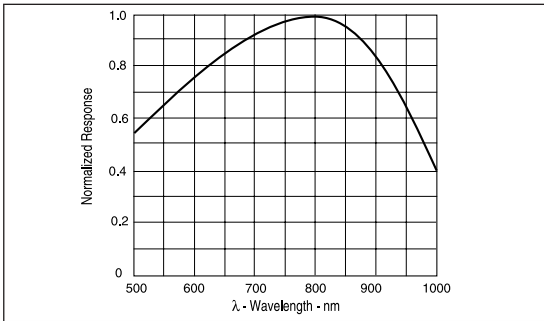


FIGURE 1. Typical detector response versus wavelength.

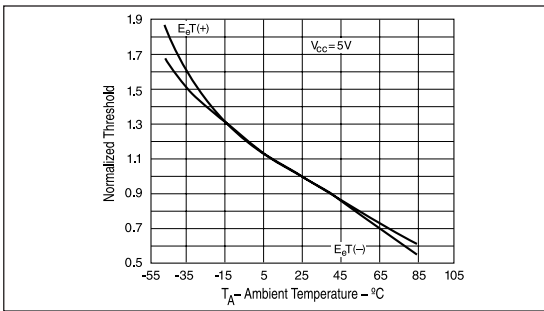


FIGURE 2. Normalized threshold irradiance vs. amb. temp.

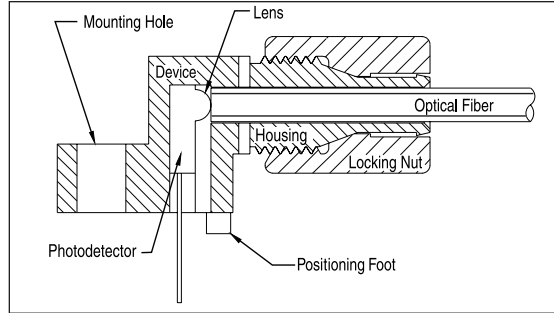


FIGURE 3. Cross-section of fiber optic device.

FIBER TERMINATION INSTRUCTIONS

1. Cut off the ends of the optical fiber with a single-edge razor blade or sharp knife. Try to obtain a precise 90-degree angle (square).
2. Insert the fiber through the locking nut and into the connector until the core tip seats against the internal micro-lens.
3. Screw the connector locking nut down to a snug fit, locking the fiber in place.

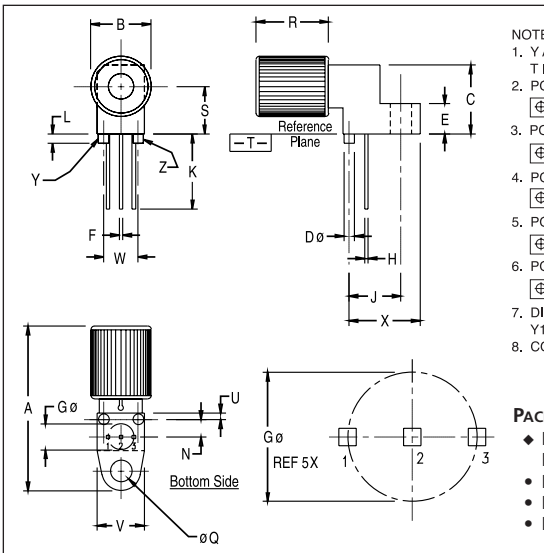


FIGURE 4. Case outline.

NOTES:

1. Y AND Z ARE DATUM DIMENSIONS AND T IS A DATUM SURFACE.
2. POSITIONAL TOLERANCE FOR D ϕ (2 PL):
 $\phi 0.25 (0.010) \text{ (M) } | T | Y \text{ (M) } Z \text{ (M)}$
3. POSITIONAL TOLERANCE FOR F DIM (2 PL):
 $\phi 0.25 (0.010) \text{ (M) } | T | Y \text{ (M) } Z \text{ (M)}$
4. POSITIONAL TOLERANCE FOR H DIM (2 PL):
 $\phi 0.25 (0.010) \text{ (M) } | T | Y \text{ (M) } Z \text{ (M)}$
5. POSITIONAL TOLERANCE FOR Q ϕ :
 $\phi 0.25 (0.010) \text{ (M) } | T | Y \text{ (M) } Z \text{ (M)}$
6. POSITIONAL TOLERANCE FOR B:
 $\phi 0.25 (0.010) \text{ (M) } | T |$
7. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
8. CONTROLLING DIMENSION: INCH

PACKAGE IDENTIFICATION:

- ◆ D95T—Black housing w/ Yellow dot
- ◆ D95OC—Black housing w/ Brown dot
- PIN 1. Ground
- PIN 2. Output
- PIN 3. V_{CC}

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	23.24	25.27	.915	.995
B	8.64	9.14	.340	.360
C	9.91	10.41	.390	.410
D	1.52	1.63	.060	.064
E	4.19	4.70	.165	.185
F	0.43	0.58	.017	.023
G	3.81 BSC		.150 BSC	
H	0.43	0.58	.017	.023
J	7.62 BSC		.300 BSC	
K	10.35	11.87	.408	.468
L	1.14	1.65	.045	.065
N	2.54 BSC		.100 BSC	
Q	3.05	3.30	.120	.130
R	10.48	10.99	.413	.433
S	6.98 BSC		.275 BSC	
U	0.83	1.06	.032	.042
V	6.86	7.11	.270	.280
W	5.08 BSC		.200 BSC	
X	10.10	10.68	.397	.427