



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Me Temperature Sensor-Waterproof(DS18B20)


SKU: 11014 Weight: 60.00 Gram



Description:

This is the temperature sensor based on chip DS18B20 consisting of a waterproof probe and long wire shape, which is perfect for immersive temperature detection or detecting something far away. The DS18B20 provides 9 to 12-bit (configurable) temperature readings over a 1-Wire interface, so that only one wire (and ground) needs to be connected from a central microprocessor.

The original one includes three wires inside, we adjusted it into a 3-pin connector so that you can use it simply with Makeblock Me Adapter. (there is no soldering required to connect to our Me BaseBoard just like below picture).

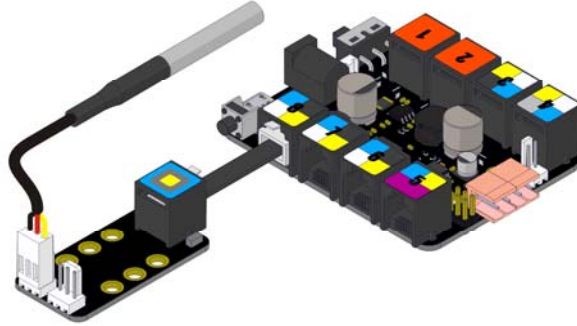

please note that while the sensor is good up to 125°C, the cable which is jacketed in PVC will be damaged easily, so we suggest keeping it under 100°C.

Features:

- Waterproof
- Uses 1-Wire interface- requires only one digital pin for communication
- Stainless steel tube 6mm diameter by 35mm long
- Arduino library for easy programming

Dimensions: Probe is 6mm in diameter and roughly 50mm long. Overall length (including wire) is 0.5 meter

Specification

- Power supply: 3.0V to 5.5V
- Wide temperature range: -55°C to +125°C
- High accuracy: $\pm 0.5^{\circ}\text{C}$ (-10°C to +85°C)

Overview

- The Me Temperature Sensor module is a metal tube thermometer with DS18B20 detector. Featuring strong anti-interference ability and high accuracy, it is covered with waterproof rubber hose outside and able to measure temperature in the range -55°C~+125°C. It can be connected to the RJ25 Adapter module which is then connected to Makeblock Orion for temperature measurement.

Technical specifications

- Operating voltage: 5V DC
- Sensor type: DS18B20
- Temperature range: -55°C~125°C
- Control mode: Single bus port
- Dimension: 500 x 6 x 6mm

Functional characteristics

- 9~12 bits A/D conversion accuracy
- High precision: $\pm 0.5^{\circ}\text{C}$ (-10°C~+85°C)
- Probe diameter 6 mm, length 50 mm approximately, total length 1 m (including line)
- Short time delay in temperature conversion, maximum 750ms
- Support multi-point networking
- Perfect waterproof property
- Support mBlock GUI programming, and applicable to users of all ages

Pin definition

The port of Me Temperature Sensor has three pins, and their functions are as follows:

No.	Pin	Color	Function
1	GND	Black	Grounding
2	VCC	Red	Power supply
3	SIG	Yellow	Output the temperature signal

Wiring mode

- Connecting with RJ25

If you want to connect to a thermometer through the RJ25 port, simply connect it to the RJ25 Adapter module, and then connect the module to Makeblock Orion as follows:

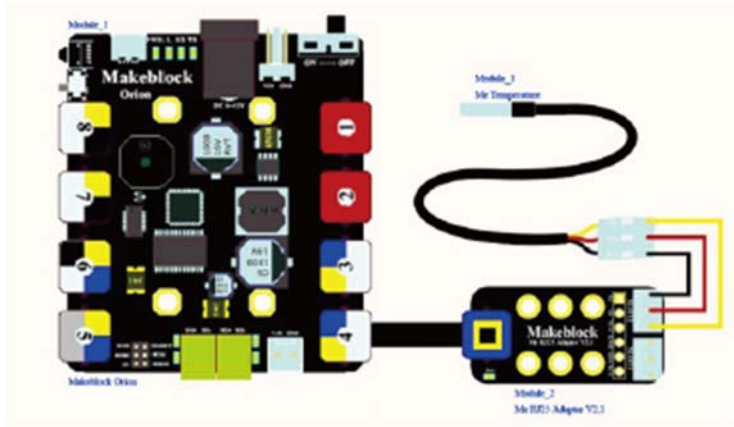


Figure 1 Connecting Me Temperature Sensor to Makeblock Orion

- Connecting with Dupont wire

When the Dupont wire is used to connect the module to the Arduino UNO Baseboard, its SIG pin should be connected to digital port as follows:

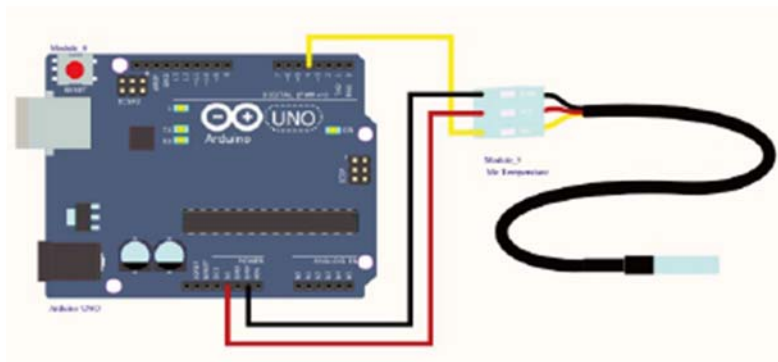


Figure 2 Connecting Me Temperature Sensor to Arduino UNO

Guide to programming

- Arduino programming

If you use Arduino to write a program, the library Makeblock-Library-master should be invoked to control the Me Temperature Sensor-Waterproof.

This program serves to read current temperature through Arduino programming.


```
01 #include "MeOrion.h"
02 #include <Wire.h>
03 #include <SoftwareSerial.h>
04
05 MeTemperature myTemp(PORT_4, SLOT2);
06
07 void setup()
08 {
09     Serial.begin(9600);
10 }
11
12 void loop()
13 {
14     Serial.print("Temperature=");
15     Serial.println(myTemp.temperature());
16     delay(1000);
17 }
```

Function List of Me Temperature Sensor-Waterproof

Function name	Function
MeTemperature(uint8_t port,uint8_t slot)	Select a port
reset(uint8_t port,uint8_t slot)	Reset the port and slot
temperature()	Read temperature value


The code segment serves to read the readings of Me Temperature Sensor and output the result to the serial monitor in Arduino IDE with the cycle of 1s.

Upload the code segment to Makeblock Orion, click the Arduino serial monitor and you will see the running result as follows:

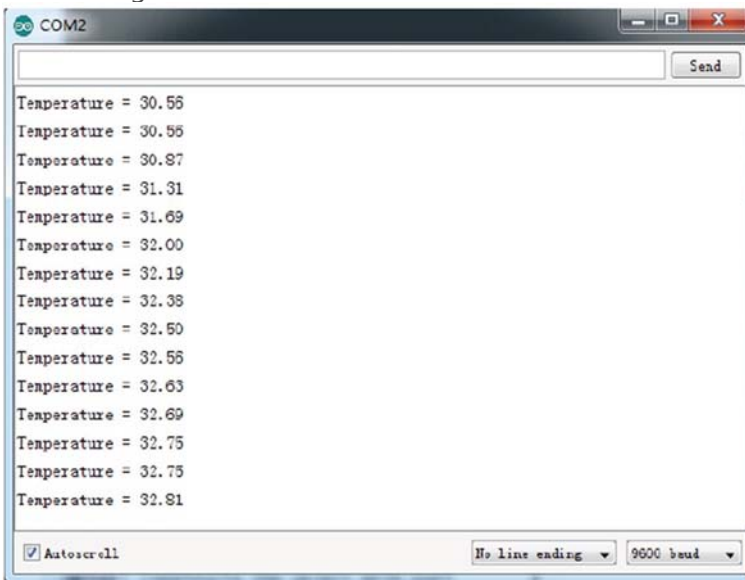


- mBlock programming

The Me Temperature Sensor-Waterproof module supports the mBlock programming environment and its instructions are introduced as follows:

Programming description	Introduction
	Parameter 1: Select a port Parameter 2: Select a slot Function: Read the value of temperature

This is an example on how to use mBlock to control the Me Temperature Sensor module.

It will make the panda speaking out the value of temperature captured by the Me Temperature Sensor, and the running result is as follows:

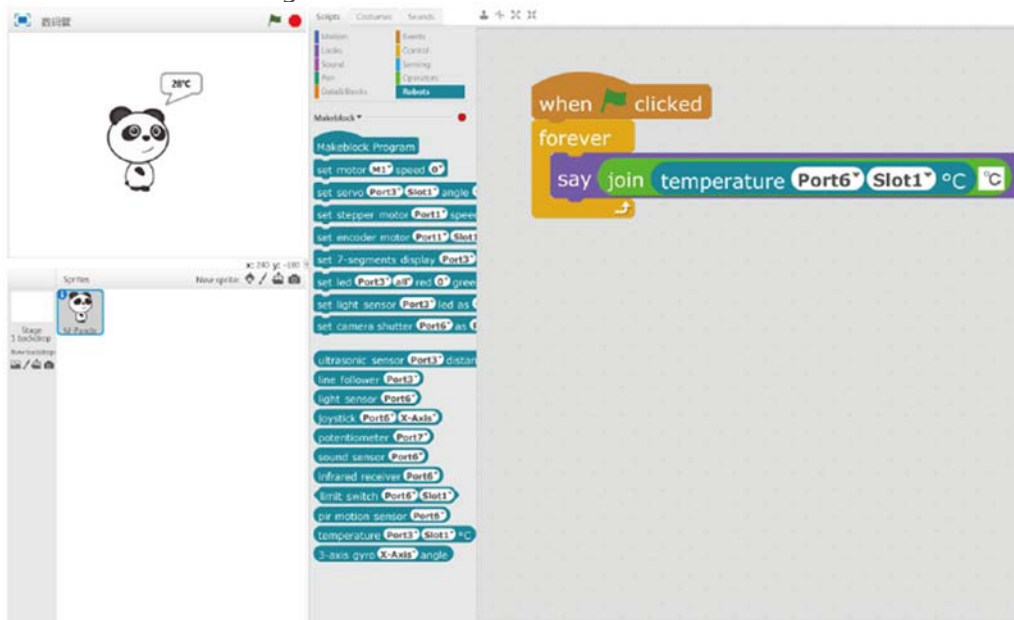

Principle analysis

With the main component DS18B20, the Me Temperature Sensor module features miniaturization, low power consumption, high performance, strong anti-interference ability, and matching with microprocessor easily. Adopting unique single bus port mode, DS18B20 is in connection with a microprocessor by only a bus to implement two-way communication between the microprocessor and DS18B20. The module supports the function of multi-point networking, so several DS18B20 can be connected in parallel on the only three-line to implement multi-point temperature measurement, and the measurement results are transmitted in 9~12 bits serial digital mode. When communicated with a single chip computer, you can set the resolution by configuring the register.

The temperature sensor in DS18B20 implements measurement of temperature and provides results in 16-bit binary, in which S is the sign bit.

	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
LS Byte	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
	bit 15	bit 14	bit 13	bit 12	bit 11	bit 10	bit 9	bit 8
MS Byte	S	S	S	S	S	2^6	2^5	2^4

For example:

The digital output of +125°C is 07D0H (For a positive temperature, directly convert the hexadecimal number into a decimal number).

The digital output of -55°C is FC90H (For a negative temperature, invert the hexadecimal number and increase it by 1, and then convert into a decimal number).

温度/℃	二进制表示	十六进制表示
+125	00000111 11010000	07D0H
+25.0625	00000001 10010001	0191H
+10.125	00000000 10100010	00A2H
+0.5	00000000 00001000	0008H
0	00000000 00000000	0000H
-0.5	11111111 11111000	FF18H
-10.125	11111111 01011110	FF5EH
-25.0625	11111110 01101111	FE6FH
-55	11111100 10010000	FC90H