# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# International **ISR** Rectifier

February 28, 2011 Datasheet No – 97481

**General Driver** 

6V - 20V

2.3A & 3.3A

50ns & 50ns

## IRS4426/IRS4427/IRS4428 DUAL LOW SIDE DRIVER

**Product Summary** 

I<sub>0+</sub> & I<sub>0-</sub> (typical)

ton & toff (typical)

Topology


V<sub>OUT</sub>

#### Features

- Gate drive supply range from 6 V to 20 V
- CMOS Schmitt-triggered inputs
- 3.3V and 5V logic compatible
- Two independent gate drivers
- Matched propagation delay for both channels
- Outputs in phase with inputs
- Leadfree, RoHS compliant

#### **Typical Applications**

- General Purpose Dual Low Side Driver
- DC-DC converters

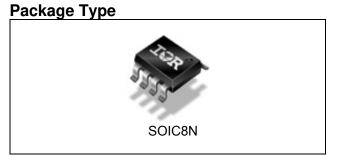

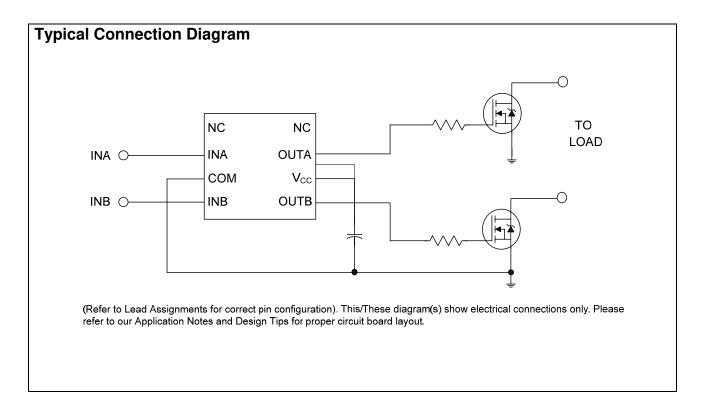


Table of Contents	Page
Typical connection diagram	1
Description	3
Qualification Information	4
Absolute Maximum Ratings	5
Recommended Operating Conditions	5
Static Electrical Characteristics	6
Dynamic Electrical Characteristics	7
Functional Block Diagram	8
Input/Output Pin Equivalent Circuit Diagram	10
Lead Definitions	11
Lead Assignments	11
Application Information and Additional Details	12
Package Details: SOIC8	14
Package Details: SOIC8, Tape and Reel	15
Part Marking Information	16
Ordering Information	17



#### Description

The IRS4426/IRS4427/IRS4428 are low voltage, high speed power MOSFET and IGBT drivers. Proprietary latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL output. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays between two channels are matched.

#### **Qualification Information<sup>†</sup>**

		Industrial <sup>††</sup>		
		Comments: This family of ICs has passed JEDEC's		
		Industrial qualification. IR's Consumer qualification level is		
		granted by extension of the higher Industrial level.		
Majatura Canaitivity L		MSL2 <sup>†††</sup> 260°C		
Moisture Sensitivity Level		(per IPC/JEDEC J-STD-020)		
	Machine Model	Class B		
ESD		(per JEDEC standard JESD22-A115)		
ESD	Human Body Model	Class 3A		
	Human Bouy Model	(per EIA/JEDEC standard EIA/JESD22-A114)		
IC Latch-Up Test		Class I, Level A		
		(per JESD78)		
RoHS Compliant		Yes		

† Qualification standards can be found at International Rectifier's web site http://www.irf.com/

++ Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information.

+++ Higher MSL ratings may be available for the specific package types listed here. Please contact your International Rectifier sales representative for further information.



# International

#### **Absolute Maximum Ratings**

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min	Max	Units		
V <sub>cc</sub>	Fixed supply voltage	-0.3	25			
Vo	Output voltage	-0.3	V <sub>CC</sub> + 0.3	+ 0.3 V		
V <sub>IN</sub>	Logic input voltage	-0.3	V <sub>CC</sub> + 0.3			
PD	Package power dissipation @ TA $\leq$ 25°C	_	0.625	W		
<b>R</b> th <sub>JA</sub>	Thermal resistance, junction to ambient	—	— 200 °C/W			
TJ	Junction temperature	— 150				
Ts	Storage temperature	-55	150 °C			
ΤL	Lead temperature (soldering, 10 seconds)		300			

#### **Recommended Operating Conditions**

For proper operation, the device should be used within the recommended conditions. All voltage parameters are absolute voltages referenced to COM unless otherwise stated in the table. The offset rating is tested with supply of  $V_{CC}$  = 15V.

Symbol	Definition	Min	Max	Units
V <sub>cc</sub>	Fixed supply voltage	6	20	
Vo	Output voltage	0	V <sub>CC</sub>	V
V <sub>IN</sub>	Logic input voltage	0	V <sub>CC</sub>	
T <sub>A</sub>	Ambient temperature	-40	125	°C

#### **Static Electrical Characteristics**

 $V_{CC}$  = 15V,  $T_A$  = 25°C unless otherwise specified. The  $V_{IN}$  and  $I_{IN}$  parameters are referenced to COM and are applicable to input leads: INA and INB. The  $V_O$  and  $I_O$  parameters are referenced to COM and are applicable to the output leads: OUTA and OUTB.

Symbol	Definition	Min	Тур	Max	Units	Test Conditions
V <sub>IH</sub>	Logic "0" input voltage (OUTA = LO, OUTB = LO) (IRS4426) Logic "1" input voltage (OUTA=HI,OUTB=HI) (IRS4427) Logic "0" input voltage (OUTA=LO), Logic "1" input voltage (OUTB=HI) (IRS4428)	2.5	_	_	V	
V <sub>IL</sub>	Logic "1" input voltage (OUTA = HI, OUTB = HI) (IRS4426) Logic "0" input voltage (OUTA=LO,OUTB=LO) (IRS4427) Logic "1" input voltage (OUTA=HI), Logic "0" input voltage (OUTB=LO) (IRS4428)	_	_	0.8	V	
V <sub>OH</sub>	High level output voltage, V <sub>BIAS</sub> -V <sub>O</sub>			1.4		I <sub>0</sub> = 0 mA
V <sub>OL</sub>	Low level output voltage, Vo	_		0.15		l <sub>o</sub> = 20 mA
I <sub>IN+</sub>	Logic "1" input bias current	_	5	15		$V_{IN} = 0V (IRS4426)$ $V_{IN} = 5V (IRS4427)$ $V_{INA} = 0V (IRS4428)$ $V_{INB} = 5V (IRS4428)$
I <sub>IN-</sub>	Logic "0" input bias current	-30	-10	_	μA	$V_{IN} = 5V (IRS4426)$ $V_{IN} = 0V (IRS4427)$ $V_{INA} = 5V (IRS4428)$ $V_{INB} = 0V (IRS4428)$
I <sub>QCC</sub>	Quiescent V <sub>CC</sub> supply current	_	100	200		$V_{IN} = 0V \text{ or } 5V$
I <sub>O+</sub>	Output high short circuit pulsed current	_	2.3			$V_{O} = 0V, V_{IN} = COM \\ (IRS4426) \\ V_{O} = 0V, V_{IN} = 5V \\ (IRS4427) \\ V_{O} = 0V, V_{INA} = COM \\ (IRS4428) \\ V_{O} = 0V, V_{INB} = 5V \\ (IRS4428) \\ \end{cases}$
I <sub>O-</sub>	Output low short circuit pulsed current		3.3		Α -	$V_{O} = 15V, V_{IN} = 5V$ (IRS4426) $V_{O} = 15V, V_{IN} = COM$ (IRS4427) $V_{O} = 15V, V_{INA} = 5V$ (IRS4428) $V_{O} = 15V, V_{INB} = COM$ (IRS4428)

www.irf.com

International **tor** Rectifier


**Dynamic Electrical Characteristics**  $V_{CC}$  = 15V,  $T_A$  = 25°C, and  $C_L$  = 1000pF unless otherwise specified.


Symbol	Definition	Min	Тур	Max	Units	Test Conditions	
t <sub>on</sub>	Turn-on propagation delay	—	50	95			
t <sub>off</sub>	Turn-off propagation delay	_	50	95			
tr	Turn-on rise time	_	25	55	ns	Figure 2	
t <sub>f</sub>	Turn-off fall time	_	25	55			

## International **IOR** Rectifier

# IRS4426/IRS4427/IRS4428


### **Functional Block Diagram**

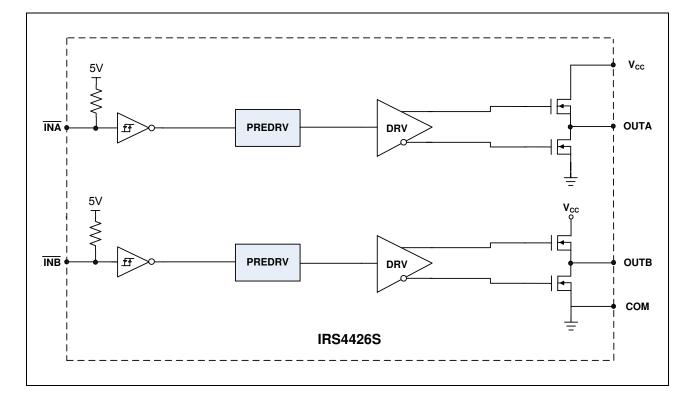

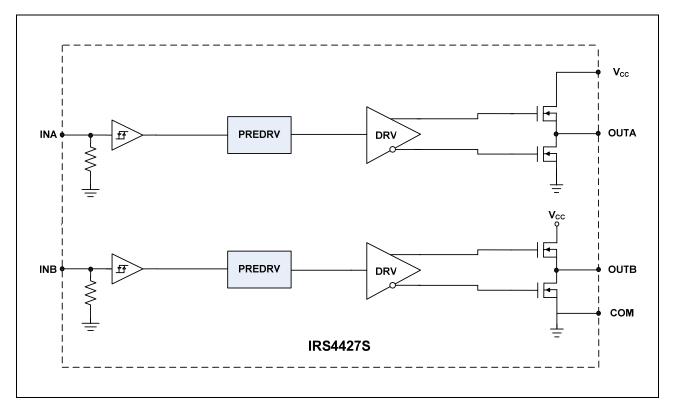

# International **IOR** Rectifier

# IRS4426/IRS4427/IRS4428

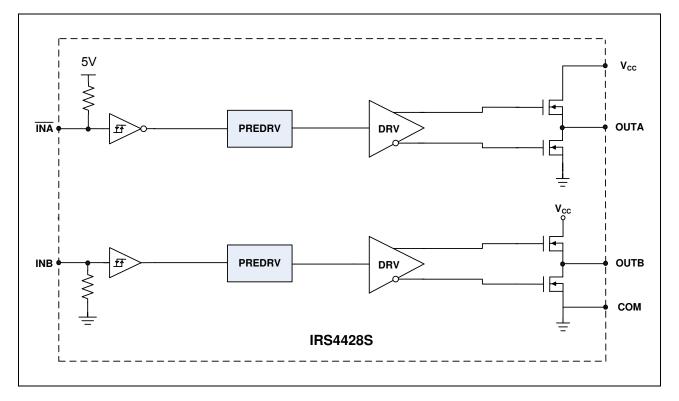


#### Vcc 🛱 5V ESD ESD R<sub>PU</sub> Diode Diode INA INB ~~~ 25V $\mathbf{R}_{\mathsf{ESD}}$ ESD ESD Diode Diode сом [ COM **IRS4426** IRS4426 / IRS4427 / IRS4428 Vcc 📮 Vcc 5V ESD ESD Diode R<sub>PU</sub> Diode ξ INA INB **W** ĪNĀ ~~ R<sub>ESD</sub> R<sub>ESD</sub> ESD $\mathbf{R}_{PD}$ ESD Diode Diode сом 🗖 сом IRS4427 **IRS4428** ESD Diode INB W $R_{ESD}$ ESD ξ $\mathbf{R}_{PD}$ Diode сом 🗖 **IRS4428**

#### Input/Output Pin Equivalent Circuit Diagrams

#### **Lead Definitions**

PIN	Symbol	Description				
1	NC	No connection				
2	INA	Logic input for gate driver output (OUTA), out of phase (IRS4426, IRS4428), in phase (IRS4427)				
3	GND	Ground				
4	INB	Logic input for gate driver output (OUTB), out of phase (IRS4426), in phase (IRS4427, IRS4428)				
5	OUTB	Gate drive output B				
6	V <sub>cc</sub>	Supply voltage				
7	OUTA	Gate drive output A				
8	NC	No connection				

#### Lead Assignments

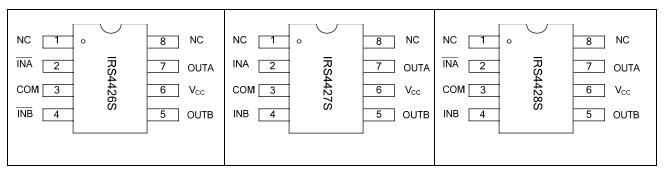



#### **Application Information and Additional Details**


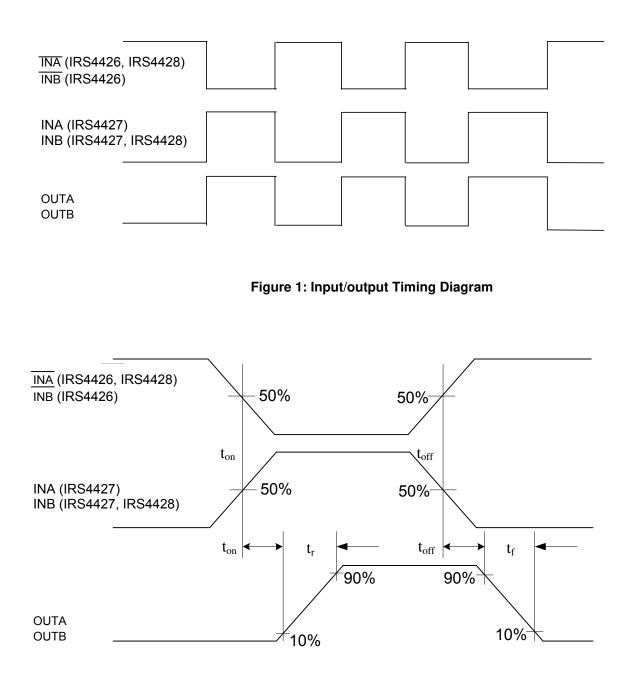


Figure 2: Switching Time Waveform Definitions

**尗** 0.1 μF

OUTA

OUTB

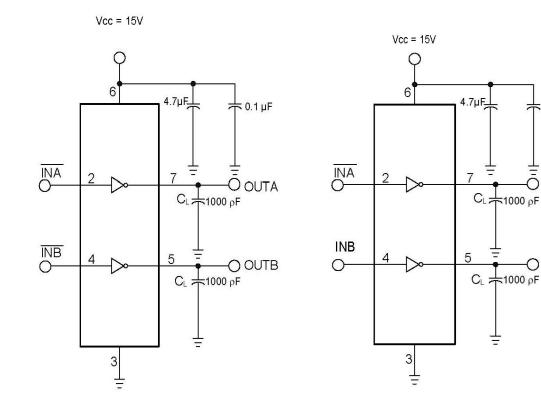



IRS4427

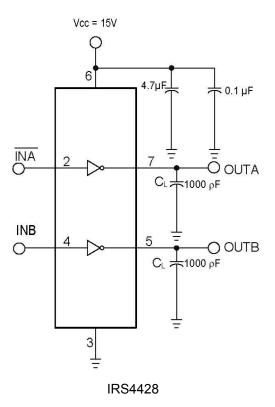



Figure 3: Switching Time Test Circuit

International **tor** Rectifier


## International **IOR** Rectifier

# IRS4426/IRS4427/IRS4428

### Package Details, SOIC8N

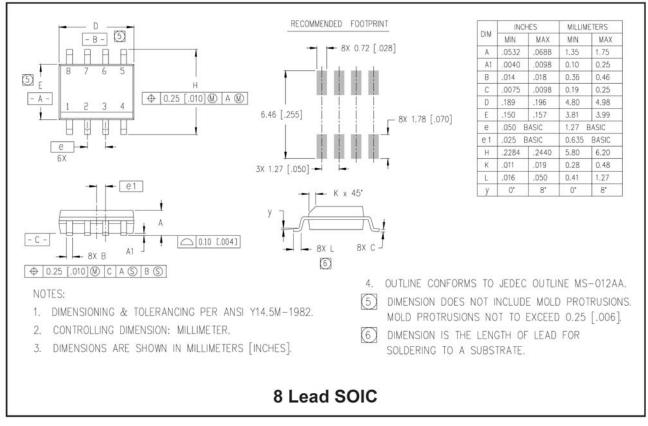


### Package details: SOIC8N, Tape and Reel

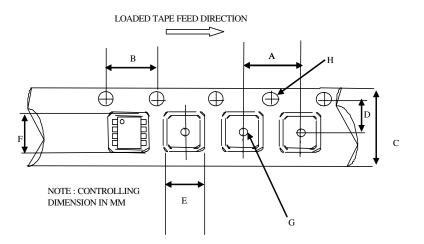

#### CARRIER TAPE DIMENSION FOR 8SOICN

	Me	etric	Imperial		
Code	Min	Max	Min	Max	
A	7.90	8.10	0.311	0.318	
В	3.90	4.10	0.153	0.161	
С	11.70	12.30	0.46	0.484	
D	5.45	5.55	0.214	0.218	
E	6.30	6.50	0.248	0.255	
F	5.10	5.30	0.200	0.208	
G	1.50	n/a	0.059	n/a	
Н	1.50	1.60	0.059	0.062	

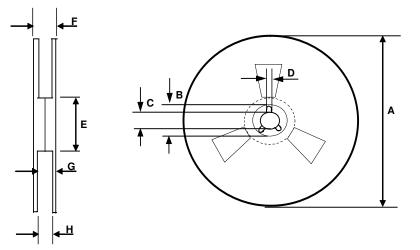


#### REEL DIMENSIONS FOR 8SOICN

	Me	etric	Imperial		
Code	Min	Max	Min	Max	
A	329.60	330.25	12.976	13.001	
В	20.95	21.45	0.824	0.844	
С	12.80	13.20	0.503	0.519	
D	1.95	2.45	0.767	0.096	
E	98.00	102.00	3.858	4.015	
F	n/a	18.40	n/a	0.724	
G	14.50	17.10	0.570	0.673	
Н	12.40	14.40	0.488	0.566	



#### **Part Marking Information**

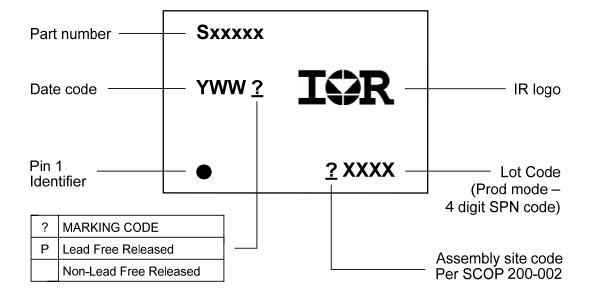

#### Ordering Information

Deer Deet New Ison	De che en Tress	Standard F	Pack	O multile Deal Namel an	
Base Part Number	Package Type	Form	Quantity	Complete Part Number	
10044000	SOIC8N	Tube/Bulk	95	IRS4426SPBF	
IRS4426S		Tape and Reel	2500	IRS4426STRPBF	
	SOIC8N	Tube/Bluk	95	IRS4427SPBF	
IRS4427S		Tape and Reel	2500	IRS4427STRPBF	
IRS4428S	SOIC8N	Tube/Bulk	95	IRS4428SPBF	
		Tape and Reel	2500	IRS4428STRPBF	

The information provided in this document is believed to be accurate and reliable. However, International Rectifier assumes no responsibility for the consequences of the use of this information. International Rectifier assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of International Rectifier. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

For technical support, please contact IR's Technical Assistance Center http://www.irf.com/technical-info/

> WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105