

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



#### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Ė

### General Specifications

#### **Electrical Capacity (Resistive Load)**

Low/Logic Level: 50mA @ 24V DC maximum for Standard Operating Force models

125mA @ 24V DC maximum for High Operating Force models

#### **Other Ratings**

#### **Standard Operating Force High Operating Force**

**Contact Resistance:** 50 milliohms maximum 50 milliohms maximum 500 megohms minimum @ 250V DC 500 megohms minimum @ 250V DC **Insulation Resistance:** 

Dielectric Strength: 250V AC minimum for 1 minute minimum 250V AC minimum for 1 minute minimum

Mechanical Life: 5,000,000 operations minimum 1,000,000 operations minimum 5,000,000 operations minimum 1,000,000 operations minimum **Electrical Life: Nominal Operating Force:** 1.76N for JB15L 2.65N for JB15HL & JB15HB

> **Total Travel:** .010" (.254mm) .012" (.300mm)

#### **Materials & Finishes**

Polyacetal for Short; Glass fiber reinforced PBT for Extended **Actuator:** 

Glass fiber reinforced polyamide (UL94V-0) Case:

Nitrile butadiene rubber Seal:

Glass fiber reinforced PBT (UL94V-0) Base:

**Movable Contacts:** Stainless steel

**Stationary Contacts:** Brass with silver plating

Brass with silver plating Terminals:

#### **Environmental Data**

-25°C through +70°C (-13°F through +158°F) **Operating Temperature Range:** 

> **Humidity:** 90 ~ 95% humidity for 240 hours @ 40°C (104°F)

Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning

in 1 minute; 3 right angled directions for 2 hours

Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

#### **PCB Processing**

Wave Soldering recommended. See Profile A in Supplement section. Soldering:

Manual Soldering: See Profile A in Supplement section.

Automated cleaning. See Cleaning specifications in Supplement section. Cleaning:

#### **Standards & Certifications**

Flammability Standards: UL94V-0 rated case & base

> The JB Series tactiles have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit.

When used as intended in a logic-level circuit, the results do not produce hazardous energy.

# Supplement | Accessories

### Distinctive Characteristics

Choice of dimensions from PCB to top of cap adds to design flexibility.

Bright, full-face illumination with red, green, or yellow LEDs for attractive, functional panel layouts.

Higher operating force type provides more pronounced operating feel.


Dome contact gives crisp tactile feedback to positively indicate circuit transfer and assures high reliability and long life of up to 5,000,000 operations.

Rubber seal construction prevents contact contamination and allows automated soldering and cleaning.

Slanted terminals provide a spring type action which ensures secure mounting and prevents dislodging during wave soldering.

Molded-in terminals are part of the sealed construction which allows automated soldering and cleaning.

Terminal spacing conforms to standard .100" (2.54mm) PCB grid.

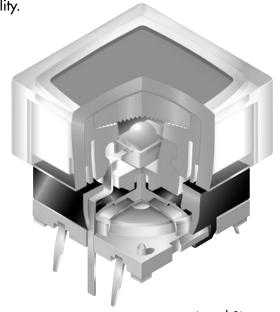


Actual Size



#### Common Bus Matrix


These single pole, single throw switches can be used in a keyboard matrix and, using strapped terminals, achieve a common bus electrical configuration on a single-sided PC board.



| PC Terminations |   |  |   |   |   |   |   |            |   |   |    |    |    |    |
|-----------------|---|--|---|---|---|---|---|------------|---|---|----|----|----|----|
|                 |   |  | 2 | 3 | 4 | 5 | 6 | 7          | 8 | 9 | 10 | 11 | 12 | 13 |
|                 | 1 |  |   |   |   |   |   |            |   |   |    |    |    |    |
|                 | 2 |  |   |   |   |   |   |            |   | 0 |    |    |    |    |
| S               | 3 |  |   |   |   |   |   |            |   |   |    |    |    | 0  |
| he              | 4 |  |   |   |   |   |   |            |   |   |    |    |    |    |
| v               | 5 |  |   |   |   |   |   |            |   |   |    |    |    |    |
| Switches        | 6 |  |   |   |   |   |   |            |   |   |    |    |    |    |
| Ś               | 7 |  |   |   |   |   |   |            |   |   |    |    |    |    |
|                 | 8 |  |   |   |   |   |   |            |   |   |    |    |    |    |
| Keys            | 9 |  |   |   |   |   |   |            |   |   |    |    |    |    |
|                 | 0 |  |   |   |   |   |   | $\bigcirc$ |   |   |    |    |    |    |
|                 | Α |  |   |   |   |   |   |            |   |   |    |    |    |    |
|                 | В |  |   |   |   |   |   |            |   |   |    |    |    |    |
| O = ON          |   |  |   |   |   |   |   |            |   |   |    |    |    |    |
|                 |   |  |   |   |   |   |   |            |   |   |    |    |    |    |

#### X-Y Matrix

These single pole, single throw switches can be arranged on a single-sided PC board matrix with strapped terminals to achieve an X-Y type electrical interconnection.



| PC Terminations   |   |   |   |   |            |   |   |                |
|---|---|---|---|---|------------|---|---|----------------|
|   |   | 1 | 2 | 3 | 4          | 5 | 6 | 7              |
|   | 1 | 0 |   |   |            | 0 |   |                |
|   | 2 | 0 |   |   |            |   |   |                |
| S   | 3 |   |   |   |            |   |   |                |
| ) e   | 4 |   |   |   |            | 0 |   |                |
| Switches  | 5 |   |   |   |            |   |   |                |
| -:-<br>-:-  | 6 |   |   |   |            |   |   |                |
| S   | 7 |   |   |   |            | 0 |   |                |
|   | 8 |   |   |   |            |   |   |                |
| <eys< td=""><td>9</td><td></td><td></td><td>0</td><td></td><td></td><td></td><td></td></eys<> | 9 |   |   | 0 |            |   |   |                |
| ×   | 0 |   |   |   | $\bigcirc$ |   |   | $\overline{C}$ |
|   | Α |   |   |   |            | 0 |   | $\overline{C}$ |
|   | В |   |   |   |            |   |   | $\overline{C}$ |
| O = ON  |   |   |   |   |            |   |   |                |


Black = Switch Circuit Red = PCB Trace



Slides

Touch

#### TYPICAL SWITCH ORDERING EXAMPLE

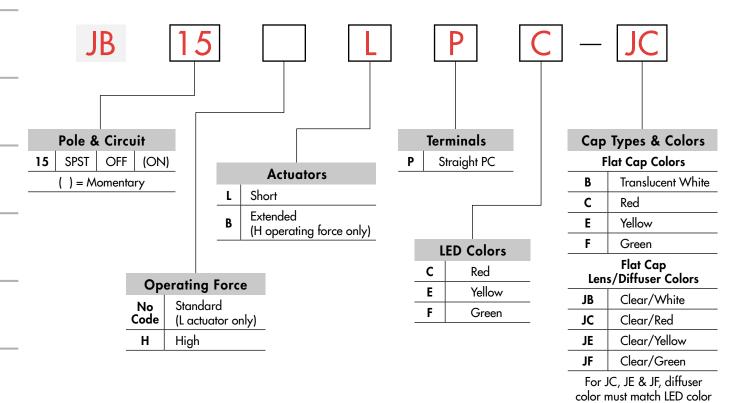

#### **DESCRIPTION FOR TYPICAL ORDERING EXAMPLE**

JB15LPC-JC



#### Framed Cap **Button/Frame Colors**

| BB | White/White  |  |  |  |  |
|----|--------------|--|--|--|--|
| ВС | White/Red    |  |  |  |  |
| BE | White/Yellow |  |  |  |  |
| BF | White/Green  |  |  |  |  |
| ВН | White/Gray   |  |  |  |  |

|                 | POLE & CIRCUIT |                                   |      |                             |                |  |  |  |  |  |
|-----------------|----------------|-----------------------------------|------|-----------------------------|----------------|--|--|--|--|--|
|                 |                | Actuator Position ( ) = Momentary |      | Switch Throw<br>& Schematic | LED Schematic  |  |  |  |  |  |
| Pole &<br>Throw | Model          | Normal                            | Down | SPST 3                      |                | Notes: Terminal numbers<br>are shown on switch.<br>LED circuit is isolated<br>& requires external<br>power source. |  |  |  |  |
| SPST            | JB15           | OFF                               | (ON) | 24                          | (+)O (>) O (-) |  |  |  |  |  |

#### **OPERATING FORCE**



#### **Standard Nominal Operating Force**

1.76N

Available with short actuator only (code L)



#### High **Nominal Operating Force**


2.65N


Available with both short and extended actuators


#### **ACTUATORS**



#### **Short Actuator**









Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4060).




#### **Extended Actuator**



High operating force only




Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4076).



#### **TERMINALS**



#### **Straight PC Terminals**



Further details in Typical Switch Dimensions

#### **LED COLORS & SPECIFICATIONS**

LEDs are supplied as an integral part of illuminated devices and are not available separately.

LED polarity markings are on the bottom of the switch.

age, a ballast resistor is required.

The electrical specifications shown here are determined at a basic temperature of 25°C. If the source voltage exceeds the rated volt-

The resistor value can be calculated by using the formula in the Supplement section.

|                                   |                 | C         | E      | F     |  |
|-----------------------------------|-----------------|-----------|--------|-------|--|
| Color                             |                 | Red       | Yellow | Green |  |
| Forward Peak Current              | I <sub>FM</sub> | 25mA      | 25mA   | 25mA  |  |
| Typical Forward Current           | I <sub>F</sub>  | 20mA      | 20mA   | 20mA  |  |
| Forward Voltage                   | V <sub>F</sub>  | 2.0V      | 2.2V   | 2.1V  |  |
| Reverse Peak Voltage              | $V_{RM}$        | 4V        | 4V     | 4V    |  |
| Current Reduction Rate Above 25°C |                 | 0.42mA/°C |        |       |  |
| Ambient Temperature Range         | −25°C ~ +70°C   |           |        |       |  |

Slides

# Supplement | Accessories

#### **SNAP-ON CAPS**

#### AT4135 Flat

Cap Color Codes:




**Translucent White** 



Yellow



Green




Material: Polycarbonate

Finish: Frosted

#### AT4060 Flat

Lens/Diffuser Color Codes:

JE



Red


Transparent Clear Lens

Translucent White or Colored Diffuser

White Frame

Framed: AT4076 Button with Frame

Translucent Button/Frame Color Codes:



BB

White/White

White/Red


BE

White/Yellow

White/Green

BH

White/Gray



Material: Polycarbonate

Clear/Red

Clear/Yellow

Clear/Green

Clear/Translucent White


Lens Finish: Glossy


Material: Polycarbonate Button Finish: Frosted


#### TYPICAL SWITCH DIMENSIONS


#### Flat Snap-on Cap













JB15LPC-JC


Spring action terminals conform to .100" (2.54mm) PCB spacing


#### Framed Snap-on Cap











JB15HBPC-BC

Spring action terminals conform to .100" (2.54mm) PCB spacing



#### **LEGENDS**

NKK Switches can provide custom legends for caps. Contact factory for more information.

#### Suggested Printable Area for Cap, Lens, or Button

#### **Recommended Methods:**

Laser Etch, Screen Print or Pad Print

Laser Etch or Pad Print


Epoxy based ink is recommended.







Epoxy based ink is recommended.











Shaded areas are printable areas.

#### Suggested Printable Area for Film Insert





Shaded area is printable area.

Film Insert: Clear Polyester 7 mil maximum thickness