

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Bussmann^{*}

JKS - 600Vac, 1-60A, Fast-Acting Fuses



Description: Advanced protection Class J curent-limiting, fast-acting fuses.

Catalog Symbol: JKS-(amp)

Ratings:

Volts - 600Vac

Amps - 1-60A

IR - 200kA Vac RMS Sym.

Agency Information:

CE, UL Listed, Std. 248-8, Class J, Guide JDDZ, File E4273 CSA Certified, C22.2 No. 248.8, Class 1422-02, File 53787


Catalog Numbers (amps)


JKS-1	JKS-8	JKS-30	
JKS-2	JKS-10	JKS-35	
JKS-3	JKS-12	JKS-40	
JKS-4	JKS-15	JKS-45	
JKS-5	JKS-20	JKS-50	
JKS-6	JKS-25	JKS-60	

Carton Quantity:

Amp Rating	Carton Qty.	
1–60	10	

Dimensions - in





Features:

- Provides 10X better current limitation to help prevent equipment damage caused by short-circuit events.
- 200kA Interrupting rating complies with NEC® Section 110.9 for today's large capacity systems.
- Fast-acting fuse helps prevent equipment damage caused by short-circuit events.
- Ideal for critical industrial or commercial applications that have specific current limitation requirements.

Recommended Fuse Blocks and Holders

Fuse Amps	1-Pole	2-Pole	3-Pole	
Open Blocks				
0-30	J60030-1_	J60030-2_	J60030-3_	
35-60	J60060-1_	J60060-2_	J60060-3_	
"Pyramid" Blocks				
0-30	_	_	JP60030-3_	
CH Series Holders				
0-30	CH30J1_	CH30J2_	CH30J3_	
35-60	CH60J1_	CH60J2_	CH60J3_	
Safety J™ Holders				
0-30	JT60030_	_	_	
35-60	JT60060_	_	_	

For additional information on the Class J fuse blocks and holders, see data sheets # 1114 (open blocks), #1108 (pyramid blocks), # 2144 (CH Series) and # 1152 (Safety J).


Fuse Reducers For Class J Fuses

Equipment	Desired Fuse	Catalog Numbers
Fuse Clips	(Case) Size	(Pairs)
60A	30A	J-63
100A	30A	J-13
	60A	J-16
200A	60A	J-26 [†]

[†] Not for bolt-in applications.

JKS - 600Vac, 1-60A, Fast-Acting Fuses


Time-Current Curves - Average Melt

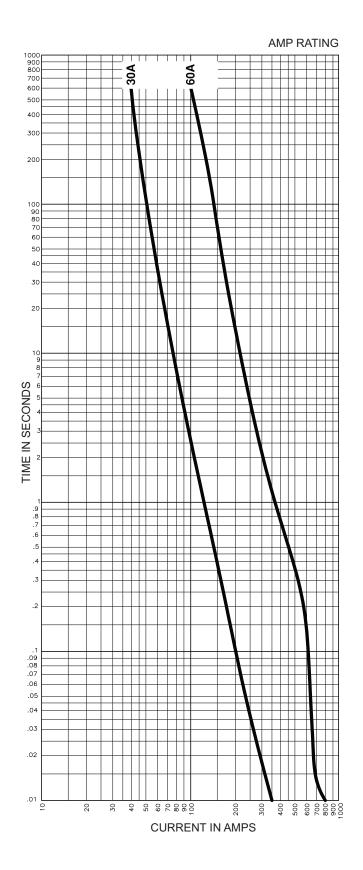



JKS - 600Vac, 1-60A, Fast-Acting Fuses

Current-Limitation Curves

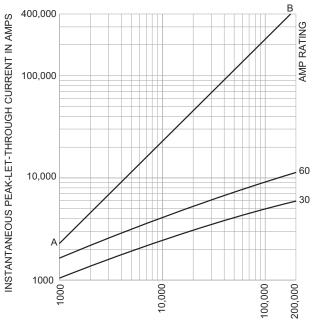

RMS SYMMETRICAL CURRENT IN AMPS
A-B = ASYMMETRICAL AVAILABLE PEAK (2.3 X SYM RMS AMPS)

Current-Limiting Effects

Prosp.	Let-Through Current		
S.C.C.	(Apparent RMS Symmetrical Vs. Fuse Rating)		
_	30A	60A	
5000	1000	1000	
10,000	1000	2000	
15,000	1000	2000	
20,000	1000	2000	
25,000	2000	3000	
30,000	2000	3000	
35,000	2000	3000	
40,000	2000	3000	
50,000	2000	3000	
60,000	2000	3000	
70,000	2000	3000	
80,000	2000	3000	
90,000	2000	4000	
100,000	2000	4000	
150,000	2000	5000	
200,000	3000	5000	

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.