



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





KSZ8895MLUB

Integrated 5-Port 10/100 Managed Switch

Revision 2.1

General Description

The KSZ8895MLUB is a highly-integrated Layer 2-managed 5-port switch with an optimized design and plentiful features, qualified to meet AEC-Q100 standard for automotive applications. It is designed for cost-sensitive 10/100Mbps 5-port switch systems with on-chip termination, lowest power consumption and internal core power controller. These features will save more system cost. It has 1.4Gbps high-performance memory bandwidth, shared memory based switch fabric with full non-blocking configuration. It also provides an extensive feature set such as power management, programmable rate limit and priority ratio, tag/port-based VLAN, packets filtering, quality-of-service (QoS) four-queue prioritization, management interface, and MIB counters. Port 5 is a MAC 5 MII interface with PHY mode as default at switch side. The SW5-MII interface can be connected to a processor with a MAC MII interface.


The KSZ8895MLUB consists of 10/100 PHYs with patented and enhanced mixed-signal technology, media access control (MAC) units, a high-speed non-blocking switch fabric, a dedicated address lookup engine, and an on-chip frame buffer memory. The KSZ8895MLUB contains five MACs and four integrated PHYs. All PHYs support 10/100Base-T/TX.

All registers of MACs and PHYs units can be managed by the SPI interface or the SMI interface. MIIM registers of the PHYs can be accessed through the MDC/MDIO interface. EEPROM can set all control registers for the unmanaged mode.

The KSZ8895MLUB provides multiple CPU control/data interfaces to effectively address both current and emerging fast Ethernet applications.

Datasheets and support documentation are available on Micrel's web site at: www.micrel.com.

Functional Diagram

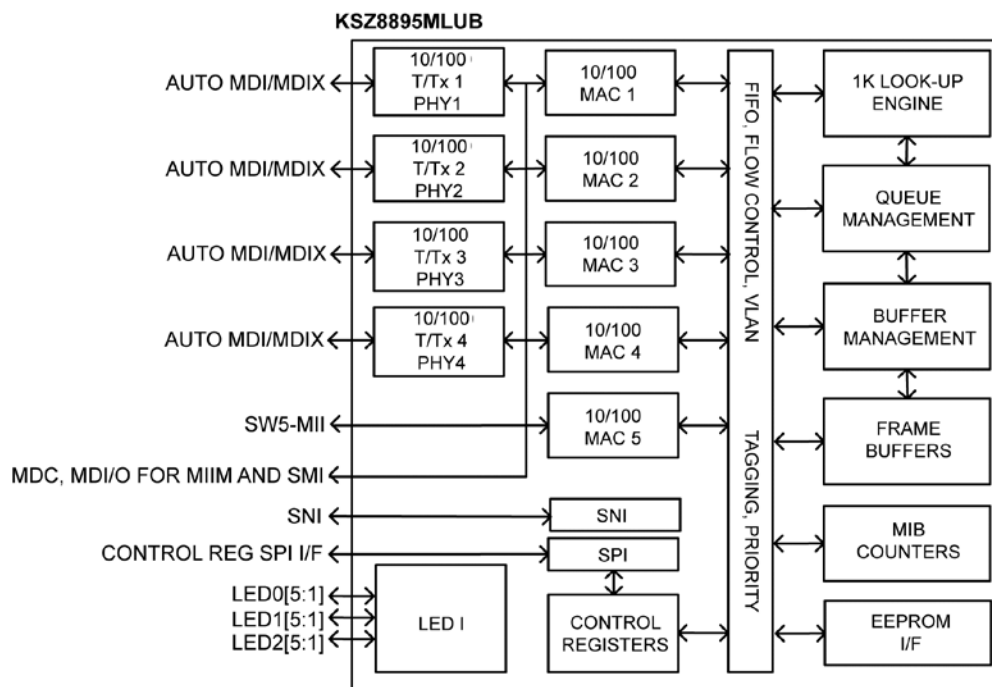

Features

Advanced Switch Features

- IEEE 802.1q VLAN support for up to 128 VLAN groups (full-range 4096 of VLAN IDs).
- Static MAC table supports up to 32 entries.
- VLAN ID tag/untag options, per port basis.
- IEEE 802.1p/q tag insertion or removal on a per port basis based on ingress port (egress).
- Programmable rate limiting at the ingress and egress on a per port basis.
- Jitter-free per packet based rate-limiting support.
- Broadcast storm protection with percentage control (global and per port basis).
- IEEE 802.1d rapid spanning tree protocol RSTP support.
- Tail tag mode (1byte added before FCS) support at Port 5 to inform the processor which ingress port receives the packet.
- 1.4Gbps high-performance memory bandwidth and shared memory-based switch fabric with fully non-blocking configuration.
- MII with MAC 5 on Port 5, SW5-MII for MAC 5 MII interface.
- Enable/Disable option for huge frame size up to 2000 bytes per frame.
- IGMP v1/v2 snooping (Ipv4) support for multicast packet filtering.
- IPv4/IPv6 QoS support.
- Support unknown unicast/multicast address and unknown VID packet filtering.
- Self-address filtering.

Comprehensive Configuration Register Access

- Serial management interface (MDC/MDIO) to all PHYs registers and SMI interface (MDC/MDIO) to all registers.
- High-speed SPI (up to 25MHz) and I²C master Interface to all internal registers.
- I/O pins strapping and EEPROM to program selective registers in unmanaged switch mode.
- Control registers configurable on the fly (port-priority, 802.1p/d/q, AN...).

QoS/CoS Packet Prioritization Support

- Per port, 802.1p and DiffServ-based.
- 1/2/4-queue QoS prioritization selection.
- Programmable weighted fair queuing for ratio control.
- Re-mapping of 802.1p priority field per port basis.

Integrated 5-Port 10/100 Ethernet Switch

- New generation switch with five MACs and five PHYs fully compliant with IEEE 802.3u standard.
- Non-blocking switch fabric assures fast packet delivery by utilizing a 1K MAC address lookup table and a store-and-forward architecture.
- On-chip 64Kbyte memory for frame buffering (not shared with 1K unicast address table).
- Full duplex IEEE 802.3x flow control (PAUSE) with force mode option.
- Half-duplex back pressure flow control.
- HP Auto MDI/MDI-X and IEEE Auto crossover support.
- Port 5 MAC5 SW5-MII interface supports PHY mode and MAC mode.
- 7-wire serial network interface (SNI) support for legacy MAC.
- Per port LED Indicators for link, activity, and 10/100 speed.
- Register port status support for link, activity, full/half duplex and 10/100 speed.
- Micrel LinkMD® cable diagnostic capabilities for determining cable opens, shorts, and length.
- On-chip terminations and internal biasing technology for cost down and lowest power consumption.

Switch Monitoring Features

- Port mirroring/monitoring/sniffing: ingress and/or egress traffic to any port or MII.
- MIB counters for fully-compliant statistics gathering 34 MIB counters per port.
- Loop-back support for MAC, PHY, and remote diagnostic of failure.
- Interrupt for the link change on any ports.

Low Power Dissipation

- Full-chip hardware power-down.
- Full-chip software power-down/per port software power down.
- Energy-detect mode support < 100mW full-chip power consumption when all ports have no activity.
- Very-low, full-chip power consumption (<0.5W), without extra power consumption on transformers.
- Dynamic clock-tree shutdown feature.
- Voltages: Single 3.3V supply with 3.3V VDDIO and Internal 1.2V LDO controller enabled or external 1.2V LDO solution:
 - Analog VDDAT 3.3V only
 - VDDIO support 3.3V, 2.5V and 1.8V
 - Low 1.2V core power
- Industrial Temperature Range: -40°C to +85°C.
- Available in 128-pin LQFP, lead-free package.

Applications

- In-vehicle diagnostics (OBD)
- High-speed software download
- Gateway switch
- Head unit
- Rear seat entertainment

Ordering Information

Part Number	Temperature Range	Package	Lead Finish/Grade
KSZ8895MLUB (Automotive Grade)	–40°C to +85°C	128-Pin LQFP	Pb-Free/Automotive
KSZ8895MLUB-EVAL Board	Evaluation Board for KSZ8895MLUB		

Revision History

Revision	Date	Summary of Changes
1.0	03/16/11	Initial
1.1	09/27/11	Update some descriptions, updates for descriptions of SMI mode and IGMP mode, update register default values, pins type and some parameters. Revision 1.1 datasheet reflects the revision A4 silicon (0.13um CMOS technology).
2.0	02/21/14	Updates timing data for MII PHY mode. Update descriptions for VLAN table and I2C master mode. Update the descriptions for the pins 125 and 126. Update the equation in the broadcast storm protection section. Update the operation rating to +/-5% and TTL min/max I/O voltage in different VDDIO. Change I/O from TTL to CMOS. Update SPI description from 127 to 255 for all registers. Update the table of tail tag rules. Update description for Register 1 bits [7:4]. Update table 8 from bit [57:55] to bit [58:56]. Update the port register control 2 bit [6] description bits [20:16] change to bits [11:7]. Add evaluation Board in the ordering information table. Revision 2.0 datasheet reflects the revision B2 silicon (0.11um CMOS technology). From B2 silicon, add LinkMD feature and ESD to be improved to 5KV.
2.1	03/31/14	The part number is changed from KSZ8895MLU to KSZ8895MLUB. Remove port 5 in the pin configuration and pin description. Update notes description for pin 125 and pin 126 in the pins descriptions. Update operating rating and electrical characteristics, correct typos.

Contents

List of Figures.....	13
List of Tables	14
Pin Configuration	15
Pin Description	16
Pin for Strap-In Options.....	22
Introduction	25
Physical Layer Transceiver.....	25
100BASE-TX Transmit	25
10BASE-T Transmit.....	25
10BASE-T Receive	26
MDI/MDI-X Auto Crossover	26
Auto-Negotiation	27
LinkMD [®] Cable Diagnostics	29
On-Chip Termination Resistors	30
Internal 1.2V LDO Controller	30
Power Management	31
Normal Operation Mode	31
Energy Detect Mode	31
Soft Power-Down Mode.....	32
Power-Saving Mode.....	32
Port-Based Power-Down Mode	32
Switch Core.....	32
Address Look-Up	32
Learning	32
Migration	32
Aging.....	32
Forwarding	33
Switching Engine	33
Media Access Controller (MAC) Operation	33
MII Interface Operation	36
Port 5 MAC 5 SW5-MII Interface	36
SNI Interface Operation	37

Advanced Functionality	39
QoS Priority Support	39
Port-Based Priority	39
802.1p-Based Priority	39
Spanning Tree Support	40
Rapid Spanning Tree Support	41
Tail Tagging Mode	41
IGMP Support	42
Port Mirroring Support	43
VLAN Support	43
Rate Limiting Support	44
Ingress Rate Limit	44
Egress Rate Limit	44
Transmit Queue Ratio Programming	45
Filtering for Self-Address, Unknown Unicast/Multicast Address and Unknown VID Packet/IP Multicast	45
Configuration Interfaces	46
I ² C Master Serial Bus Configuration	46
SPI Slave Serial Bus Configuration	46
MII Management Interface (MIIM)	49
Serial Management Interface (SMI)	49
Register Description	51
Global Registers	53
Register 0 (0x00): Chip ID0	53
Register 1 (0x01): Chip ID1 / Start Switch	53
Register 2 (0x02): Global Control 0	53
Register 2 (0x02): Global Control 0	54
Register 3 (0x03): Global Control 1	54
Register 3 (0x03): Global Control 1	55
Register 4 (0x04): Global Control 2	56
Register 4 (0x04): Global Control 2	57
Register 5 (0x05): Global Control 3	57
Register 6 (0x06): Global Control 4	58
Register 7 (0x07): Global Control 5	59
Register 8 (0x08): Global Control 6	59
Register 9 (0x09): Global Control 7	59
Register 10 (0x0A): Global Control 8	59

Register 11 (0x0B): Global Control 9	59
Register 11 (0x0B): Global Control 9	60
<i>Register 12 (0x0C): Global Control 10</i>	<i>61</i>
Register 13 (0x0D): Global Control 11	61
Register 14 (0x0E): Power-Down Management Control 1	62
Register 14 (0x0E): Power-Down Management Control 1	62
Register 15 (0x0F): Power-Down Management Control 2	62
Port Registers.....	63
Register 16 (0x10): Port 1 Control 0	63
Register 32 (0x20): Port 2 Control 0	63
Register 48 (0x30): Port 3 Control 0	63
Register 64 (0x40): Port 4 Control 0	63
Register 80 (0x50): Port 5 Control 0	63
Register 16 (0x10): Port 1 Control 0	64
Register 32 (0x20): Port 2 Control 0	64
Register 48 (0x30): Port 3 Control 0	64
Register 64 (0x40): Port 4 Control 0	64
Register 80 (0x50): Port 5 Control 0	64
Register 17 (0x11): Port 1 Control 1	64
Register 33 (0x21): Port 2 Control 1	64
Register 49 (0x31): Port 3 Control 1	64
Register 65 (0x41): Port 4 Control 1	64
Register 81 (0x51): Port 4 Control 1	64
Register 18 (0x12): Port 1 Control 2	65
Register 34 (0x22): Port 2 Control 2	65
Register 50 (0x32): Port 3 Control 2	65
Register 66 (0x42): Port 4 Control 2	65
Register 82 (0x52): Port 5 Control 2	65
Register 18 (0x12): Port 1 Control 2	66
Register 34 (0x22): Port 2 Control 2	66
Register 50 (0x32): Port 3 Control 2	66
Register 66 (0x42): Port 4 Control 2	66
Register 82 (0x52): Port 5 Control 2	66
Register 19 (0x13): Port 1 Control 3	67
Register 35 (0x23): Port 2 Control 3	67
Register 51 (0x33): Port 3 Control 3	67

Register 67 (0x43): Port 4 Control 3.....	67
Register 83 (0x53): Port 5 Control 3.....	67
Register 20 (0x14): Port 1 Control 4.....	67
Register 36 (0x24): Port 2 Control 4.....	67
Register 52 (0x34): Port 3 Control 4.....	67
Register 68 (0x44): Port 4 Control 4.....	67
Register 84 (0x54): Port 5 Control 4.....	67
Register 87 (0x57): Reserved Control Register	67
Register 25 (0x19): Port 1 Status 0	68
Register 41 (0x29): Port 2 Status 0	68
Register 57 (0x39): Port 3 Status 0	68
Register 73 (0x49): Port 4 Status 0	68
Register 89 (0x59): Reserved.....	68
Register 26 (0x1A): Port 1 PHY Special Control/Status.....	68
Register 42 (0x2A): Port 2 PHY Special Control/Status.....	68
Register 58 (0x3A): Port 3 PHY Special Control/Status.....	68
Register 74 (0x4A): Port 4 PHY Special Control/Status.....	68
Register 90 (0x5A): Reserved	68
Register 27 (0x1B): Port 1 LinkMD Result	69
Register 43 (0x2B): Port 2 LinkMD Result	69
Register 59 (0x3B): Port 3 LinkMD Result	69
Register 75 (0x4B): Port 4 LinkMD Result	69
Register 91 (0x5B): Reserved	69
Register 28 (0x1C): Port 1 Control 5	69
Register 44 (0x2C): Port 2 Control 5	69
Register 60 (0x3C): Port 3 Control 5	69
Register 76 (0x4C): Port 4 Control 5	69
Register 92 (0x5C): Reserved	69
Register 28 (0x1C): Port 1 Control 5	70
Register 44 (0x2C): Port 2 Control 5	70
Register 60 (0x3C): Port 3 Control 5	70
Register 76 (0x4C): Port 4 Control 5	70
Register 92 (0x5C): Reserved	70
Register 29 (0x1D): Port 1 Control 6	70
Register 45 (0x2D): Port 2 Control 6	70
Register 61 (0x3D): Port 3 Control 6	70

Register 77 (0x4D): Port 4 Control 6	70
Register 93 (0x5D): Reserved	70
Register 29 (0x1D): Port 1 Control 6	71
Register 45 (0x2D): Port 2 Control 6	71
Register 61 (0x3D): Port 3 Control 6	71
Register 77 (0x4D): Port 4 Control 6	71
Register 93 (0x5D): Reserved	71
Register 30 (0x1E): Port 1 Status 1	71
Register 46 (0x2E): Port 2 Status 1	71
Register 62 (0x3E): Port 3 Status 1	71
Register 78 (0x4E): Port 4 Status 1	71
Register 94 (0x5E): Reserved	71
Register 31 (0x1F): Port 1 Control 7 and Status 2	72
Register 47 (0x2F): Port 2 Control 7 and Status 2	72
Register 63 (0x3F): Port 3 Control 7 and Status 2	72
Register 79 (0x4F): Port 4 Control 7 and Status 2	72
Register 95 (0x5F): Reserved	72
Advanced Control Registers.....	73
Register 104 (0x68): MAC Address Register 0	73
Register 105 (0x69): MAC Address Register 1	73
Register 106 (0x6A): MAC Address Register 2	73
Register 107 (0x6B): MAC Address Register 3	73
Register 108 (0x6C): MAC Address Register 4	73
Register 109 (0x6D): MAC Address Register 5	73
Register 110 (0x6E): Indirect Access Control 0	74
Register 111 (0x6F): Indirect Access Control 1	74
Register 112 (0x70): Indirect Data Register 8	74
Register 113 (0x71): Indirect Data Register 7	74
Register 114 (0x72): Indirect Data Register 6	74
Register 115 (0x73): Indirect Data Register 5	74
Register 116 (0x74): Indirect Data Register 4	74
Register 117 (0x75): Indirect Data Register 3	75
Register 118 (0x76): Indirect Data Register 2	75
Register 119 (0x77): Indirect Data Register 1	75
Register 120 (0x78): Indirect Data Register 0	75
Register 124 (0x7C): Interrupt Status Register	75

Register 125 (0x7D): Interrupt Mask Register	76
Register 128 (0x80): Global Control 12	76
Register 129 (0x81): Global Control 13	76
Register 130 (0x82): Global Control 14	77
Register 131 (0x83): Global Control 15	77
Register 132 (0x84): Global Control 16	78
Register 133(0x85): Global Control 17	78
Register 134 (0x86): Global Control 18	79
Register 135 (0x87): Global Control 19	79
Register 144 (0x90): TOS Priority Control Register 0	80
Register 145 (0x91): TOS Priority Control Register 1	80
Register 146 (0x92): TOS Priority Control Register 2	80
Register 147 (0x93): TOS Priority Control Register 3	80
<i>Register 148 (0x94): TOS Priority Control Register 4</i>	<i>81</i>
Register 149 (0x95): TOS Priority Control Register 5	81
Register 150 (0x96): TOS Priority Control Register 6	81
Register 151 (0x97): TOS Priority Control Register 7	81
Register 152 (0x98): TOS Priority Control Register 8	81
Register 153 (0x99): TOS Priority Control Register 9	82
Register 154 (0x9A): TOS Priority Control Register 10	82
Register 155 (0x9B): TOS Priority Control Register 11	82
Register 156 (0x9C): TOS Priority Control Register 12	82
Register 157 (0x9D): TOS Priority Control Register 13	82
Register 158 (0x9E): TOS Priority Control Register 14	83
Register 159 (0x9F): TOS Priority Control Register 15	83
Register 176 (0xB0): Port 1 Control 8	83
Register 192 (0xC0): Port 2 Control 8	83
Register 208 (0xD0): Port 3 Control 8	83
Register 224 (0xE0): Port 4 Control 8	83
Register 240 (0xF0): Port 5 Control 8	83
Register 176 (0xB0): Port 1 Control 8	84
Register 192 (0xC0): Port 2 Control 8	84
Register 208 (0xD0): Port 3 Control 8	84
Register 224 (0xE0): Port 4 Control 8	84
Register 240 (0xF0): Port 5 Control 8	84
Register 177 (0xB1): Port 1 Control 9	84
Register 193 (0xC1): Port 2 Control 9	84

Register 209 (0xD1): Port 3 Control 9	84
Register 225 (0xE1): Port 4 Control 9.....	84
Register 241 (0xF1): Port 5 Control 9.....	84
Register 178 (0xB2): Port 1 Control 10	85
Register 194 (0xC2): Port 2 Control 10	85
Register 210 (0xD2): Port 3 Control 10	85
Register 226 (0xE2): Port 4 Control 10	85
Register 242 (0xF2): Port 5 Control 10.....	85
Register 179 (0xB3): Port 1 Control 11	85
Register 195 (0xC3): Port 2 Control 11	85
Register 211 (0xD3): Port 3 Control 11	85
Register 227 (0xE3): Port 4 Control 11	85
Register 243 (0xF3): Port 5 Control 11.....	85
Register 180 (0xB4): Port 1 Control 12	85
Register 196 (0xC4): Port 2 Control 12	85
Register 212 (0xD4): Port 3 Control 12	85
Register 228 (0xE4): Port 4 Control 12	85
Register 244 (0xF4): Port 5 Control 12.....	85
Register 181 (0xB5): Port 1 Control 13	86
Register 197 (0xC5): Port 2 Control 13	86
Register 213 (0xD5): Port 3 Control 13	86
Register 229 (0xE5): Port 4 Control 13	86
Register 245 (0xF5): Port 5 Control 13.....	86
Register 182 (0xB6): Port 1 Rate Limit Control	86
Register 198 (0xC6): Port 2 Rate Limit Control	86
Register 214 (0xD6): Port 3 Rate Limit Control	86
Register 230 (0xE6): Port 4 Rate Limit Control	86
Register 246 (0xF6): Port 5 Rate Limit Control	86
Register 183 (0xB7): Port 1 Priority 0 Ingress Limit Control 1	87
Register 199 (0xC7): Port 2 Priority 0 Ingress Limit Control 1	87
Register 215 (0xD7): Port 3 Priority 0 Ingress Limit Control 1	87
Register 231 (0xE7): Port 4 Priority 0 Ingress Limit Control 1	87
Register 247 (0xF7): Port 5 Priority 0 Ingress Limit Control 1	87
Register 184 (0xB8): Port 1 Priority 1 Ingress Limit Control 2.....	87
Register 200 (0xC8): Port 2 Priority 1 Ingress Limit Control 2.....	87
Register 216 (0xD8): Port 3 Priority 1 Ingress Limit Control 2.....	87
Register 232 (0xE8): Port 4 Priority 1 Ingress Limit Control 2.....	87

Register 248 (0xF8): Port 5 Priority 1 Ingress Limit Control 2	87
Register 185 (0xB9): Port 1 Priority 2 Ingress Limit Control 3	87
Register 201 (0xC9): Port 2 Priority 2 Ingress Limit Control 3	87
Register 217 (0xD9): Port 3 Priority 2 Ingress Limit Control 3	87
Register 233 (0xE9): Port 4 Priority 2 Ingress Limit Control 3	87
Register 249 (0xF9): Port 5 Priority 2 Ingress Limit Control 3	87
Register 186 (0xBA): Port 1 Priority 3 Ingress Limit Control 4	88
Register 202 (0xCA): Port 2 Priority 3 Ingress Limit Control 4	88
Register 218 (0xDA): Port 3 Priority 3 Ingress Limit Control 4	88
Register 234 (0xEA): Port 4 Priority 3 Ingress Limit Control 4	88
Register 250 (0xFA): Port 5 Priority 3 Ingress Limit Control 4	88
Register 187 (0xBB): Port 1 Queue 0 Egress Limit Control 1	88
Register 203 (0xCB): Port 2 Queue 0 Egress Limit Control 1	88
Register 219 (0xDB): Port 3 Queue 0 Egress Limit Control 1	88
Register 235 (0xEB): Port 4 Queue 0 Egress Limit Control 1	88
Register 251 (0xFB): Port 5 Queue 0 Egress Limit Control 1	88
Register 188 (0xBC): Port 1 Queue 1 Egress Limit Control 2	88
Register 204 (0xCC): Port 2 Queue 1 Egress Limit Control 2	88
Register 220 (0xDC): Port 3 Queue 1 Egress Limit Control 2	88
Register 236 (0xEC): Port 4 Queue 1 Egress Limit Control 2	88
Register 252 (0xFC): Port 5 Queue 1 Egress Limit Control 2	88
Register 189 (0xBD): Port 1 Queue 2 Egress Limit Control 3	89
Register 205 (0xCD): Port 2 Queue 2 Egress Limit Control 3	89
Register 221 (0xDD): Port 3 Queue 2 Egress Limit Control 3	89
Register 237 (0xED): Port 4 Queue 2 Egress Limit Control 3	89
Register 253 (0xFD): Port 5 Queue 2 Egress Limit Control 3	89
Register 190 (0xBE): Port 1 Queue 3 Egress Limit Control 4	89
Register 206 (0xCE): Port 2 Queue 3 Egress Limit Control 4	89
Register 222 (0xDE): Port 3 Queue 3 Egress Limit Control 4	89
Register 238 (0xEE): Port 4 Queue 3 Egress Limit Control 4	89
Register 254 (0xFE): Port 5 Queue 3 Egress Limit Control 4	89
Register 191(0xBF): Testing Register	91
Register 207(0xCF): Reserved Control Register	91
Register 223(0xDF): Test Register 2	91
Register 239(0xEF): Test Register 3	91
Register 255(0xFF): Testing Register4	91

Static MAC Address Table	92
VLAN Table	94
Dynamic MAC Address Table	96
Management Information Base (MIB) Counters.....	98
Port 1 MIB Counter Indirect Memory Offsets.....	98
Format of “Per port” MIB Counter	99
MIIM Registers	102
Register 0h: MII Control.....	102
Register 1h: MII Status	103
Register 2h: PHYID HIGH	103
Register 3h: PHYID LOW	103
Register 4h: Advertisement Ability.....	104
Register 5h: Link Partner Ability	104
Register 1dh: LinkMD Control/Status	105
Register 1fh: PHY Special Control/Status	105
Absolute Maximum Ratings.....	107
Operating Ratings	107
Electrical Characteristics	107
Timing Diagrams	109
EEPROM Timing.....	109
SNI Timing	110
SPI Timing	113
Auto-Negotiation Timing	115
Reset Timing.....	116
Reset Circuit Diagram.....	117
Isolation Transformer Selection	118
Reference Crystal Selection.....	118
Package Information.....	119


List of Figures

Figure 1. Typical Straight Cable Connection	26
Figure 2. Typical Crossover Cable Connection	27
Figure 3. Auto-Negotiation	28
Figure 4. Destination Address Lookup Flow Chart (Stage 1)	34
Figure 5. Destination Address Resolution Flow Chart (Stage 2)	35
Figure 6. 802.1p Priority Field Format	39
Figure 7. Tail Tag Frame Format	41
Figure 8. KSZ8895MLUB EEPROM Configuration Timing Diagram	46
Figure 9. SPI Write Data Cycle	47
Figure 10. SPI Read Data Cycle	47
Figure 11. SPI Multiple Write	48
Figure 12. SPI Multiple Read	48
Figure 13. EEPROM Interface Input Receive Timing Diagram.....	109
Figure 14. EEPROM Interface Output Transmit Timing Diagram.....	109
Figure 15. SNI Input Timing	110
Figure 16. SNI Output Timing	110
Figure 17. MAC Mode MII Timing – Data Received from MII	111
Figure 18. MAC Mode MII Timing – Data Transmitted from MII	111
Figure 19. PHY Mode MII Timing – Data Received from MII.....	112
Figure 20. PHY Mode MII Timing – Data Transmitted from MII.....	112
Figure 21. SPI Input Timing	113
Figure 22. SPI Output Timing.....	114
Figure 23. Auto-Negotiation Timing	115
Figure 24. Reset Timing	116
Figure 25. Recommended Reset Circuit.....	117
Figure 26. Recommended Circuit for Interfacing with CPU/FPGA Reset.....	117

List of Tables

Table 1. MDI/MDI-X Pin Definitions	26
Table 2. Internal Function Block Status	31
Table 3. Switch MAC 5 MII Signals.....	37
Table 4. SNI Signals	38
Table 5. Tail Tag Rules	42
Table 6. FID+DA Look-Up in the VLAN Mode	43
Table 7. FID+SA Look-Up in the VLAN Mode	44
Table 8. SPI Connections	47
Table 9. MII Management Interface Frame Format	49
Table 10. Serial Management Interface (SMI) Frame Format.....	49
Table 11. Data Rate Selection in 100BT.....	90
Table 12. Data Rate Selection in 10BT.....	90
Table 13. Format of Static MAC Table for Read (32 Entries)	92
Table 14. Format of Static MAC Table for Writes (32 Entries)	93
Table 15. Format of Static VLAN Table (Support Max 4096 VLAN ID Entries and 128 Active VLANs).....	94
Table 16. VLAN ID and Indirect Registers	95
Table 17. Format of Dynamic MAC Address Table (1K Entries)	96
Table 18. All Port Dropped Packet MIB Counters.....	99
Table 19. Format of All Dropped Packet MIB Counters.....	100
Table 20. EEPROM Timing Parameters	109
Table 21. SNI Timing Parameters.....	110
Table 22. MAC Mode MII Timing Parameters.....	111
Table 23. PHY Mode MII Timing Parameters	112
Table 24. SPI Input Timing Parameters.....	113
Table 25. SPI Output Timing Parameters	114
Table 26. Auto-Negotiation Timing Parameters.....	115
Table 27. Reset Timing Parameters	116
Table 28. Transformer Selection Criteria	118
Table 29. Qualified Magnetic Vendors	118
Table 30. Typical Reference Crystal Characteristics	118

Pin Configuration

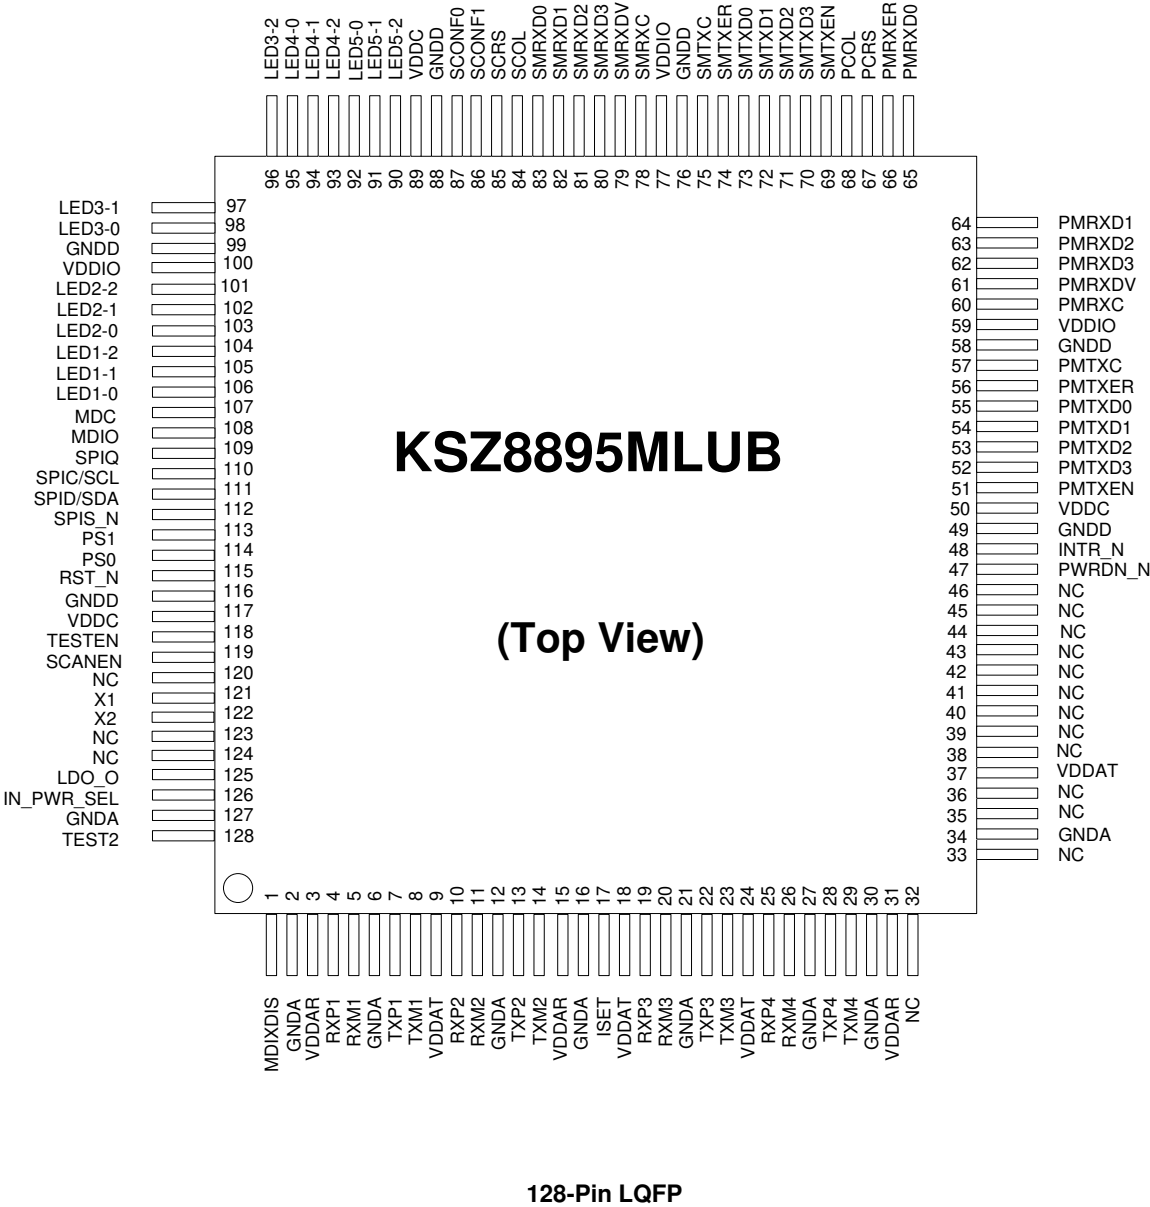

Pin Description

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾
1	MDI-XDIS	lpd	1 – 5	Disable auto MDI/MDI-X. PD (default) = normal operation. PU = disable auto MDI/MDI-X on all ports.
2	GNDA	GND		Analog ground.
3	VDDAR	P		1.2V analog V _{DD} .
4	RXP1	I	1	Physical receive signal + (differential).
5	RXM1	I	1	Physical receive signal – (differential).
6	GNDA	GND		Analog ground.
7	TXP1	O	1	Physical transmit signal + (differential).
8	TXM1	O	1	Physical transmit signal – (differential).
9	VDDAT	P		3.3V analog V _{DD} .
10	RXP2	I	2	Physical receive signal + (differential).
11	RXM2	I	2	Physical receive signal – (differential).
12	GNDA	GND		Analog ground.
13	TXP2	O	2	Physical transmit signal + (differential).
14	TXM2	O	2	Physical transmit signal – (differential).
15	VDDAR	P		1.2V analog V _{DD} .
16	GNDA	GND		Analog ground.
17	ISET			Set physical transmit output current. Pull-down with a 12.4kΩ1% resistor.
18	VDDAT	P		3.3V analog V _{DD} .
19	RXP3	I	3	Physical receive signal + (differential).
20	RXM3	I	3	Physical receive signal - (differential).
21	GNDA	GND		Analog ground.
22	TXP3	O	3	Physical transmit signal + (differential).
23	TXM3	O	3	Physical transmit signal – (differential).
24	VDDAT	P		3.3V analog V _{DD} .
25	RXP4	I	4	Physical receive signal + (differential).
26	RXM4	I	4	Physical receive signal - (differential).
27	GNDA	GND		Analog ground.
28	TXP4	O	4	Physical transmit signal + (differential).
29	TXM4	O	4	Physical transmit signal – (differential).
30	GNDA	GND		Analog ground.
31	VDDAR	P		1.2V analog V _{DD} .
32	NC	NC		No connect.
33	NC	NC		No connect.
34	GNDA	GND		Analog ground.
35	NC	NC		No connect.
36	NC	NC		No connect.
37	VDDAT	P		3.3V analog V _{DD} .

Pin Description (Continued)

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾
38	NC	NC		No connect.
39	NC	NC		No connect.
40	NC	NC		No connect.
41	NC	NC		No connect.
42	NC	NC		No connect.
43	NC	NC		No connect.
44	NC	NC		No connect.
45	NC	NC		No connect.
46	NC	NC		No connect.
47	PWRDN_N	lpu		Full-chip power down. Active low.
48	INTR_N	Opu		Interrupt. This pin is Open-Drain output pin.
49	GNDD	GND		Digital ground.
50	VDDC	P		1.2V digital core V _{DD} .
51	PMTXEN	lpd	5	Reserved for MLUB. No connect.
52	PMTXD3	lpd	5	Reserved for MLUB. No connect.
53	PMTXD2	lpd	5	Reserved for MLUB. No connect.
54	PMTXD1	lpd	5	Reserved for MLUB. No connect.
55	PMTXD0	lpd	5	Reserved for MLUB. No connect.
56	PMTXER	lpd	5	Reserved for MLUB. No connect.
57	PMTXC	I/O	5	Reserved for MLUB. No connect.
58	GNDD	GND		Digital ground.
59	VDDIO	P		3.3V, 2.5V or 1.8V digital V _{DD} for digital I/O circuitry.
60	PMRXC	I/O	5	Reserved for MLUB. No connect.
61	PMRXDV	lpd/O	5	Reserved for MLUB. No connect.
62	PMRXD3	lpd/O	5	Reserved for MLUB. Strap option: PD (default) = enable flow control. PU = disable flow control.
63	PMRXD2	lpd/O	5	Reserved for MLUB. Strap option: PD (default) = disable back pressure. PU = enable back pressure.
64	PMRXD1	lpd/O	5	Reserved for MLUB. Strap option: PD (default) = drop excessive collision packets. PU = does not drop excessive collision packets.
65	PMRXD0	lpd/O	5	Reserved for MLUB. Strap option: PD (default) = disable aggressive back-off algorithm in half-duplex mode. PU = enable for performance enhancement.
66	PMRXER	lpd/O	5	Reserved for MLUB. Strap option: PD (default) = 1522/1518 bytes; PU = packet size up to 1536 bytes.

Pin Description (Continued)

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾		
67	PCRS	lpd/O	5	Reserved for MLUB. Strap option for port 4 only. PD (default) = force half-duplex if auto-negotiation is disabled or fails. PU = force full-duplex if auto negotiation is disabled or fails. Refer to Register 76.		
68	PCOL	lpd/O	5	Reserved for MLUB. Strap option for port 4 only. PD (default) = no force flow control, normal operation. PU = force flow control. Refer to Register 66.		
69	SMTXEN	lpd		Port 5 Switch MII transmit enable.		
70	SMTXD3	lpd		Port 5 Switch MII transmit bit 3.		
71	SMTXD2	lpd		Port 5 Switch MII transmit bit 2.		
72	SMTXD1	lpd		Port 5 Switch MII transmit bit 1.		
73	SMTXD0	lpd		Port 5 Switch MII transmit bit 0.		
74	SMTXER	lpd		Port 5 Switch MII transmit error.		
75	SMTXC	I/O		Port 5 Switch MII transmit clock: Input: SW5-MII MAC mode. Output: SW5-MII PHY modes.		
76	GNDD	GND		Digital ground.		
77	VDDIO	P		3.3V, 2.5V or 1.8V digital V _{DD} for digital I/O circuitry.		
78	SMRXC	I/O		Port 5 Switch MII receive clock: Input: SW5-MII MAC mode. Output: SW5-MII PHY mode.		
79	SMRXDV	lpd/O		Switch MII receive data valid.		
80	SMRXD3	lpd/O		Port 5 Switch MII receive bit 3. Strap option: PD (default) = Disable Switch SW5-MII full-duplex flow control PU = Enable Switch SW5-MII full-duplex flow control.		
81	SMRXD2	lpd/O		Port 5 Switch MII receive bit 2. Strap option: PD (default) = Switch SW5-MII in full-duplex mode; PU = Switch SW5-MII in half-duplex mode.		
82	SMRXD1	lpd/O		Port 5 Switch MII receive bit 1. Strap option: PD (default) =Port 5 Switch SW5-MII in 100Mbps mode; SW5-TMII in 200Mbps mode. PU = Switch SW5-MII in 10Mbps mode.		
83	SMRXD0	lpd/O		Port 5 Switch MII receive bit 0. Strap option: LED mode PD (default) = mode 0; PU = mode 1. See “Register 11.” Mode 0, link at 100/Full LEDx[2,1,0]=0,0,0 100/Half LEDx[2,1,0]=0,1,0 10/Full LEDx[2,1,0]=0,0,1 10/Half LEDx[2,1,0]=0,1,1 Mode 1, link at 100/Full LEDx[2,1,0]=0,1,0 100/Half LEDx[2,1,0]=0,1,1 10/Full LEDx[2,1,0]=1,0,0 10/Half LEDx[2,1,0]=1,0,1		
					Mode 0	Mode 1
				LEDX_2	Lnk/Act	100Lnk/Act
				LEDX_1	Full/Col	10Lnk/Act
				LEDX_0	Speed	Full duplex
84	SCOL	lpd/O		Port 5 Switch MII collision detect: Input: SW5-MII MAC modes. Output: SW5-MII PHY modes.		

Pin Description (Continued)

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾	
85	SCRS	lpd/O		Port 5 Switch MII modes carrier sense: Input: SW5-MII MAC modes. Output: SW5-MII PHY modes.	
86	SCONF1	lpd		Pin 91,86,87 are dual MII configuration pins for the Port5 MAC5 MII. SW5-MII supports both MAC mode and PHY modes.	
				Pin#: (91, 86, 87)	Port5 Switch MAC5 SW5- MII
				000	Disable, Otri
				001	PHY Mode MII
				010	MAC Mode MII
				011	PHY Mode SNI
				100	Disable (Default)
				101	PHY Mode MII
				110	MAC Mode MII
				111	PHY Mode SNI
87	SCONF0	lpd		Dual MII configuration pin. See pin 86 descriptions.	
88	GNDD	GND		Digital ground.	
89	VDDC	P		1.2V digital core V _{DD} .	
90	LED5-2	lpu/O	5	Reserved for MLUB Strap option: aging setup. See “Aging” section. PU (default) = Aging enable PD = Aging disable.	
91	LED5-1	lpu/O	5	Reserved for MLUB Strap option: PU (default): enable PHY[5] MII I/F. PD: tristate and disable all PHY[5] MII output. (Design should pull this pin down as default for MLUB.	
92	LED5-0	lpu/O	5	Reserved for MLUB Strap option for port 4 only. PU (default) = Enable auto-negotiation. PD = Disable auto-negotiation. Strap to register76 bit[7].	
93	LED4-2	lpu/O	4	LED indicator 2.	
94	LED4-1	lpu/O	4	LED indicator 1.	
95	LED4-0	lpu/O	4	LED indicator 0. Strap option: PU (default) = Normal mode. PD = Energy Detection mode (EDPD mode). Strap to register 14 bits[4:3]	
96	LED3-2	lpu/O	3	LED indicator 2.	
97	LED3-1	lpu/O	3	LED indicator 1.	
98	LED3-0	lpu/O	3	LED indicator 0. Strap option: PU (default) = Select I/O drive strength (8mA); PD = Select I/O drive strength (12mA). Strap to register132 bit[7-6].	
99	GNDD	GND		Digital ground.	
100	VDDIO	P		3.3V, 2.5V or 1.8V digital V _{DD} for digital I/O circuitry.	
101	LED2-2	lpu/O	2	LED indicator 2.	

Pin Description (Continued)

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾	
102	LED2-1	Ipu/O	2	LED indicator 1. Strap option: for port 3 only. PU (default) = Enable auto-negotiation. PD = Disable auto-negotiation. Strap to register60 bit[7].	
103	LED2-0	Ipu/O	2	LED indicator 0.	
104	LED1-2	Ipu/O	1	LED indicator 2.	
105	LED1-1	Ipu/O	1	LED indicator 1. Strap option: for port 3 only. PU (default) = no force flow control, normal operation. PD = force flow control. Strap to register60 bit[4].	
106	LED1-0	Ipu/O	1	LED indicator 0. Strap option for port 3 only. PU (default) = force half-duplex if auto-negotiation is disabled or fails. PD = force full-duplex if auto negotiation is disabled or fails. Strap to register60 bit[5].	
107	MDC	Ipu	All	Switch MII management data clock. Or SMI interface clock.	
108	MDIO	Ipu/O	All	Switch MII management data I/O. Or SMI interface data I/O. Features internal pull down to define pin state when not driven. Need an external pull-up when driven.	
109	SPIQ	Ipu/O	All	SPI serial data output in SPI slave mode.	
110	SPIC/SCL	Ipu/O	All	SPI slave mode: clock input (1) Input clock up to 25MHz in SPI slave mode, (2) output clock at 61kHz in I ² C master mode. See “Pin 113.”	
111	SSPID/SDA	Ipu/O	All	SPI slave mode: serial data input. (1) Serial data input in SPI slave mode; (2) Serial data input/output in I ² C master mode. See “Pin 113.”	
112	SPIS_N	Ipu	All	SPI slave mode: chip select (active low). (1) SPI data transfer start in SPI slave mode. When SPIS_N is high, the KSZ8895MLUB is deselected and SPIQ is held in high impedance state, a high-to-low transition to initiate the SPI data transfer. (2) not used in I ² C master mode.	
113	PS1	Ipd		Serial bus configuration pin. For this case, if the EEPROM is not present, the KSZ8895MLUB will start itself with the PS[1.0] = 00 default register values.	
				Pin Configuration	Serial Bus Configuration
				PS[1.0]=00	I ² C Master Mode for EEPROM
				PS[1.0]=01	SMI Interface Mode
				PS[1.0]=10	SPI Slave Mode for CPU Interface
				PS[1.0]=11	Factory Test Mode (BIST)
114	PS0	Ipd		Serial bus configuration pin. See “Pin 113.”	
115	RST_N	Ipu		Reset the KSZ8895MLUB device. Active low.	
116	GNDD	GND		Digital ground.	
117	VDDC	P		1.2V digital core V _{DD} .	
118	TESTEN	Ipd		NC for normal operation. Factory test pin.	
119	SCANEN	Ipd		NC for normal operation. Factory test pin.	
120	NC	NC		No connect.	

Pin Description (Continued)

Pin Number	Pin Name	Type ⁽¹⁾	Port	Pin Function ⁽²⁾
121	X1	I		25MHz crystal clock connection/or 3.3V Oscillator input. Crystal/Oscillator should be ± 50 ppm tolerance.
122	X2	O		25MHz crystal clock connection.
123	NC	NC		No connect.
124	NC	NC		No connect.
125	LDO_O	P		LDO_O pin connect to Gate pin of MOSFET if using the internal 1.2V LDO controller. LDO_O pin will be floating if using an external 1.2V LDO. Note: When pin126 voltage is greater than the internal 1.2V LDO controller enable threshold (1V), the Internal 1.2V LDO controller is enabled and creates a 1.2V output when using an external MOSFET. When pin126 is pull-down, the internal 1.2V LDO controller is disabled and pin 125 tri-stated.
126	IN_PWR_SEL	I		Pull-up or a Resistor divider: Enable internal 1.2V LDO controller. Pull-down: Disable internal 1.2V LDO controller. Note: A 4K pull-up and a 2K pull-down resistors divider network is recommended if using the internal 1.2V LDO controller and an external MOSFET for 1.2V power. A 100 Ω (approximately) resistor between the source and drain pins on the MOSFET is highly recommended as well. You can also use an external 1.2V LDO for 1.2V power supply.
127	GNDA	GND		Analog ground.
128	TEST2	NC		NC for normal operation. Factory test pin.

Notes:

- P = Power supply.
I = Input.
O = Output.
I/O = Bidirectional.
GND = Ground.
Ipu = Input w/internal pull-up.
Ipd = Input w/internal pull-down.
Ipd/O = Input w/internal pull-down during reset, output pin otherwise.
Ipu/O = Input w/internal pull-up during reset, output pin otherwise.
NC = No connect.
- PU = Strap pin pull-up.
PD = Strap pull-down.
OTRI = Output tristated.

Pin for Strap-In Options

The KSZ8895MLUB can function as a managed switch or unmanaged switch. If no EEPROM or micro-controller exists, the KSZ8895MLUB will operate from its default setting. The strap-in option pins can be configured by external pull-up/down resistors and take the effect after power-down reset or warm reset, the functions are described in the following tables.

Pin Number	Pin Name	PU/PD ⁽¹⁾	Description ⁽²⁾
1	MDI-XDIS	lpd	Disable auto MDI/MDI-X. PD = (default) = normal operation PU = disable auto MDI/MDI-X on all ports.
62	PMRXD3	lpd/O	Strap option: PD (default) = enable flow control; PU = disable flow control.
63	PMRXD2	lpd/O	Strap option: PD (default) = disable back pressure; PU = enable back pressure.
64	PMRXD1	lpd/O	Strap option: PD (default) = drop excessive collision packets; PU = does not drop excessive collision packets.
65	PMRXD0	lpd/O	Strap option: PD (default) = disable aggressive back-off algorithm in half-duplex mode; PU = enable for performance enhancement.
66	PMRXER	lpd/O	Strap option: PD (default) = 1522/1518 bytes; PU = packet size up to 1536 bytes.
67	PCRS	lpd/O	Strap option for port 4 only. PD (default) = force half-duplex if auto-negotiation is disabled or fails. PU = force full-duplex if auto-negotiation is disabled or fails. Refer to register 76.
68	PCOL	lpd/O	Strap option for port 4 only. PD (default) = no force flow control. PU = force flow control. Refer to register 66.
80	SMRXD3	lpd/O	Switch MII receive bit 3. Strap option: PD (default) = disable switch SW5-MII full-duplex flow control; PU = enable switch SW5-MII full-duplex flow control.
81	SMRXD2	lpd/O	Switch MII receive bit 2. Strap option: PD (default) = switch SW5-MII in full-duplex mode; PU = switch SW5-MII in half-duplex mode.
82	SMRXD1	lpd/O	Switch MII receive bit 1. Strap option: PD (default) = switch SW5-MII in 100Mbps mode and SW5-TMII in 200Mbps PU = switch MII in 10Mbps mode.
83	SMRXD0	lpd/O	Switch MII receive bit 0. Strap option: LED mode PD (default) = mode 0; PU = mode 1. See "Register 11."
			Mode 0
			Mode 1
			LEDX_2
			Lnk/Act
			100Lnk/Act
			LEDX_1
			FullD/Col
			10Lnk/Act
			LEDX_0
			Speed
			FullD

Pin for Strap-In Options (Continued)

Pin Number	Pin Name	PU/PD ⁽¹⁾	Description ⁽²⁾	
86	SCONF1	lpd	Pins 91, 86, 87 are dual MII configuration pins for the Port5 MAC5 MII. SW5-MII supports both MAC mode and PHY modes.	
			Pin#: (91, 86, 87)	Port5 Switch MAC5 SW5- MII
			000	Disable, Otri
			001	PHY Mode MII
			010	MAC Mode MII
			011	PHY Mode SNI
			100	Disable
			101	PHY Mode MII
			110	MAC Mode MII
			111	PHY Mode SNI
87	SCONF0	lpd	Dual MII configuration pin. See pin 86 descriptions.	
90	LED5-2	lpu/O	Strap option: Aging setup. See “Aging” section PU (default) = aging enable; PD = aging disable.	
91	LED5-1	lpu/O	Strap option: PU (default): enable PHY[5] MII I/F. PD: tristate all PHY[5] MII output. See “Pin 86 SCONF1.”	
92	LED5-0	lpu/O	Strap option for port 4 only. PU (default) = Enable auto-negotiation. PD = Disable auto-negotiation. Strap to register76 bit[7]	
95	LED4-0	lpu/O	LED indicator 0. Strap option: PU (default) = Normal mode. PD = Energy Detection mode (EDPD mode). Strap to register 14 bits[4:3]	
98	LED3-0	lpu/O	LED3 indicator 0. Strap option: PU (default) = Select I/O current drive strength (8mA); PD = Select I/O current drive strength (12mA). Strap to register132 bit[7:6].	
102	LED2-1	lpu/O	LED2 indicator 1. Strap option for port 3 only. PU (default) = Enable auto-negotiation. PD = Disable auto-negotiation. Strap to register60 bit[7]	
105	LED1-1	lpu/O	LED1 indicator 1. Strap option for port 3 only. PU (default) = no force flow control, normal operation. PD = force flow control. Strap to register50 bit[4]	

Pin for Strap-In Options (Continued)

Pin Number	Pin Name	PU/PD ⁽¹⁾	Description ⁽²⁾	
106	LED1-0	lpu/O	LED1 indicator 0. Strap option for port 3 only. PU (default) = force half-duplex if auto-negotiation is disabled or fails. PD = force full-duplex if auto negotiation is disabled or fails. Strap to register60 bit[5].	
113	PS1	lpd	Serial bus configuration pin. For this case, if the EEPROM is not present, the KSZ8895MLUB will start itself with the PS[1:0] =00 default register values.	
			Pin Configuration	Serial Bus Configuration
			PS[1:0]=00	I ² C Master Mode for EEPROM
			PS[1:0]=01	SMI Interface Mode
			PS[1:0]=10	SPI Slave Mode for CPU Interface
			PS[1:0]=11	Factory Test Mode (BIST)
114	PS0	lpd	Serial bus configuration pin. See “Pin 113.”	

Notes:

1. lpu = Input w/internal pull-up.
 lpd = Input w/internal pull-down.
 lpd/O = Input w/internal pull-down during reset, output pin otherwise.
 lpu/O = Input w/internal pull-up during reset, output pin otherwise.
2. PU = Strap pin pull-up.
 PD = Strap pull-down.

Introduction

The KSZ8895MLUB contains four 10/100 physical layer transceivers and five media access control (MAC) units with an integrated Layer 2 managed switch. The device runs in two modes. The first mode is as a 4-port integrated switch. The second is as a 4-port switch with the fifth MAC. In this mode, access to the fifth MAC is provided through a media independent interface (MII).

The KSZ8895MLUB has the flexibility to reside in a managed or unmanaged design. In a managed design, a host processor has complete control of the KSZ8895MLUB via the SPI bus, or via the MDC/MDIO interface with SMI mode. An unmanaged design is achieved through I/O strapping or EEPROM programming at system reset time.

On the media side, the KSZ8895MLUB supports IEEE 802.3 10BASE-T, 100BASE-TX on all ports with Auto MDI/MDIX. The KSZ8895MLUB can be used as fully-managed 4-port standalone switch or hook up to microprocessor by its SW-MII interface for an application solution.

Physical signal transmission and reception are enhanced through the use of patented analog circuitry that makes the design more efficient and allows for lower power consumption and smaller chip die size.

There are a number of major enhancements from the KS8995MA to the KSZ8895MLUB. These include: more host interface options, four queues prioritization, tag as well as port based VLAN, rapid spanning tree support, IGMP snooping support, port mirroring support and more flexible rate limiting and filtering functionality.

Physical Layer Transceiver

100BASE-TX Transmit

The 100BASE-TX transmit function performs parallel-to-serial conversion, 4B/5B coding, scrambling, NRZ-to-NRZI conversion, MLT3 encoding and transmission. The circuit starts with a parallel-to-serial conversion, which converts the MII data from the MAC into a 125MHz serial bit stream. The data and control stream is then converted into 4B/5B coding followed by a scrambler. The serialized data is further converted from NRZ-to-NRZI format, and then transmitted in MLT3 current output. The output current is set by an external 1% 12.4k Ω resistor for the 1:1 transformer ratio. It has a typical rise/fall time of 4ns and complies with the ANSI TP-PMD standard regarding amplitude balance, overshoot, and timing jitter. The wave-shaped 10BASE-T output is also incorporated into the 100BASE-TX transmitter.

100BASE-TX Receive

The 100BASE-TX receiver function performs adaptive equalization, DC restoration, MLT3-to-NRZI conversion, data and clock recovery, NRZI-to-NRZ conversion, de-scrambling, 4B/5B decoding, and serial-to-parallel conversion. The receiving side starts with the equalization filter to compensate for inter-symbol interference (ISI) over the twisted pair cable. Since the amplitude loss and phase distortion is a function of the length of the cable, the equalizer has to adjust its characteristics to optimize the performance. In this design, the variable equalizer will make an initial estimation based on comparisons of incoming signal strength against some known cable characteristics, then tunes itself for optimization. This is an ongoing process and can self-adjust against environmental changes such as temperature variations.

The equalized signal then goes through a DC restoration and data conversion block. The DC restoration circuit is used to compensate for the effect of baseline wander and improve the dynamic range. The differential data conversion circuit converts the MLT3 format back to NRZI. The slicing threshold is also adaptive.

The clock recovery circuit extracts the 125MHz clock from the edges of the NRZI signal. This recovered clock is then used to convert the NRZI signal into the NRZ format. The signal is then sent through the de-scrambler followed by the 4B/5B decoder. Finally, the NRZ serial data is converted to the MII format and provided as the input data to the MAC.

PLL Clock Synthesizer

The KSZ8895MLUB generates 125MHz, 83MHz, 41MHz, 25MHz and 10MHz clocks for system timing. Internal clocks are generated from an external 25MHz crystal or oscillator.

Scrambler/De-Scrambler (100BASE-TX Only)

The purpose of the scrambler is to spread the power spectrum of the signal in order to reduce EMI and baseline wander. The data is scrambled through the use of an 11-bit wide linear feedback shift register (LFSR). This can generate a 2047-bit non-repetitive sequence. The receiver will then de-scramble the incoming data stream with the same sequence at the transmitter.

10BASE-T Transmit

The output 10BASE-T driver is incorporated into the 100BASE-T driver to allow transmission with the same magnetics. They are internally wave-shaped and pre-emphasized into outputs with typical 2.3V amplitude. The harmonic contents are at least 27dB below the fundamental when driven by an all-ones Manchester-encoded signal.