



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com




Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DESCRIPTION: .085" RIBBON R/A BOARD MOUNT

A B C D E

14	1.720 43.70	1.008 25.60	.984 25.00	.618 15.70	1.417 35.99
24	2.146 54.50	1.436 36.47	.984 25.00	.618 15.70	1.843 46.79
36	2.662 67.60	1.943 49.35	.984 25.00	.618 15.70	2.352 59.74
50	3.260 82.80	2.539 64.47	.984 25.00	.618 15.70	2.947 74.85

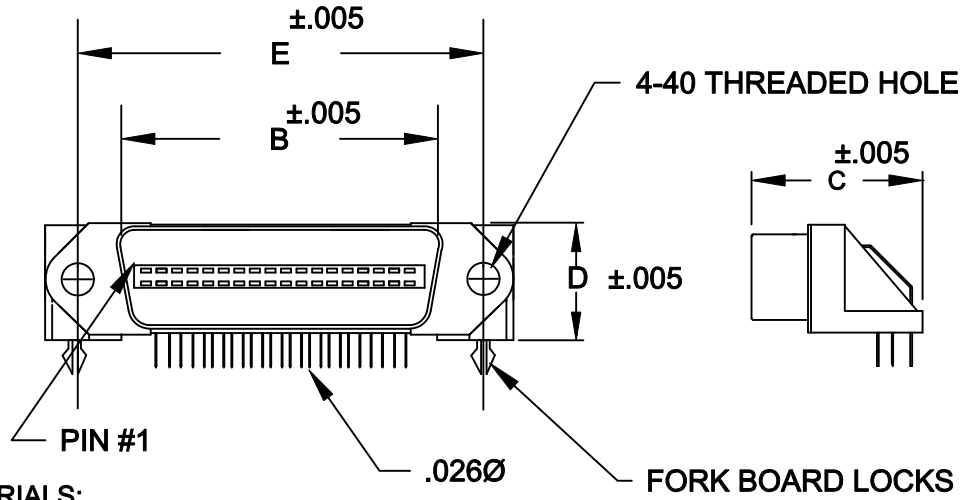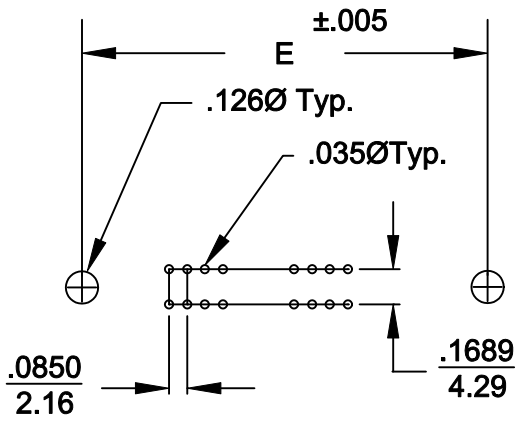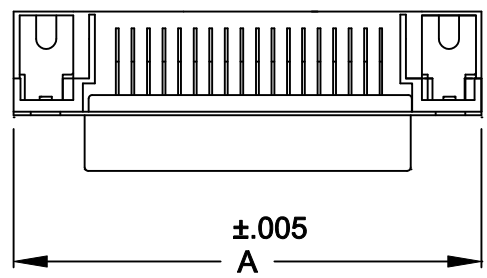

112-YYY-113R491

SERIES _____
 POSITIONS _____
 014
 024
 036
 050

GENDER _____
 1 = MALE

TERMINATION _____
 1 = DIP SOLDER

SHELL PLATING _____
 3 = NICKEL

HARDWARE OPTIONS _____
 49 = FORK BOARD LOCK (PCB)

PLATING OPTIONS _____
 01 = GOLD FLASH

MATERIALS:

INSULATOR: PA9T, UL94V-0, BLUE
 260°C PROCESS TEMP.
 CONTACTS: COPPER ALLOY
 CONTACT PLATING: GOLD FLASH IN THE MATING AREA
 MATTE TIN IN THE SOLDER AREA
 SHELL: STEEL, NICKEL PLATED
 BOARDLOCK: STEEL, NICKEL PLATED

CONTACT INSERTION FORCE: 25 Lbs. Max.
 CONTACT SEPARATION FORCE: 2 Lbs. Min.

ELECTRICALS:

CONTACT CURRENT RATING: 1 AMP
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
 VOLTAGE: 250 VAC Max.
 INSULATION RESISTANCE: 1000 MOhms Min.
 CONTACT RESISTANCE: 30 mOHMS Max.
 OPERATING TEMPERATURE: -55°C TO +105°C

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 8-22-05
			CHECKED:	DATE:
NorComp	SCALE: 1:1	SHEET 1	OF 1	REV 4
	DWG NO. 112-YYY-113R491			