



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Features

- Compatible with all inserts size Han® 3 A
- High robustness via an internal locking mechanism
- Optimal EMC properties
- High quality industrial design
- With entry for M20 or M25 cable glands


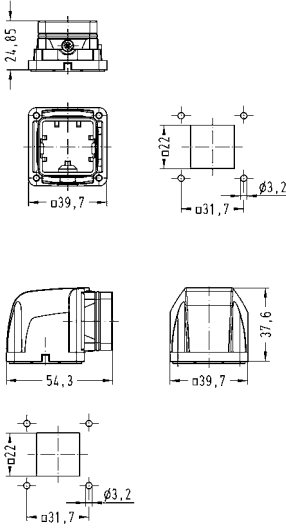


Technical characteristics

| | |
|---|----------------------|
| Material | zinc die-cast |
| Surface | |
| Hood | Epoxy powder paint |
| Housings bulkhead mounting | zinc passivation |
| Locking element | PA / stainless steel |
| Limiting temperatures | -40 °C ... +125 °C |
| Un-/Locking temperatures | -10 °C ... +85 °C |
| Degree of protection acc. to DIN EN 60 529 | |
| for coupled connector | IP 65 / IP 67 |
| Tightening torque | |
| M3 fixing screw | 1 Nm |

Hoods Han-Yellock®

| Identification | Part number | Cable entry | Drawing | Dimensions in mm |
|--|--|--------------------|--|------------------|
| <p>Hood top entry Han-Yellock® 10</p>  | <p>11 20 003 1400 11 20 003 1401</p> | <p>M20 M25</p> |  | |
| <p>Hood angled entry Han-Yellock® 10</p>  | <p>11 20 003 1600 11 20 003 1601</p> | <p>M20 M25</p> |  | |

Housings Han-Yellock®

| Identification | Part number | Cable entry | Drawing | Dimensions in mm |
|--|-----------------------|-------------|--|------------------|
| <p>Housings bulkhead mounting</p> <p>Han-Yellock® 10</p>  | <p>11 20 003 0300</p> | |  | |
| <p>Han-Yellock® 10</p>  | <p>11 20 003 0800</p> | |  | |