



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SST™-PB3S-CPX Slave Modules for PROFIBUS*



SST™-PB3S-CPX Modules connect Rockwell Automation CompactLogix L2, L3 and L4 controllers as a Slave to PROFIBUS* DP-V0 networks, enabling high-performance, low-cost solutions for industrial automation applications

Features and Benefits

10/100 Mb Ethernet port	Enables fast downloads, remote connections/monitoring. Provides backplane or front-module configuration options. Accommodates low-cost cable
Up to 244 input bytes and 244 output bytes per Slave	Delivers high data throughput as Slave device
Software configured as Slave	Requires no ladder logic
Simple PROFIBUS Slave capability	Provides a low-cost module
MicroSD card slot (8 GB MicroSD card included)	Facilitates easy module swap-out
MTBF of 181 years	Presents reliable, trouble-free usage

Applications

- Marine
- Packaging
- Agro-Food
- Mining
- Automotive



SST™-PB3S-CPX
PROFIBUS* Slave Module



SST™-PB3S-CPX Slave Modules for PROFIBUS*



Specifications

Description

LINK, SPEED, SD, OK, STATE, FAULT LEDs provide 29 visual fault/state indications
 Changes to PROFIBUS* configuration with PLC in RUN mode
 Autoscan network supported
 Support multiple modules in rack
 Supports CompactLogix† L2 and L3 processor, rev. 15 and higher, L4 rev. 20 and higher
 Slave, 244 input bytes, 244 output bytes, 244-word total
 One 10/100 Mb/s Ethernet port, RJ-45, configuration and diagnostics
 Firmware upgradeable

OS supported: Windows XP, 7 (32, 64-bit); Vista, 8 (32, 64-bit)
 Operating Temperatures: 0 to 60°C
 Storage Temperatures: -40 to 85°C
 Relative Humidity: 5 to 95%, non-condensing
 Slave DP-VO
 One PROFIBUS port, DB9 female, Galvanic isolation 1000V
 PROFIBUS speed: 9.6 Kbps up to 12 Mbps
 MTBF: 181 years at 25°C
 Auto-Run
 Maximum Distance Rating: 4 slots
 Status data: 250 words

Included Hardware/Software

One, SST-PB3S-CPX PROFIBUS Slave Module
 One, 8 GB MicroSD card
 One, Product CD (engineering tools, configuration console)

Compatible Protocols

Slave DP-VO


Conformance

RoHS compliant
 CE Certified
 Ex (ATEX)
 FCC
 Korea CC
 UL Class I Div 2 Groups A, B, C, D
 PI Certified

Ordering Information

Order No.	Product Name	Module
112016-0029	SST-PB3S-CPX	SST™ PROFIBUS* Slave Communication Module for Rockwell CompactLogix, includes Remote Link Library

PROFIBUS* Slave Module, SST-PB3S-CPX, Networking Capabilities Diagram

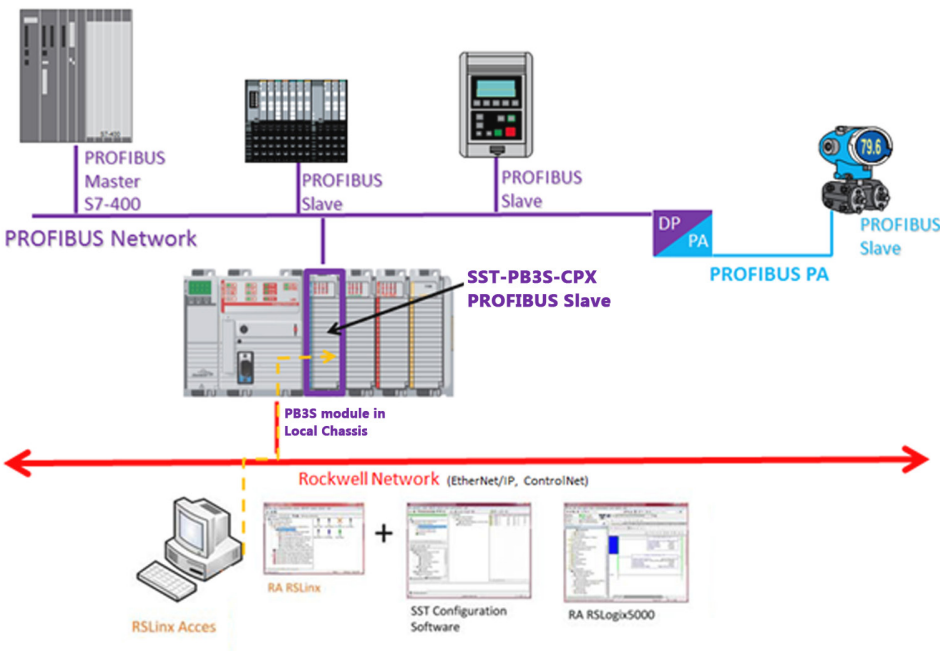

*PROFIBUS is a trademark of PROFIBUS International

†CompactLogix is a registered trademark of Rockwell Automation, Inc.

www.molex.com/link/sstcommunicationmodules.html