



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## Very low drop voltage regulators with inhibit function

Datasheet - production data

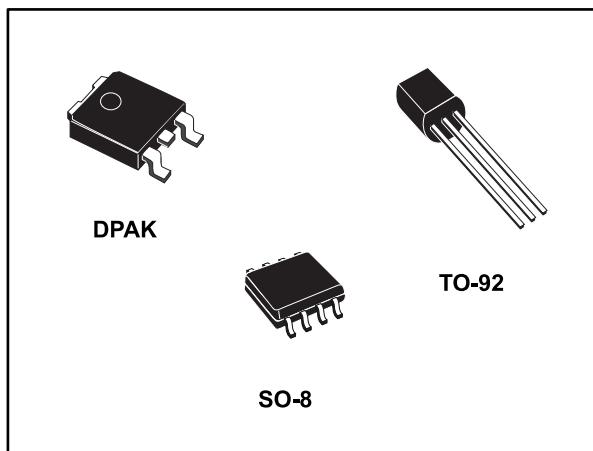

### Features

- AEC-Q100 qualified (DPAK only)
- Very low dropout voltage (90 mV typ. at 10 mA load)
- Low quiescent current (typ. 2.5 mA, at 100 mA load)
- Output current up to 100 mA
- Adjustable (from  $V_{OUT} = 2.5$  V only SO-8) and fixed (3.3 V and 5 V) output voltage version
- Internal current and thermal limit
- Load dump protection up to 60 V
- Reverse transient protection up to - 50 V
- Temperature range: - 40 to 125 °C
- Package available: TO-92, DPAK, SO-8 (with inhibit control)

### Description


The LM2931 are very low drop regulators. The very low drop voltage and the low quiescent current make them particular suitable for low noise, low power applications and in battery-powered systems. In the 8-pin configuration (SO-8), fully compatible with the older L78 family, a shutdown logic control function is available. This means that when the device is used as a local regulator it is possible to put a part of the board in standby, decreasing total power consumption. Ideal for automotive applications, LM2931 is protected from reverse battery installations or 2 battery jumps. During the transient, such as a 60 V load dump, when the input voltage can exceed the specified maximum operating input voltage of 26 V, the regulator automatically shuts down to protect both internal circuitry and the load.

## Contents

<b>1</b>	<b>Diagram.....</b>	<b>3</b>
<b>2</b>	<b>Pin configuration.....</b>	<b>3</b>
<b>3</b>	<b>Maximum ratings .....</b>	<b>4</b>
<b>4</b>	<b>Application circuits .....</b>	<b>5</b>
<b>5</b>	<b>Electrical characteristics .....</b>	<b>6</b>
<b>6</b>	<b>Typical characteristics.....</b>	<b>9</b>
<b>7</b>	<b>Package information .....</b>	<b>14</b>
7.1	DPAK package information .....	14
7.2	DPAK packing information .....	17
7.3	SO-8 package information .....	18
7.4	SO-8 packing information.....	20
7.5	TO-92 package information.....	21
<b>8</b>	<b>Ordering information.....</b>	<b>22</b>
<b>9</b>	<b>Revision history .....</b>	<b>23</b>


## 1 Diagram

Figure 1: Schematic diagram

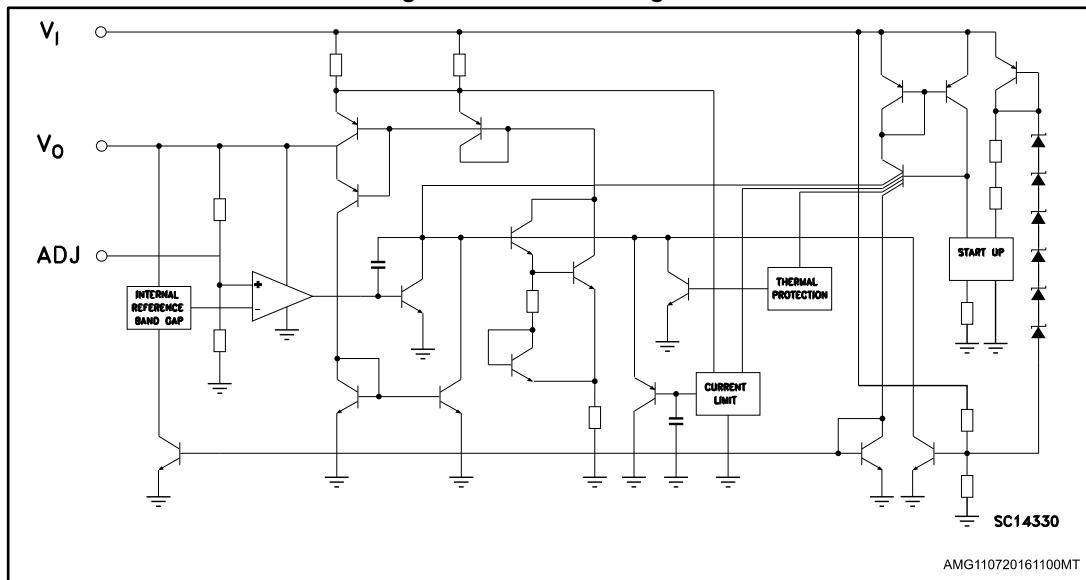

## 2 Pin configuration

Figure 2: Pin connections (top view)

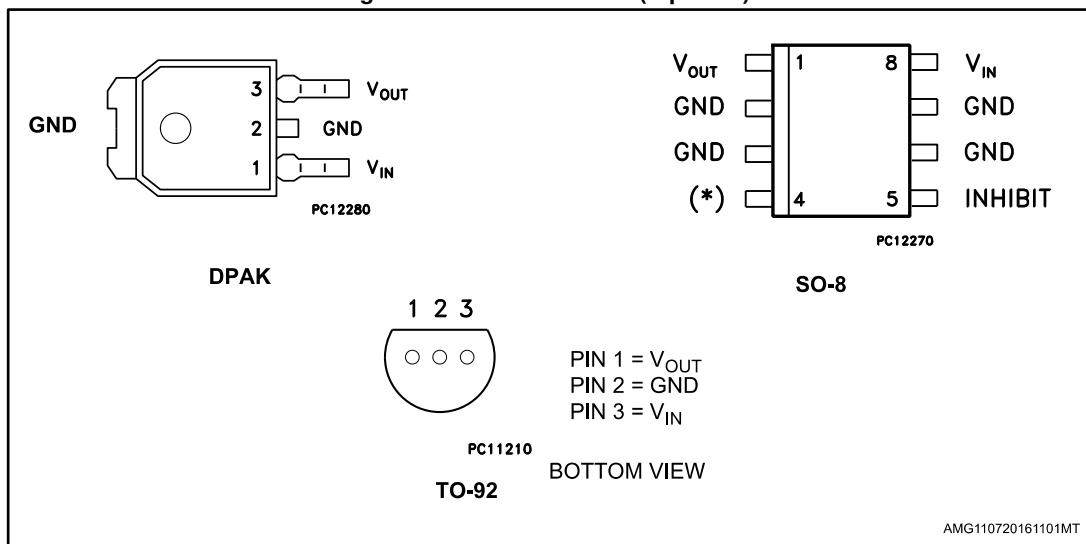

(\*) ADJ pin on the adjustable version, not connected in the fixed output version.

### 3 Maximum ratings

Table 1: Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_I$	DC positive input voltage	40	V
$V_I$	DC reverse input voltage	-15	V
$V_I$	Transient input voltage ( $T < 100$ ms)	60	V
$V_I$	Transient reverse input voltage ( $T < 100$ ms)	-50	V
$V_{INH}$	Inhibit input voltage	40	V
$I_O$	Output current	Internally limited	
$T_{STG}$	Storage temperature range	-65 to 150	°C
$T_{OP}$	Operating junction temperature range	-40 to 125	°C



Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 2: Thermal data

Symbol	Parameter	SO-8	DPAK	TO-92	Unit
$R_{thJC}$	Thermal resistance junction-case	20	8	57	°C/W
$R_{thJA}$	Thermal resistance junction-ambient	55 <sup>(1)</sup>	100	200	°C/W

#### Notes:

<sup>(1)</sup>Considering 6 cm<sup>2</sup> of copper board heat-sink.

## 4 Application circuits

Figure 3: Application circuit for fixed output


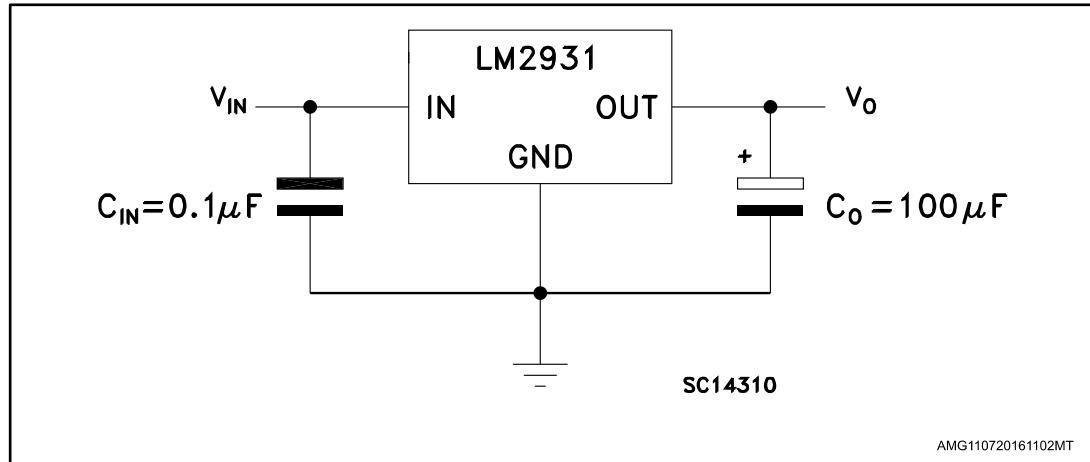


Figure 4: Application circuit for adjustable output

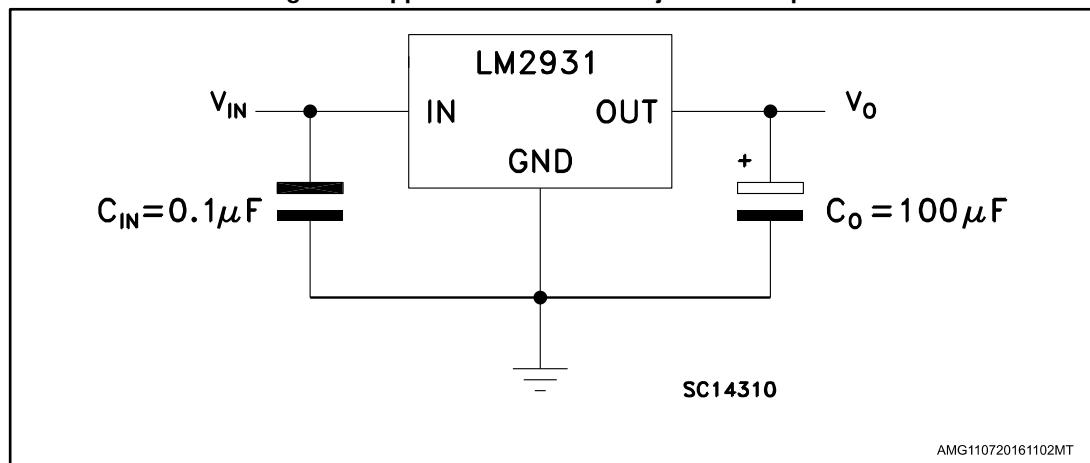

$R_1$  suggested value = 27 k $\Omega$

$$V_O = V_{REF} (R_1 + R_2) / R_1$$

Inhibit pin: regulator is enabled when  $V_{INH} < 1.2$  V , disabled when  $V_{INH} > 3.25$  V

## 5 Electrical characteristics

Refer to the application circuit [Figure 3: "Application circuit for fixed output"](#),  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1 \mu\text{F}$ ,  $C_O = 100 \mu\text{F}$ ,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $V_{INH} = 0 \text{ V}$ , unless otherwise specified.

**Table 3: Electrical characteristics of LM2931A33/LM2931A33Y**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_I$	Maximum operating input voltage	$I_O = 10 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$	26			V
$V_O$	Output voltage		3.175	3.3	3.425	V
$V_O$	Output voltage	$I_O = 100 \text{ mA}$ , $V_I = 6 \text{ to } 26 \text{ V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$	3.135	3.3	3.465	V
$DV_O$	Line regulation	$V_I = 9 \text{ to } 16 \text{ V}$		2	10	mV
		$V_I = 6 \text{ to } 26 \text{ V}$		4	33	
$DV_O$	Load regulation	$I_O = 5 \text{ to } 100 \text{ mA}$		10	33	mV
$V_d$	Dropout voltage <sup>(1)</sup>	$I_O = 10 \text{ mA}$		90	250	mV
		$I_O = 100 \text{ mA}$		250	600	
$I_d$	Quiescent current ON MODE	$I_O = 100 \text{ mA}$		2.5	30	mA
	OFF MODE	$V_{INH} = 2.5 \text{ V}$ , $R_{LOAD} = 330 \Omega$		0.3	1	mA
$I_{SC}$	Short circuit current		100	300		mA
$SVR$	Supply voltage rejection	$I_O = 100 \text{ mA}$ , $V_I = 14 \pm 2 \text{ V}$ $f = 120 \text{ Hz}$	55	78		dB
$V_{IL}$	Control input voltage low	$T_J = -40 \text{ to } 125^\circ\text{C}$		2	1.2	V
$V_{IH}$	Control input voltage high	$T_J = -40 \text{ to } 125^\circ\text{C}$	3.25	2		V
$I_{INH}$	Inhibit input current	$V_{INH} = 2.5 \text{ V}$		22	50	$\mu\text{A}$
$V_I$	Transient input voltage	$R_{LOAD} = 330 \Omega$ , $T < 100 \text{ ms}$	60	70		V
$V_I$	Reverse polarity input voltage	$V_O = \pm 0.3 \text{ V}$ , $R_{LOAD} = 330 \Omega$	-15	-50		V
$V_I$	Reverse polarity input voltage transient	$R_{LOAD} = 330 \Omega$ , $T < 100 \text{ ms}$	-50			V
$e_N$	Output noise voltage	$B = 10 \text{ Hz to } 100 \text{ kHz}$		330		$\mu\text{V}_{\text{RMS}}$

**Notes:**

(1)  $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.

Refer to the application circuit [Figure 3: "Application circuit for fixed output"](#),  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1 \mu\text{F}$ ,  $C_O = 100 \mu\text{F}$ ,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $V_{INH} = 0 \text{ V}$ , unless otherwise specified.

Table 4: Electrical characteristics of LM2931A50/ LM2931A50Y

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_I$	Maximum operating input voltage	$I_O = 10 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$	26			V
$V_O$	Output voltage		4.81	5	5.19	V
$V_O$	Output voltage	$I_O = 100 \text{ mA}$ , $V_I = 6 \text{ to } 26 \text{ V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$	4.75	5	5.25	V
$DV_O$	Line regulation	$V_I = 9 \text{ to } 16 \text{ V}$		2	10	mV
		$V_I = 6 \text{ to } 26 \text{ V}$		4	30	
$DV_O$	Load regulation	$I_O = 5 \text{ to } 100 \text{ mA}$		15	50	mV
$V_d$	Dropout voltage <sup>(1)</sup>	$I_O = 10 \text{ mA}$		90	200	mV
		$I_O = 100 \text{ mA}$		250	600	
$I_d$	Quiescent current ON MODE	$I_O = 100 \text{ mA}$		2.5	30	mA
	OFF MODE	$V_{INH} = 2.5 \text{ V}$ , $R_{LOAD} = 500 \Omega$		0.3	1	mA
$I_{SC}$	Short circuit current		100	300		mA
$SVR$	Supply voltage rejection	$I_O = 100 \text{ mA}$ , $V_I = 14 \pm 2 \text{ V}$ $f = 120 \text{ Hz}$	55	75		dB
$V_{IL}$	Control input voltage low	$T_J = -40 \text{ to } 125^\circ\text{C}$		2	1.2	V
$V_{IH}$	Control input voltage high	$T_J = -40 \text{ to } 125^\circ\text{C}$	3.25	2		V
$I_{INH}$	Inhibit input current	$V_{INH} = 2.5 \text{ V}$		22	50	$\mu\text{A}$
$V_I$	Transient input voltage	$R_{LOAD} = 500 \Omega$ , $T < 100 \text{ ms}$	60	70		V
$V_I$	Reverse polarity input voltage	$V_O = \pm 0.3 \text{ V}$ , $R_{LOAD} = 500 \Omega$	-15	-50		V
$V_I$	Reverse polarity input voltage transient	$R_{LOAD} = 500 \Omega$ , $T < 100 \text{ ms}$	-50			V
$e_N$	Output noise voltage	$B = 10 \text{ Hz to } 100 \text{ kHz}$		500		$\mu\text{V}_{\text{RMS}}$

**Notes:**

<sup>(1)</sup> $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.

Refer to the application circuit [Figure 4: "Application circuit for adjustable output"](#) with  $R_1 = 27 \text{ k}\Omega$  and  $R_2 = 40.5 \text{ k}\Omega$ ,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1 \mu\text{F}$ ,  $C_O = 100 \mu\text{F}$ ,  $V_I = 14 \text{ V}$ ,  $I_O = 10 \text{ mA}$ ,  $V_{INH} = 0 \text{ V}$ , unless otherwise specified.

Table 5: Electrical characteristics of LM2931 (adjustable version)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_I$	Maximum operating input voltage	$I_O = 10 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$	26			V
$V_{REF}$	Reference voltage <sup>(1)</sup>		1.14	1.2	1.26	V
$V_{REF}$	Reference voltage <sup>(1)</sup>	$I_O = 100 \text{ mA}$ , $T_J = -40 \text{ to } 125^\circ\text{C}$	1.08	1.2	1.32	V
$DV_O$	Line regulation	$V_I = 3.6 \text{ to } 26 \text{ V}$		0.6	4.5	mV
$DV_O$	Load regulation	$I_O = 5 \text{ to } 100 \text{ mA}$		9	30	mV
$V_d$	Dropout voltage <sup>(2)</sup>	$I_O = 10 \text{ mA}$		90	200	mV
		$I_O = 100 \text{ mA}$		250	600	
$I_d$	Quiescent current ON MODE	$I_O = 100 \text{ mA}$		2.5	30	mA
	OFF MODE	$V_{INH} = 2.5 \text{ V}$ , $R_{LOAD} = 300 \Omega$		0.3	1	mA
$I_{SC}$	Short circuit current		100	300		mA
$SVR$	Supply voltage rejection	$I_O = 100 \text{ mA}$ , $V_I = 14 \pm 2 \text{ V}$ $f = 120 \text{ Hz}$	55	80		dB
$V_{IL}$	Control input voltage low	$T_J = -40 \text{ to } 125^\circ\text{C}$		2	1.2	V
$V_{IH}$	Control input voltage high	$T_J = -40 \text{ to } 125^\circ\text{C}$	3.25	2		V
$I_{INH}$	Inhibit input current	$V_{INH} = 2.5 \text{ V}$		22	50	$\mu\text{A}$
$V_I$	Transient input voltage	$R_{LOAD} = 300 \Omega$ , $T < 100 \text{ ms}$	60	70		V
$V_I$	Reverse polarity input voltage	$V_O = \pm 0.3 \text{ V}$ , $R_{LOAD} = 300 \Omega$	-15	-50		V
$V_I$	Reverse polarity input voltage transient	$R_{LOAD} = 300 \Omega$ , $T < 100 \text{ ms}$	-50			V
$e_N$	Output noise voltage	$B = 10 \text{ Hz to } 100 \text{ kHz}$		330		$\mu\text{V}_{\text{RMS}}$

**Notes:**


<sup>(1)</sup>Reference voltage is measured from  $V_{OUT}$  to ADJ pin.

<sup>(2)</sup> $V_d$  measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V.


## 6 Typical characteristics

Unless otherwise specified  $C_I = 0.1 \mu F$ ,  $C_O = 100 \mu F$ .


**Figure 5: Output voltage vs temperature**

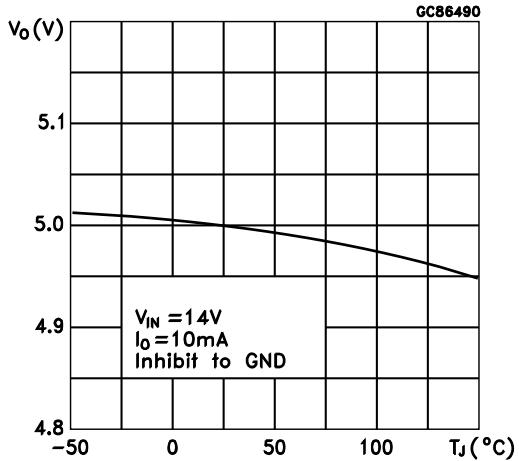


**Figure 6: Output voltage vs temperature**

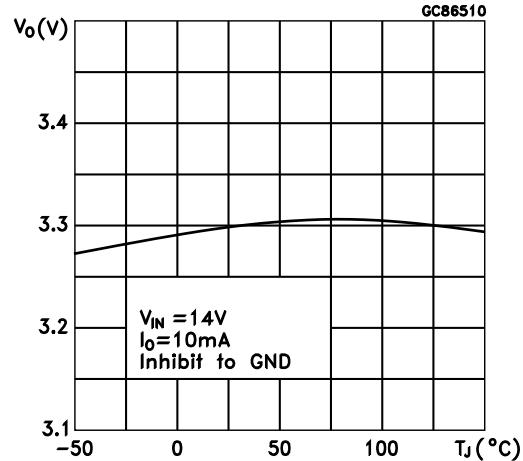

**Figure 7: Reference voltage vs temperature**

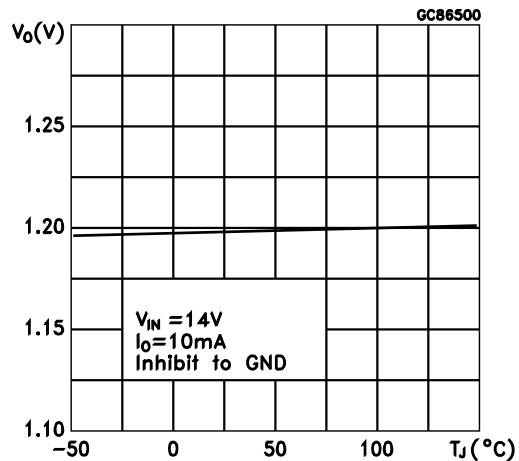

**Figure 8: Line regulation vs temperature**

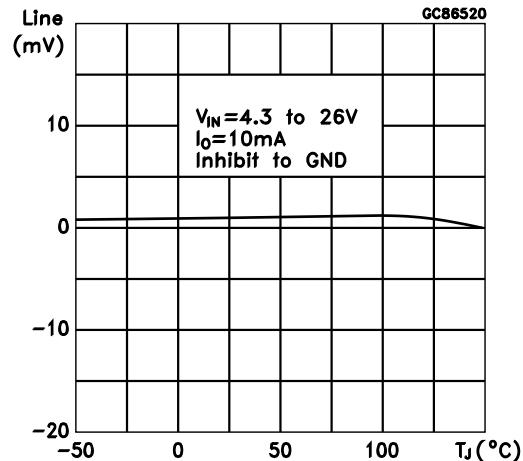

## Typical characteristics

LM2931

Figure 9: Load regulation vs temperature

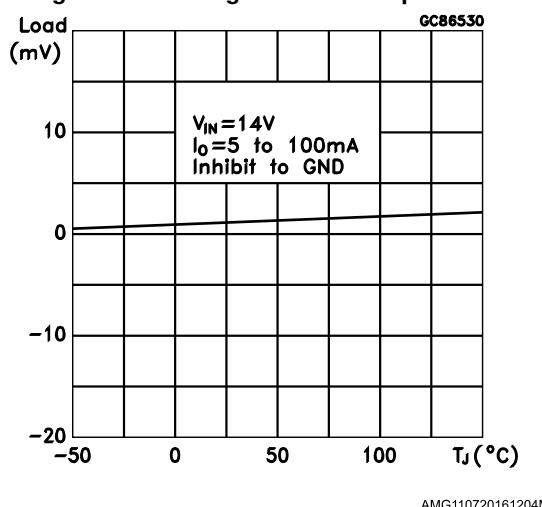


Figure 10: Dropout voltage vs temperature

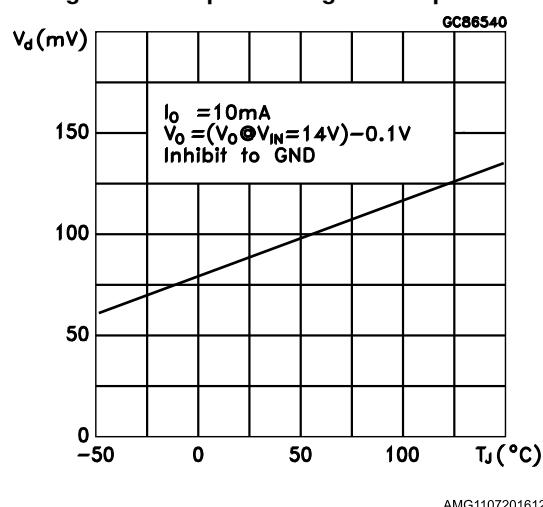


Figure 11: Dropout voltage vs temperature

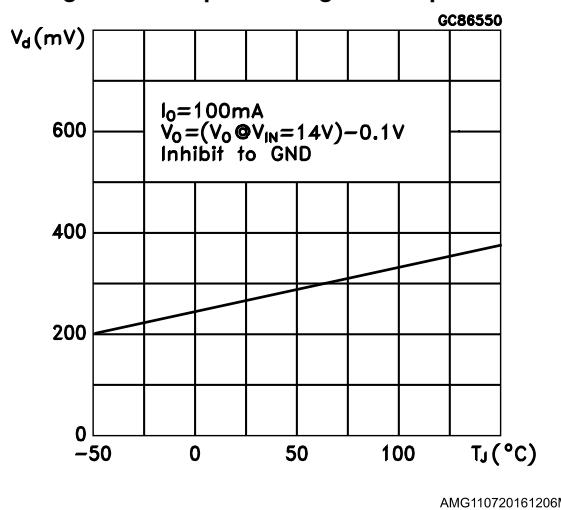


Figure 12: Dropout voltage vs output current

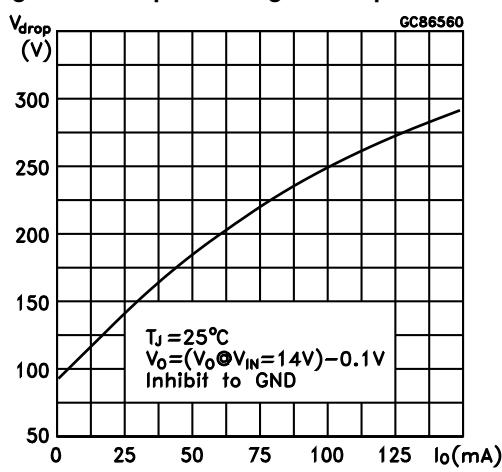


Figure 13: Output voltage vs input voltage

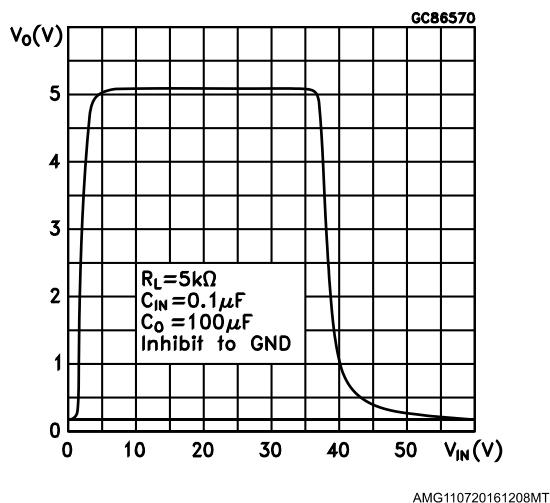


Figure 14: Short circuit current vs drop voltage

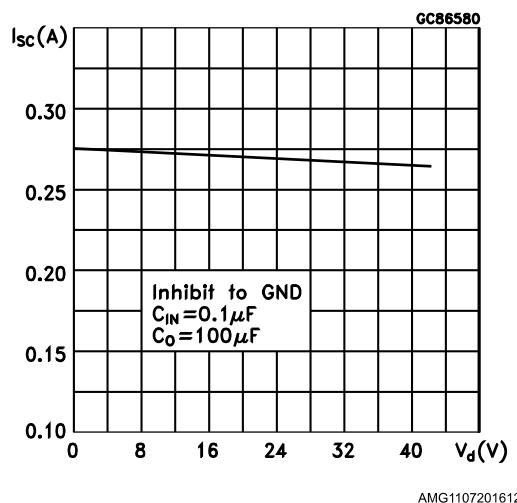


Figure 15: Quiescent current vs temperature


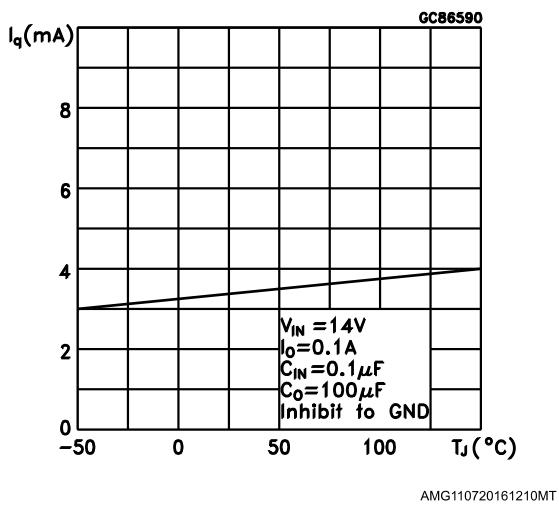


Figure 16: Quiescent current vs input voltage

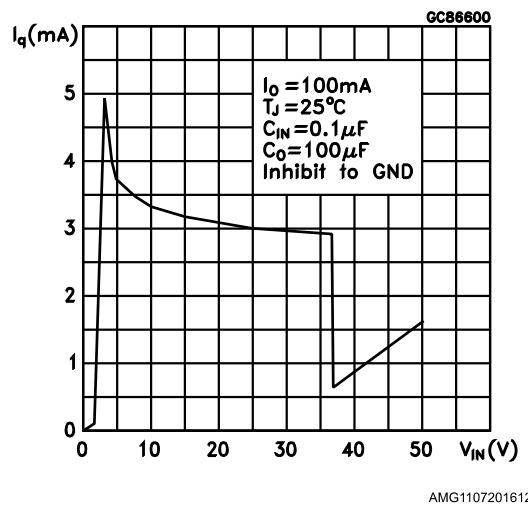

## Typical characteristics

LM2931

Figure 17: Quiescent current vs output current

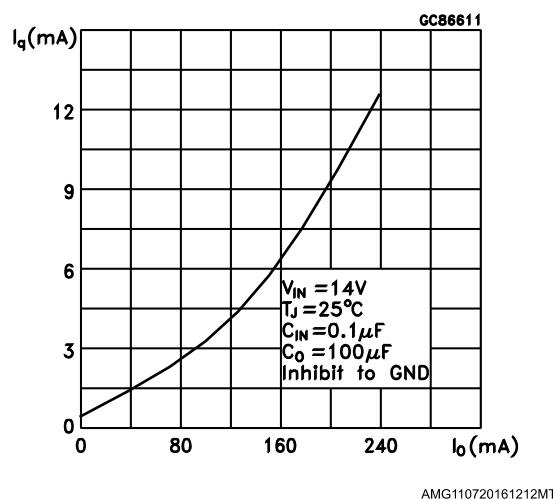


Figure 18: Supply voltage rejection vs temperature

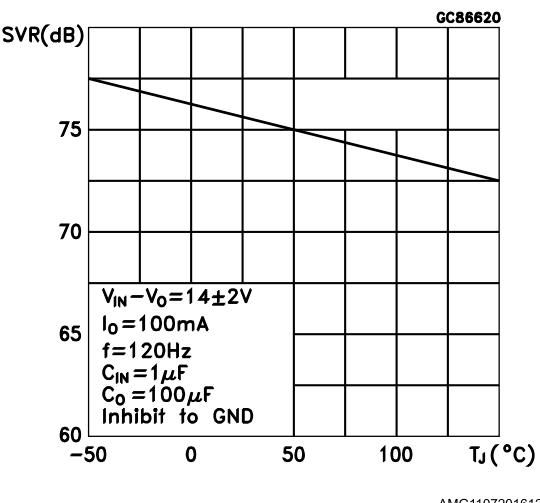


Figure 19: Supply voltage rejection vs frequency





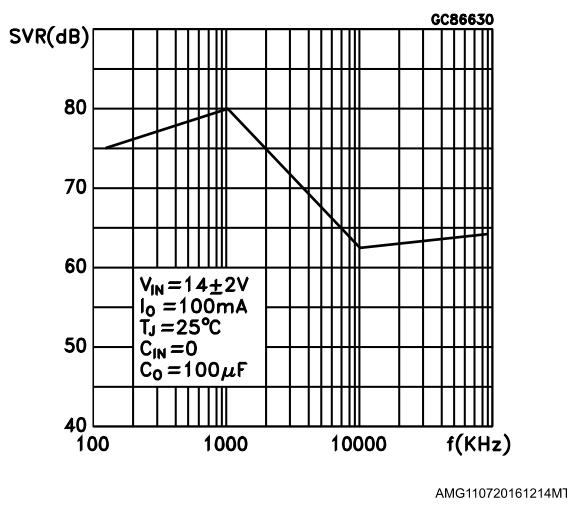


Figure 20: Supply voltage rejection vs output current

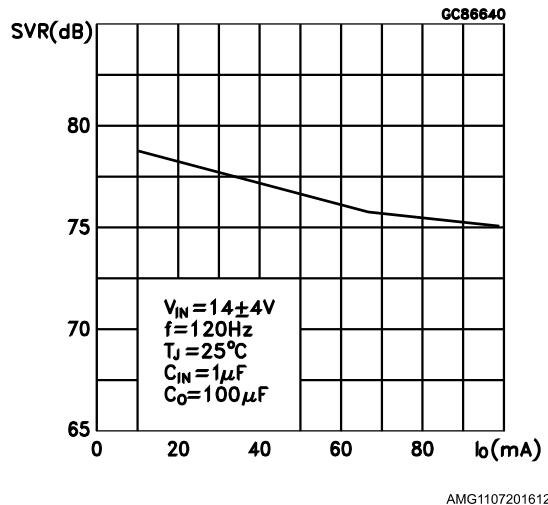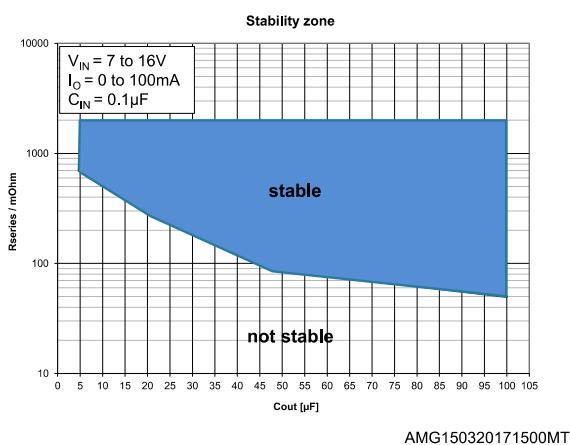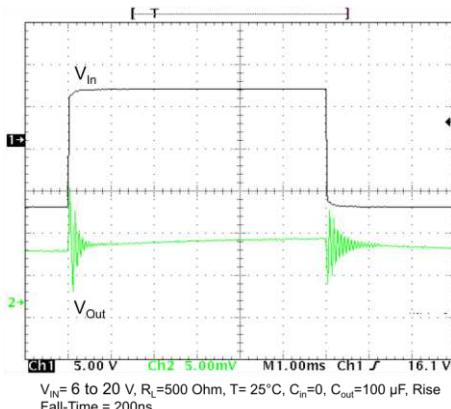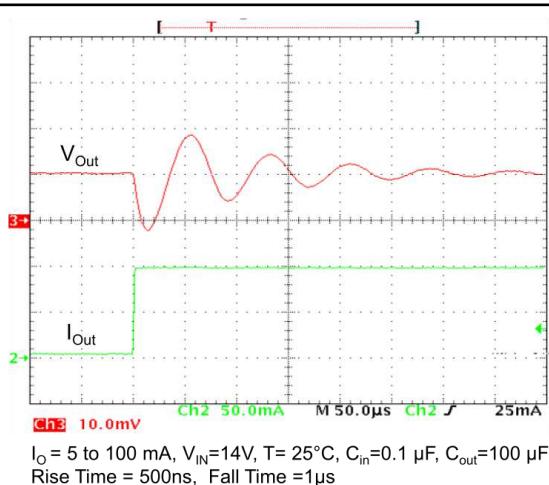


**Figure 21: Stability vs Co****Figure 22: Line transient****Figure 23: Load transient**

## 7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.

### 7.1 DPAK package information


Figure 24: DPAK package outline

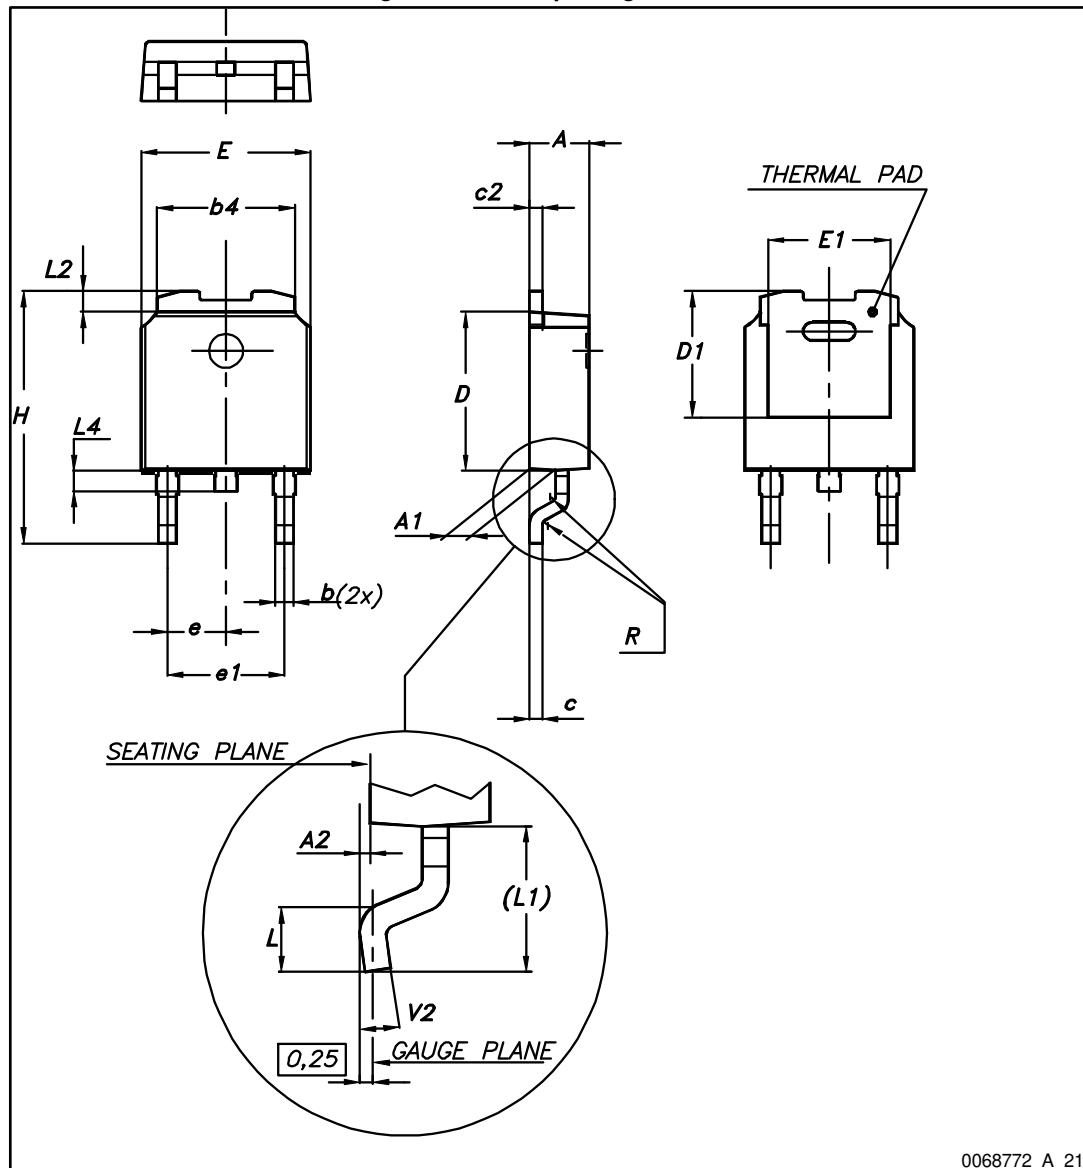

0068772\_A\_21

**Table 6: DPAK mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	2.20		2.40
A1	0.90		1.10
A2	0.03		0.23
b	0.64		0.90
b4	5.20		5.40
c	0.45		0.60
c2	0.48		0.60
D	6.00		6.20
D1		5.10	
E	6.40		6.60
E1		4.70	
e		2.28	
e1	4.40		4.60
H	9.35		10.10
L	1.00		1.50
(L1)		2.80	
L2		0.80	
L4	0.60		1.00
R		0.20	
V2	0°		8°

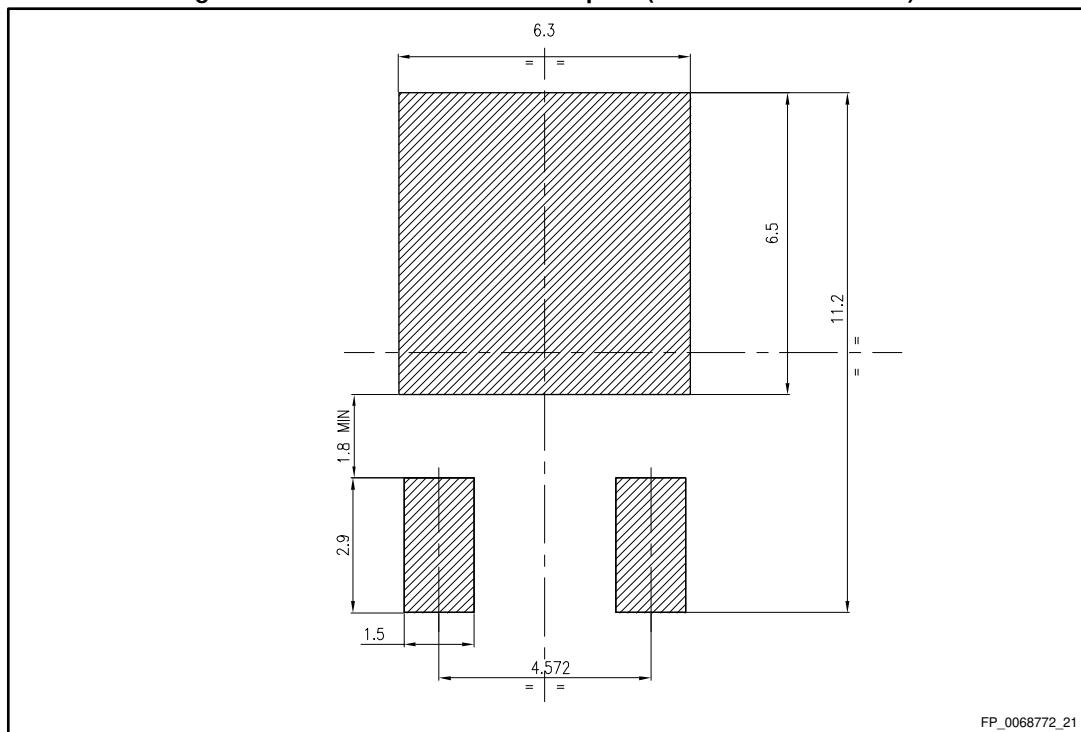**Figure 25: DPAK recommended footprint (dimensions are in mm)**

## 7.2 DPAK packing information

Figure 26: DPAK tape outline


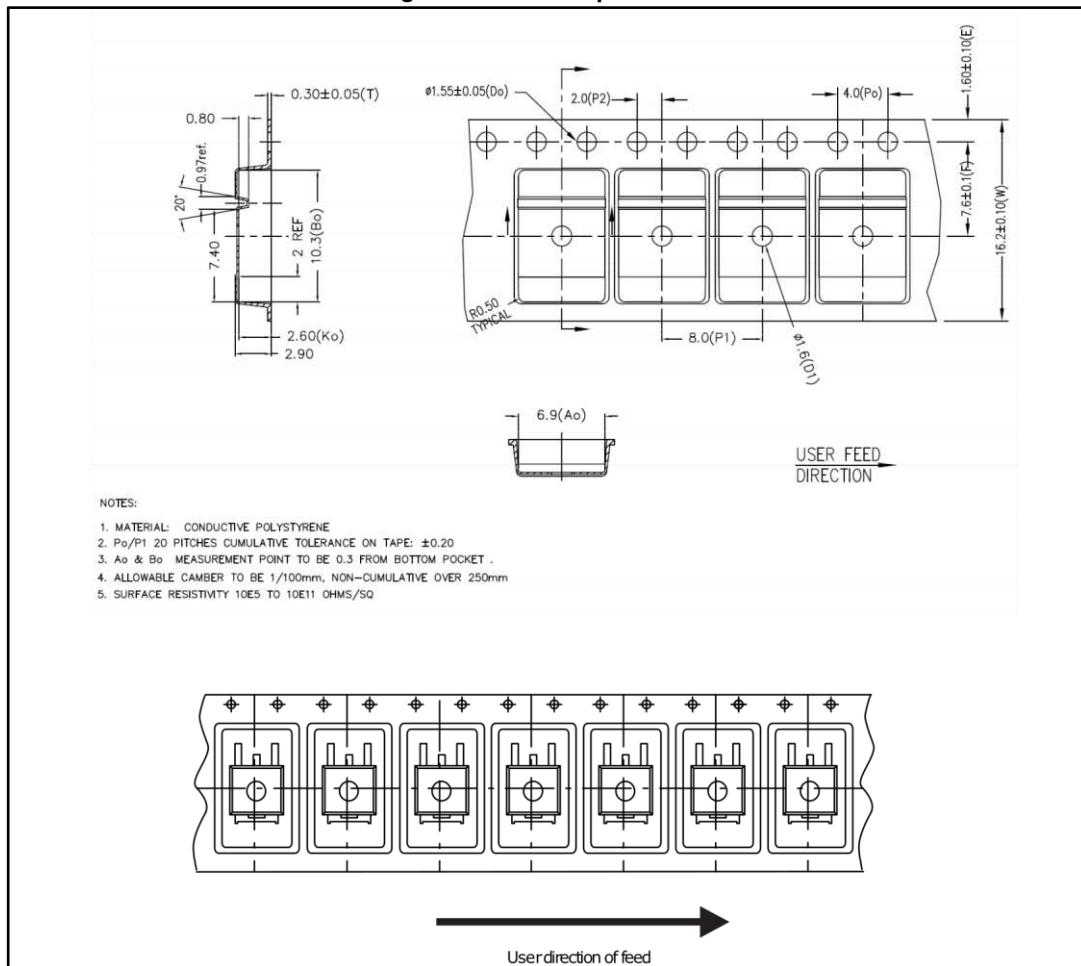


Figure 27: DPAK reel outline

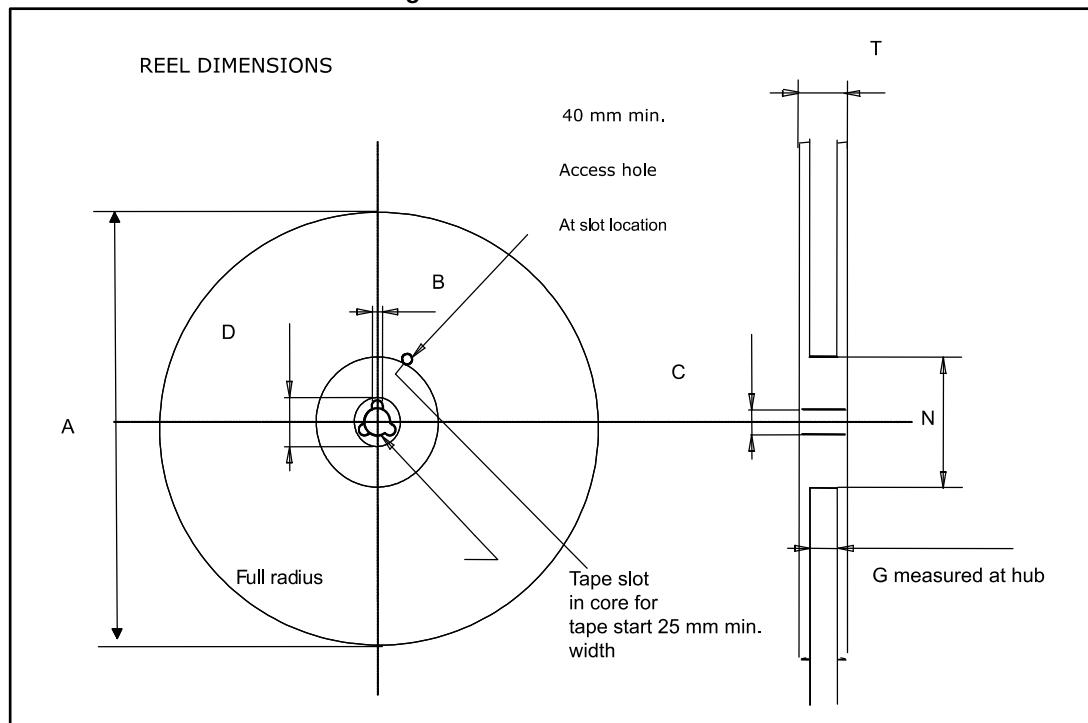

### 7.3 SO-8 package information

Figure 28: SO-8 package outline


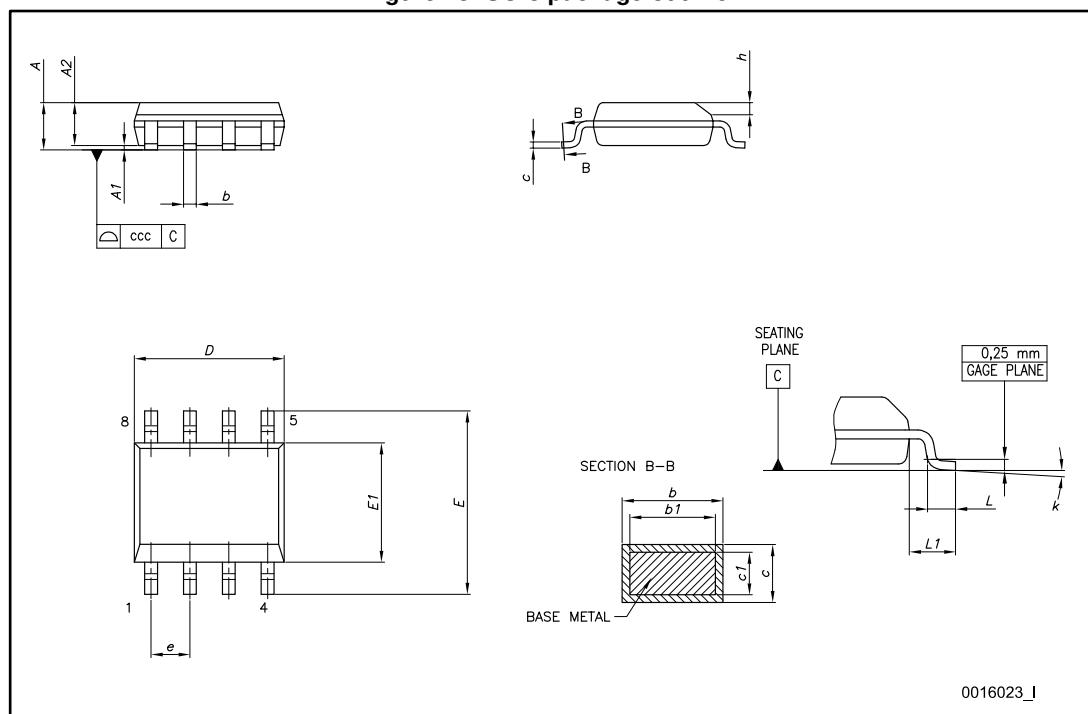


Table 7: SO-8 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A			1.75
A1	0.10		0.25
A2	1.25		
b	0.28		0.48
c	0.17		0.23
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e		1.27	
h	0.25		0.50
L	0.40		1.27
L1		1.04	
k	0°		8°
ccc			0.10

Figure 29: SO-8 recommended footprint

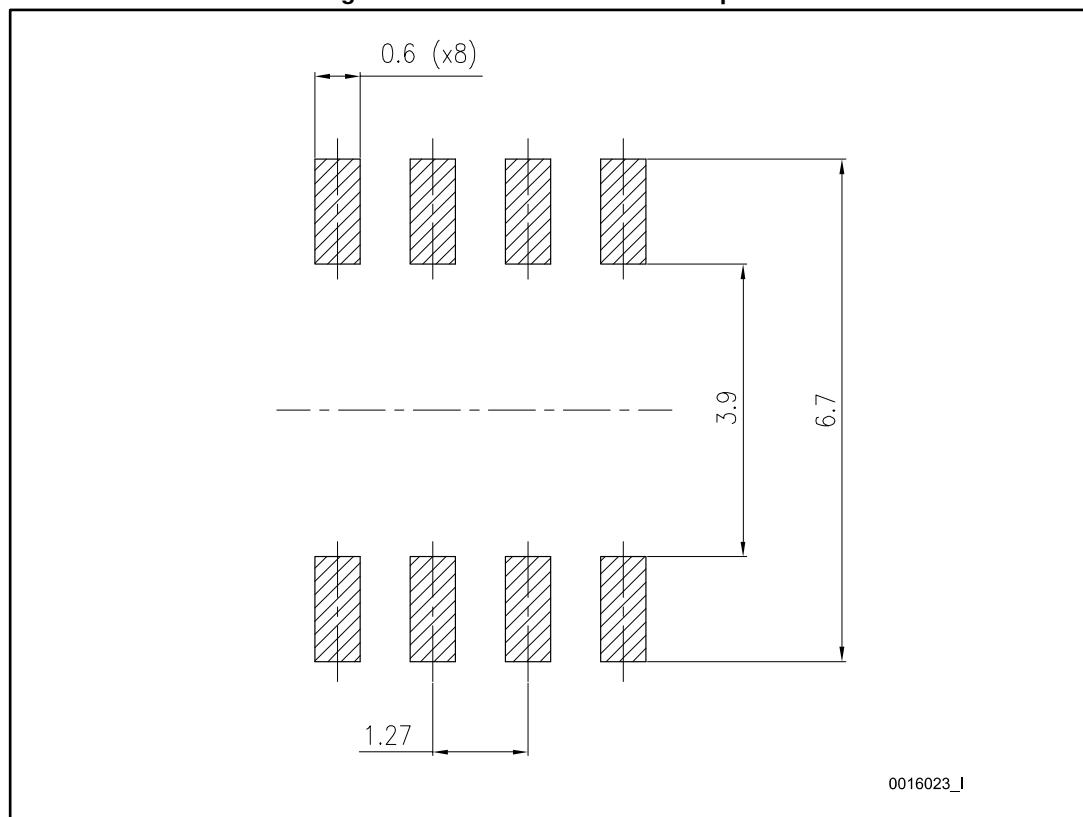

0016023\_I

## 7.4 SO-8 packing information

Figure 30: SO-8 tape and reel outline

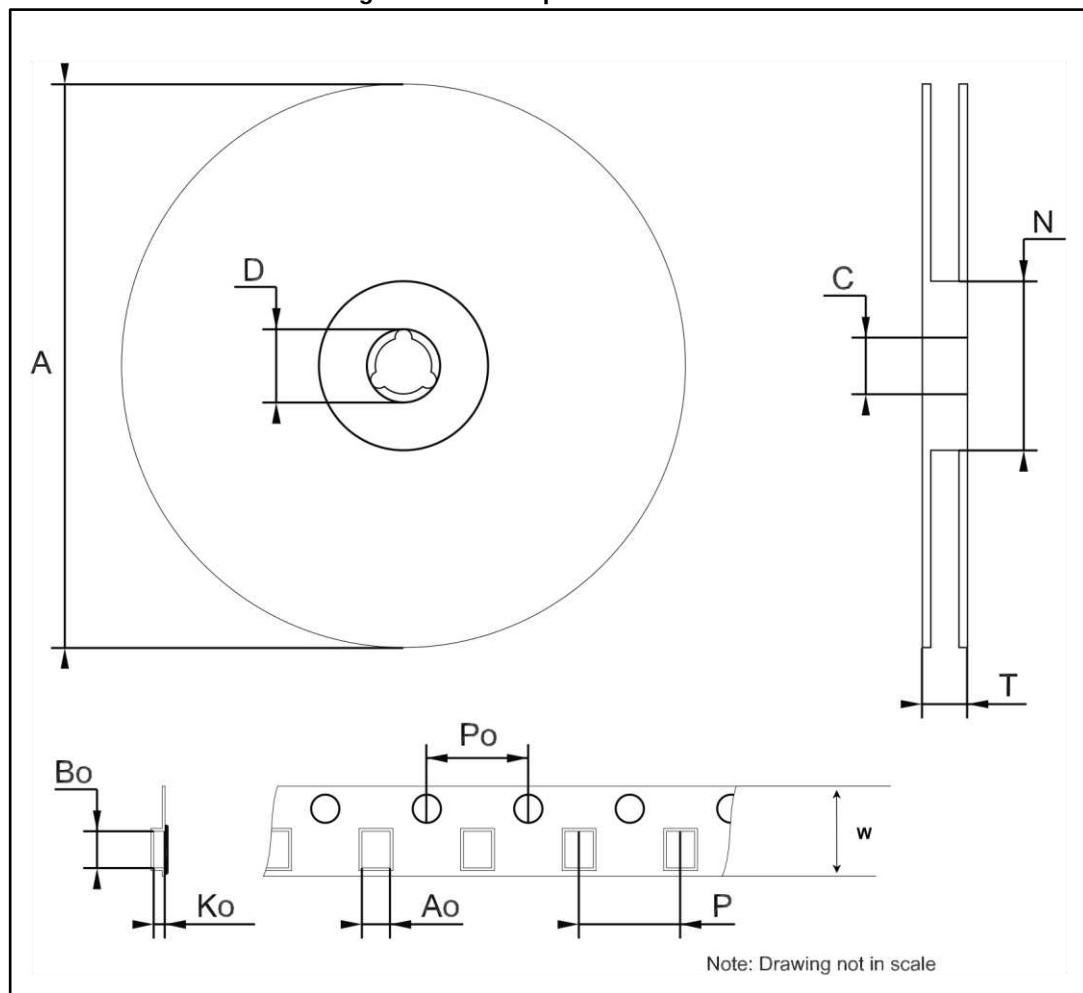


Table 8: SO-8 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A			330
C	12.8		13.2
D	20.2		
N	50		
T			22.4
Ao	6.4	6.5	6.6
Bo	5.2		5.4
Ko	2.1		2.3
Po	3.9		4.1
P	7.9		8.1
W	11.7	12.0	12.3

## 7.5 TO-92 package information

Figure 31: TO-92 package outline

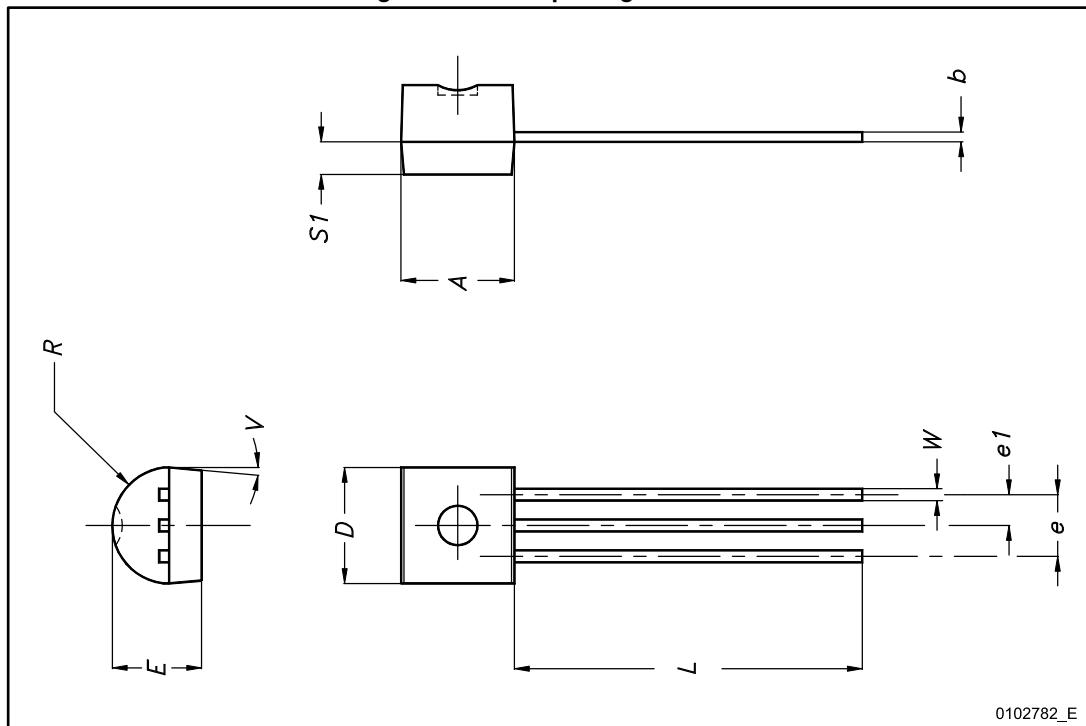


Table 9: TO-92 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.32		4.95
b	0.36		0.51
D	4.45		4.95
E	3.30		3.94
e	2.41		2.67
e1	1.14		1.40
L	12.70		15.49
R	2.16		2.41
S1	0.92		1.52
W	0.41		0.56
V		5°	

## 8 Ordering information

Table 10: Order code

DPAK		TO-92 (bag)	SO-8	Output voltages
AG	Standard			
LM2931ADT33RY <sup>(1)</sup>			LM2931AD33R	3.3 V
LM2931ADT50RY <sup>(1)</sup>	LM2931ADT50R	LM2931AZ50R	LM2931AD50R	5.0 V
			LM2931D-R	2.5 to 26 V

**Notes:**

<sup>(1)</sup>Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q002 or equivalent.

## 9 Revision history

**Table 11: Document revision history**

Date	Revision	Changes
21-Jun-2004	12	Document updated.
16-Jun-2006	13	Order codes updated.
27-Jul-2007	14	Added <i>Table 1</i> in cover page.
21-Aug-2007	15	Added root part number - (see <i>Table 1</i> ).
22-Nov-2007	16	Modified: <i>Table 1</i> .
11-Feb-2008	17	Modified: <i>Table 1 on page 1</i> .
10-Jul-2008	18	Removed package TO-220, modified <i>Table 1 on page 1</i> .
26-May-2010	19	Modified: V <sub>I</sub> values <i>Table 4 on page 6</i> , <i>Table 5 on page 7</i> and <i>Table 6 on page 8</i> .
02-Nov-2011	20	Modified: <i>Figure 4 on page 6</i> . Added: (*) ADJ pin on the Adjustable version, Not Connected in the fixed output version. on page 4 and Inhibit pin: regulator is enabled when VINH < 1.2 V , disabled when VINH > 3.25 V on page 6.
09-Apr-2014	21	Part numbers LM2931XX, LM2931AXX33 and LM2931AXX50 changed to LM2931. Updated the description in cover page <i>Section 2: Pin configuration</i> and <i>Section 7: Package information</i> . Added <i>Section 8: Revision history</i> . Minor text changes.
16-Mar-2017	22	Updated features in cover page, removed Table 1. Device summary from cover page, <a href="#">Table 3: "Electrical characteristics of LM2931A33/LM2931A33Y"</a> , <a href="#">Table 4: "Electrical characteristics of LM2931A50/ LM2931A50Y"</a> and <a href="#">Table 5: "Electrical characteristics of LM2931 (adjustable version)"</a> . Updated <i>Section 7: "Package information"</i> . Added <i>Section 8: "Ordering information"</i> . Minor text changes.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved