



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



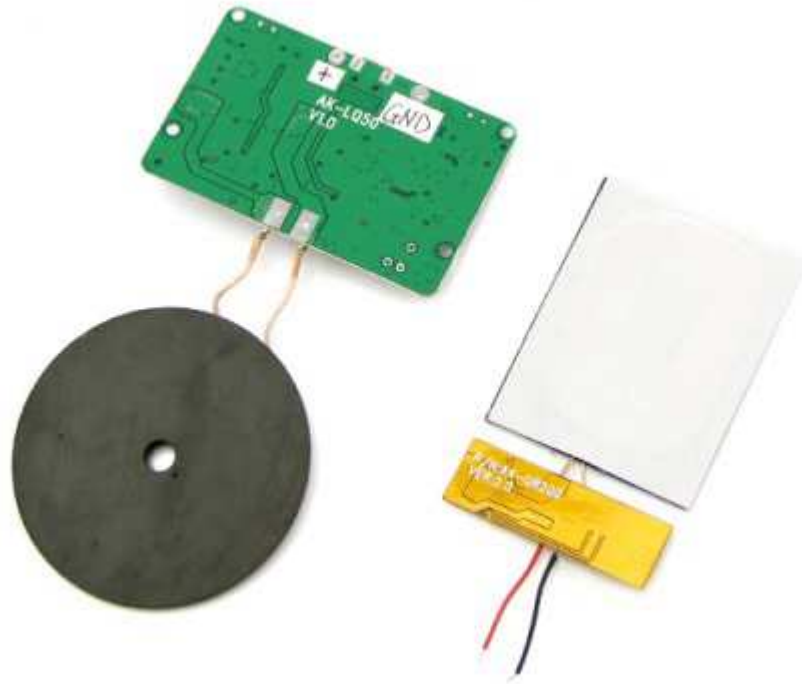

(images/product/QI Wireless Charging Module Kit_04.jpg)

QI Wireless Charging Module Kit - 5V/1A

SKU: 114990025



WIO LINK is LIVE at Kickstarter!

(https://www.kickstarter.com/projects/seeed/wio-link-3-steps-5-minutes-build-your-iot-applicat/description?ref=banner_depot)

Description

This is a pair of wireless charging kit including transmitter and receiver. The transmitter is a build-in wireless charging module of mobile phone wireless charger, it fits wireless charging

standard set by the WPC, compatible with most wireless charging mobile devices on market such as LG Nexus 4/5, Lumia920. High output current capability up to 1A at 5V. The receiver consists of a FPCB and a sticking antenna, it features only 1.2mm thick. It have been used as wireless charging case for mobile phone.

Features:

Qi-marked Product, Fit wireless Charging Standard Set by The WPC

- 3C and Qi Wireless Charging Standard Qualified
- Light Indicator to Show The Status of charging
- High Power Transform Efficiency

Specification:

- TX Input Voltage: DC 5V
- TX Input Current: 1 - 2A
- TX Output Voltage: DC 5V
- TX Output Current: Max.1A
- TX PCBA Dimensions: 55 x 35 x 3.5mm
- TX Coil Dimensions: 43(diameter) x 2.2mm
- TX Magnetic Sheet: 55(diameter) x 1mm
- RX Output: DC 5V
- RX Output Current: Max.600mA
- RX FPCB Dimensions: 36 x 12 x 1.2mm
- RX Antenna Dimensions: 46 x 36 x 1mm
- Charging Distance: 2 - 6mm
- Working Frequency: <200Khz
- Transfer Efficiency: Max.73%
- Operating temperature: -40 - 40°C

Overview



(<http://www.seeedstudio.com/depot/Shenzhen-2U-t-11.html?ref=pinfo>)

Designer:

Others

Other

Products

From This Designer (<http://www.seeedstudio.com/depot/Others-m-24.html?ref=pinfo>)

Weight: 27 g