



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



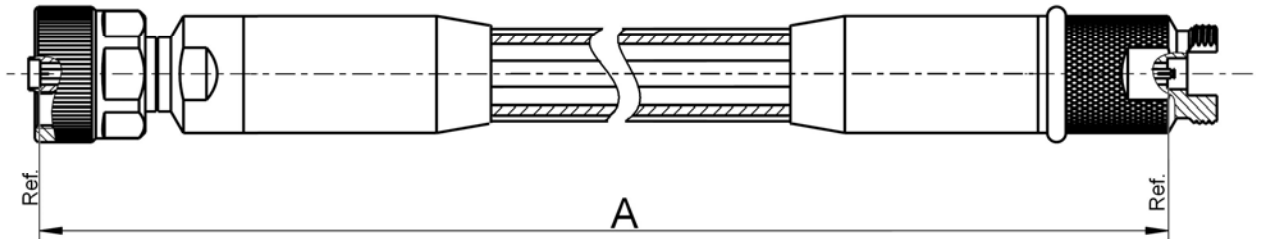

All dimensions are in mm; tolerances according to ISO 2768 c-H

**Available variants**

Type	Length "A" (mm)	Insertion loss ≤ (dB) at 26.5 GHz	Weight (g) / pce
LU7-035-800	800	1.90	400
LU7-035-600	600	1.50	350

**Documents**

Technical data sheet connector left	RPC-3.50 ruggedized jack	03KR123-2U7S3
Technical data sheet connector right	RPC-SL 26.5 GHz jack	04K123-2U7S3
Technical data sheet cable	RTK 162	

**Assembly parts**

Connector left	RPC-3.50 ruggedized jack	03KR123-2U7S3
Connector right	RPC-SL 26.5 GHz jack	04K123-2U7S3
Cable	RTK 162	
Armour	Metal tubing with fixed bending rate and protection braid	

**Electrical data**

Impedance	50 Ω
Frequency	DC to 26.5 GHz
Return loss	≥ 26 dB, DC to 4 GHz ≥ 20 dB, 4 GHz to 26.5 GHz
Insertion loss	see table available variants
Phase deviation:	
After 90° bending	≤ 1.0°, DC to 4 GHz ≤ 3.0°, 4 GHz to 26.5 GHz
Straight after 3x90° bending	≤ 0.5°, DC to 4 GHz ≤ 1.5°, 4 GHz to 26.5 GHz
Amplitude stability	≤ 0.03 dB, DC to 4 GHz ≤ 0.05 dB, 4 GHz to 26.5 GHz
Return loss stability	≥ 48 dB, DC to 4 GHz ≥ 40 dB, 4 GHz to 26.5 GHz
RF-leakage	≥ 100 dB up to 1 GHz

**Mechanical data**

Minimum bend radius	60 mm
---------------------	-------

**Environmental data**

Temperature range	-40°C to +85°C
2002/95/EC (RoHS)	compliant

**Packing**

Standard	1 pce in box
----------	--------------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	15/02/06	Frank Tatzel	29/04/10	e00	11-0169	Krautenbacher J.	28/02/11
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany <a href="http://www.rosenberger.de">www.rosenberger.de</a>					Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: <a href="mailto:info@rosenberger.de">info@rosenberger.de</a>		Page 2 / 2