



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Technical Data Sheet

# Rosenberger

Cable assembly  
SMA Plug / SMA Plug – RTK 162

## LU7-071-XXX

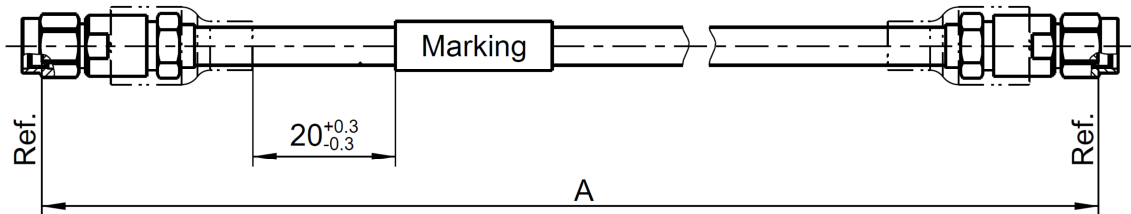

All dimensions are in mm; tolerances:  $\pm 3\text{mm}$  for  $A \leq 300\text{ mm}$ ;  $\pm 1\%$  for  $A > 300\text{ mm}$

### Available variants

Type	max. Insertion loss at 18 GHz	Marking	Weight (g) / pce
LU7-071-XXX	$\leq 0.00164\text{ dB/mm} * A\text{ mm} + 0.4\text{ dB}$	ROSENBERGER YYYY-WW LU7-071-XXX FAC-RRRRRRR ssss	$0.066\text{ g/mm} * A\text{ mm} + 12\text{ g}$

XXX – length in mm = A  
WW – week      YYYY – year      ssss – serial no.      FAC – Factory Code      RRRRRRR – lot nr.

Note: max. Insertion Loss:  
First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:  
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

### Assembly parts

Connector left	SMA plug	32S121-2U7S3
Connector right	SMA plug	32S121-2U7S3
Cable	RTK 162	

### Electrical data

Impedance	50 $\Omega$
Frequency	DC to 18 GHz
Return loss <sup>1</sup>	$\geq 19\text{ dB}$ , DC to 18 GHz
Insertion loss <sup>1</sup>	see table available variants
RF-leakage	$\geq 100\text{ dB}$ up to 1 GHz

<sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

### Mechanical data

Minimum bend radius:	
Single	9.65 mm
Multiple	50.8 mm

### Environmental data

Temperature range	-40°C to +85°C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Reiner	18.01.16	Herbert Babinger	22.01.16	b00	16-s045	A. Youmsi Mouafo	22.01.16

Rosenberger Hochfrequenztechnik GmbH & Co. KG  
P.O.Box 1260 D-84526 Tittmoning Germany  
[www.rosenberger.de](http://www.rosenberger.de)

Tel. : +49 8684 18-0  
Email : [info@rosenberger.de](mailto:info@rosenberger.de)

Page  
1 / 1