

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE, RFS. 2063, DMR	08/12/04	BS						
В	UPDATE FORMAT, RFS. 8146, BS	03/20/06	BS						
C	UPDATE RATING FROM 10A TO 13A, RFS. 9148, BS	08/16/06	BS						

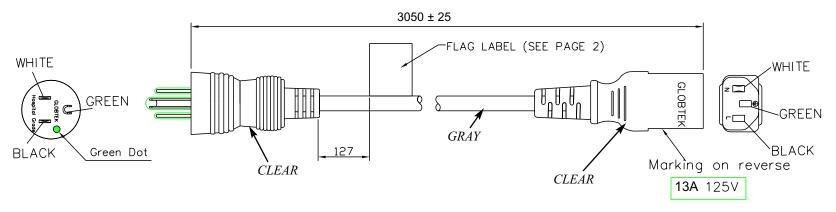

GENERAL SPECIFICATIONS:

RATING: 13A / 125V AC

CABLE TYPE / SIZE: SJT, 16 AWG X 3C, GRAY

TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: GRAY (GA001 SIMILAR TO PMS 423C)

OVERALL LENGTH (L): 3050 + 25 MM CABLE OUTER DIAMETER: $8.5 + 0.15 \, MM$


END 'A' TERMINATION: MEDICAL GRADE NEMA 5-15P, CLEAR

END 'B' TERMINATION: IEC 320 / C13. CLEAR

APPROVALS PLUG: UL, CSA or cUL APPROVALS CABLE: UL, CSA or cUL

PACKING:

HANKING







NOTES:

Contents of this document

prior notice

are subject to change without

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





R	

Foot Note:
Globtek Inc. will not be liable for the
safety and performance of these power
product if unauthorized access and repair
occurs. End user should consult the applica-
ble UL,CSA or EN Standards for proper
installation instruction.


Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

NO.	PART NO	REV.		DESCRIPTION	NOTES			
TABULATION BLOCK								
		TOLERA DECIMALS .xx +/- 0.1 .xxx +/005	ANGULAR +/- 1°	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Nor Tel. 201-784-1000				
INIT.BY: BS	DATE: 03/20/06	MILLIMETERS .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TITLE: MEDICAL GRADE NORTH AMERICAN DE CORDSET	TACHABLE			
DRAWN: NF	DATE: 03/20/06	FSCN No.: G, CC, YL	SIZE A		REV. C			
APRVD: DMR	DATE: 03/20/06	SCALE: NONE		PART NO: 11910510F0701-GYL(R)	SHEET 1 / 2			

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

LABEL

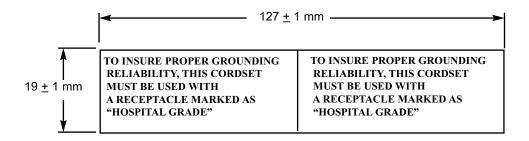

NOTES:

- 1. PERMANENTLY ATTACHED FLAG LABEL.
- 2. BASE MATERIAL: WHITE POLYVINYL CHLORIDE, 0.05 mm THICK WITH PERMANENT, PRESSURE SENSITIVE ADHESIVE ON ONE SIDE.
- 3. PRINTING: TEXT IS PRINTED IN PERMANENT BLACK INK, LETTER HEIGHT IS 2.6 mm MINIMUM.

