



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Features

- Linear Gain: 20 dB
- Saturated Output Power: +39 dBm Pulsed
- 50  $\Omega$  Input / Output Match
- Lead-Free 5 mm 20-lead PQFN Package
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible


## Description

The MAAP-011027 is a 2-stage, 8 W saturated C-band power amplifier in a 5 mm 20 lead PQFN package, allowing for easy assembly. This product is fully matched to 50 ohms on both the input and output. It can be used as a power amplifier stage or as a driver stage in high power pulsed applications.

It is ideally suited for Point-to-Point Radios and C-band radar applications.

Each device is 100% RF tested to ensure performance compliance.

## Functional Schematic

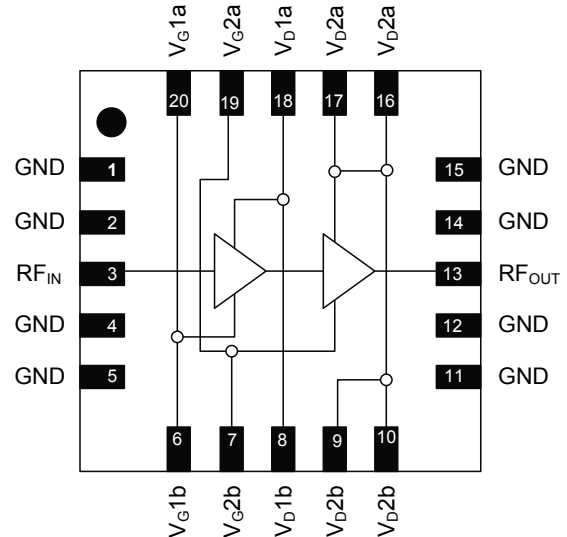

## Pin Configuration<sup>2</sup>

Pin No.	Function	Pin No.	Function
1	Ground	11	Ground
2	Ground	12	Ground
3	RF <sub>IN</sub>	13	RF <sub>OUT</sub>
4	Ground	14	Ground
5	Ground	15	Ground
6	V <sub>G1b</sub>	16	V <sub>D2a</sub>
7	V <sub>G2b</sub>	17	V <sub>D2a</sub>
8	V <sub>D1b</sub>	18	V <sub>D1a</sub>
9	V <sub>D2b</sub>	19	V <sub>G2a</sub>
10	V <sub>D2b</sub>	20	V <sub>G1a</sub>
		21	Paddle <sup>3</sup>

2. MACOM recommends connecting unused package pins to ground.
3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

## Ordering Information<sup>1</sup>

Part Number	Package
MAAP-011027-TR0500	500 piece reel
MAAP-011027-TR1000	1000 piece reel
MAAP-011027-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Electrical Specifications:

**Freq. 5.2 - 5.9 GHz,  $V_{DD} = 9\text{ V}$  Pulsed, 100  $\mu\text{s}$  Pulse Width, 10% Duty Cycle,  $Z_0 = 50\ \Omega$**

Parameter	Units	Min.	Typ.	Max.
Gain	dB	17	20	—
Input Return Loss	dB	—	10	—
Output Return Loss	dB	—	10	—
$P_{SAT}$	dBm	37	39	—
Pulse Period	$\mu\text{s}$	—	100	—
Pulse Duty Cycle	%	—	10	—
Efficiency	%	—	37	—
Small Signal Current	A	—	1	—

## Maximum Operating Ratings<sup>4,5,6</sup>

Parameter	Absolute Maximum
Input Power	+28 dBm
Supply Voltage	+11 V
Operating Temperature	-40°C to +85°C
Junction Temperature <sup>7</sup>	+150 °C
Storage Temperature	-55°C to +150°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.
6. Operating at nominal conditions with  $T_J \leq +150^\circ\text{C}$  will ensure  $MTTF > 1 \times 10^6$  hours.
7. Junction Temperature ( $T_J$ ) =  $T_C + \Theta_{JC} * (V * I)$   
Typical CW thermal resistance ( $\Theta_{JC}$ ) = 7.7°C/W


## Handling Procedures

Please observe the following precautions to avoid damage:


## Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these class 1A devices.

## Schematic

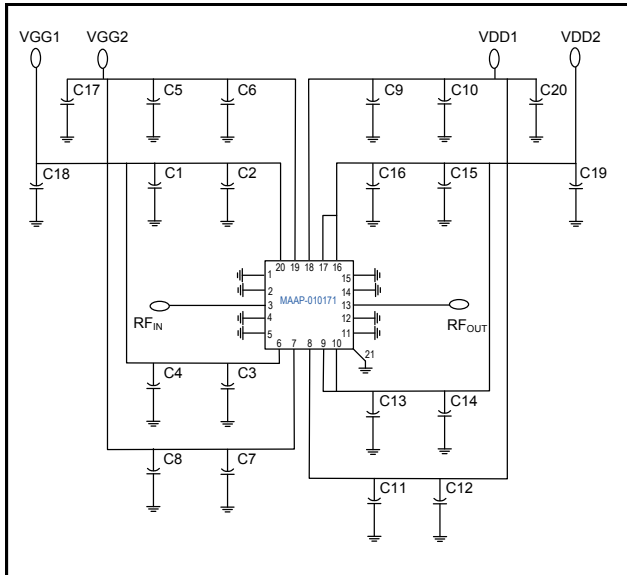

## Recommended PCB Layout

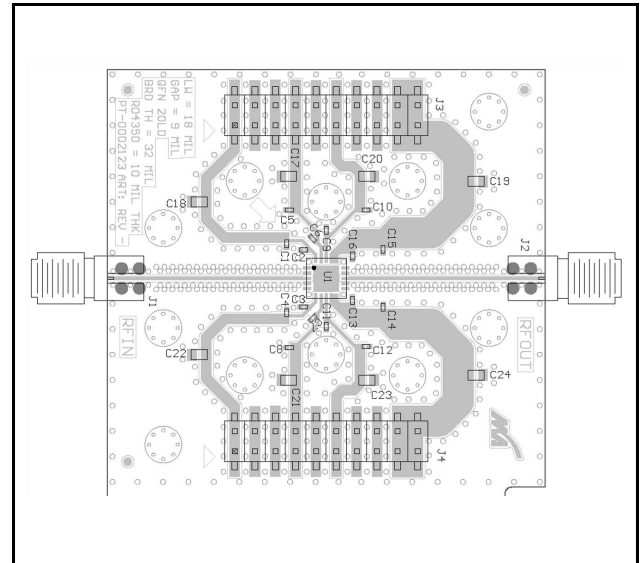

## Parts List

Component	Value	Package
C2, C3, C5, C7, C9, C11, C13, C16	100 pF	0402
C1, C4, C6, C8, C10, C12, C14, C15	1000 pF	0402
C17, C18, C21, C22	1 $\mu$ F	0805
C19, C20, C23, C24	10 nF	0805


## Operating the MAAP-011027

To operate the MAAP-011027, follow these steps. Ramp down or shut down in reverse order.


1. Apply  $V_G$  between -1 V and -0.5 V to set  $IDQ$  to 1 A
2. Apply RF Power ON
3. Apply  $V_{DD}$  Pulsed

## Typical Performance Curves over Temperature


**Gain**

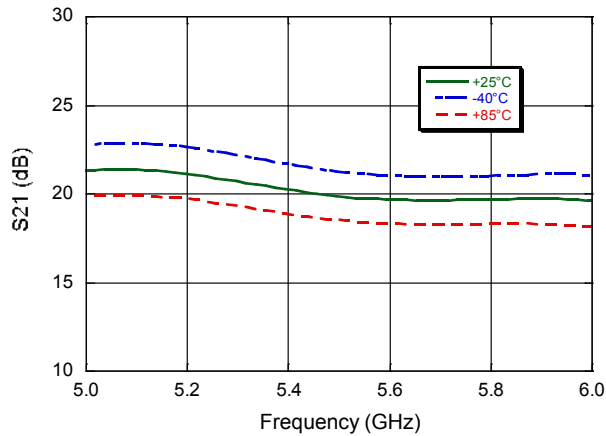


**Reverse Isolation**

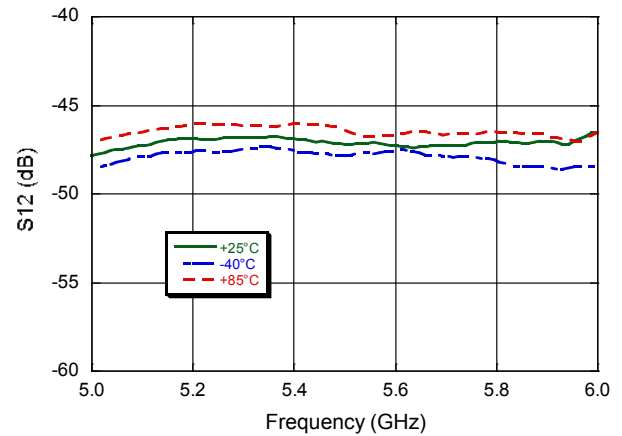


**Input Return Loss**

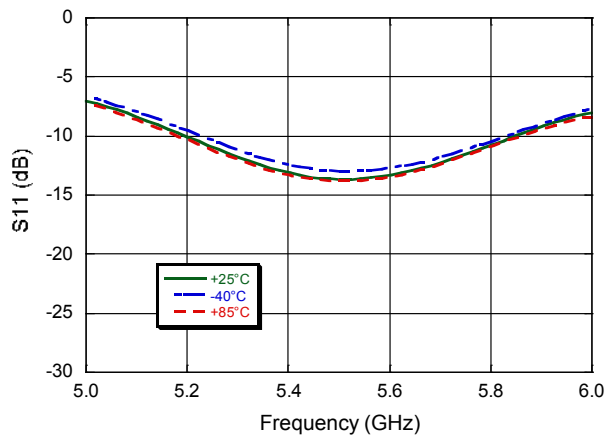


**Output Return Loss**

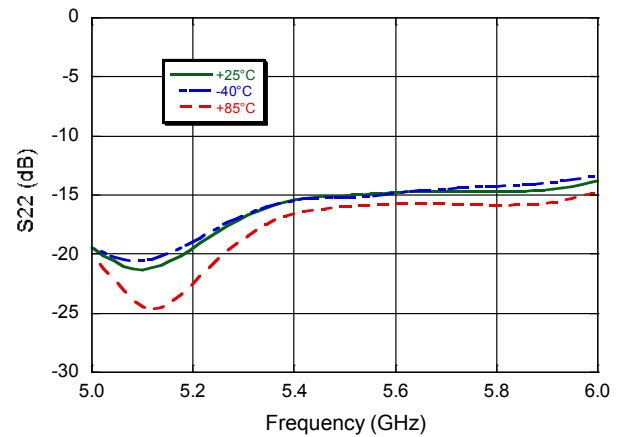

**Output Power**

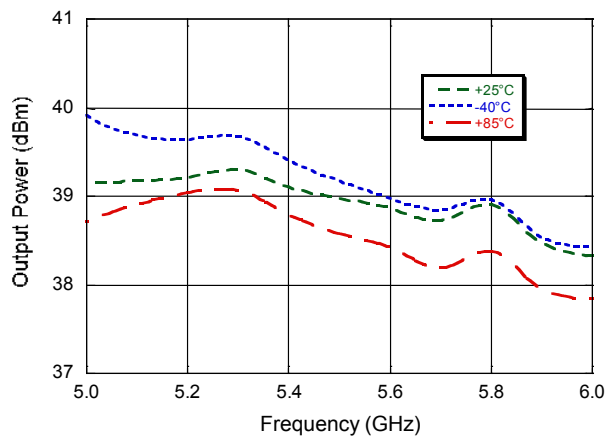


**Power Added Efficiency**

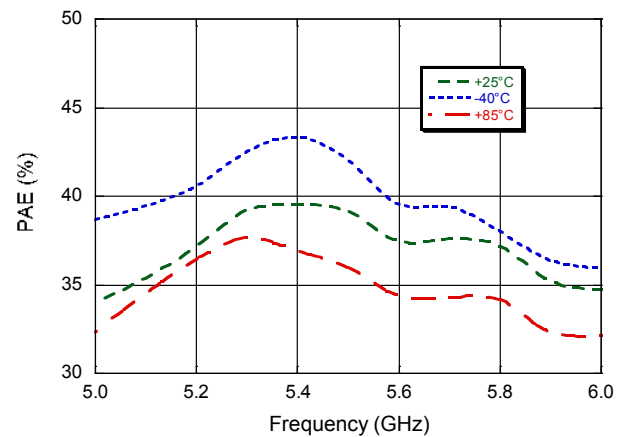


## Typical Performance Curves over Voltage


**Gain**

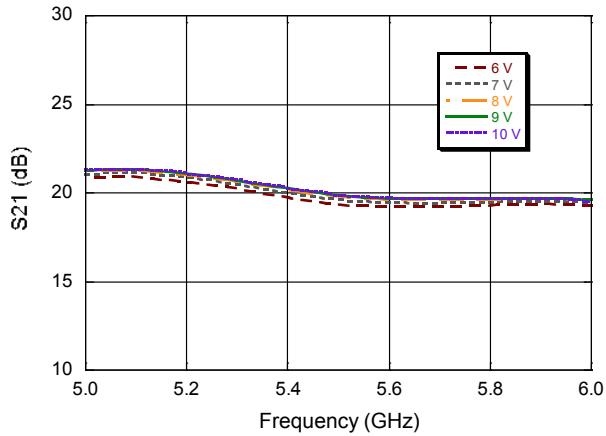


**Reverse Isolation**

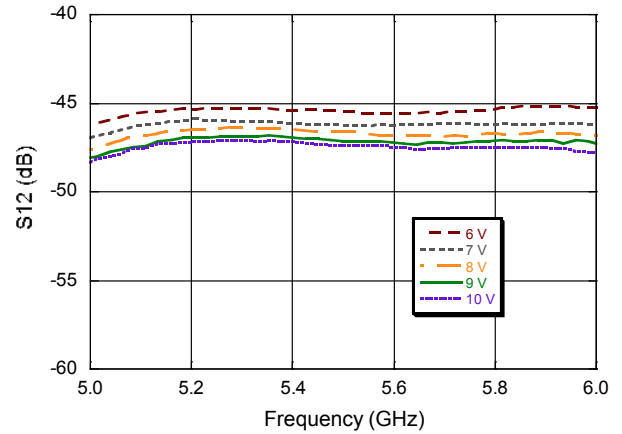


**Input Return Loss**

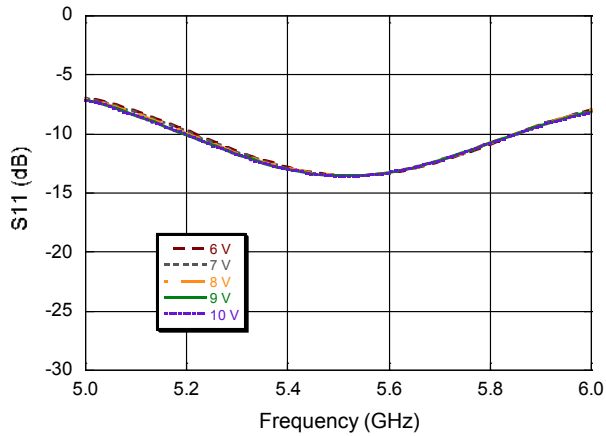


**Output Return Loss**

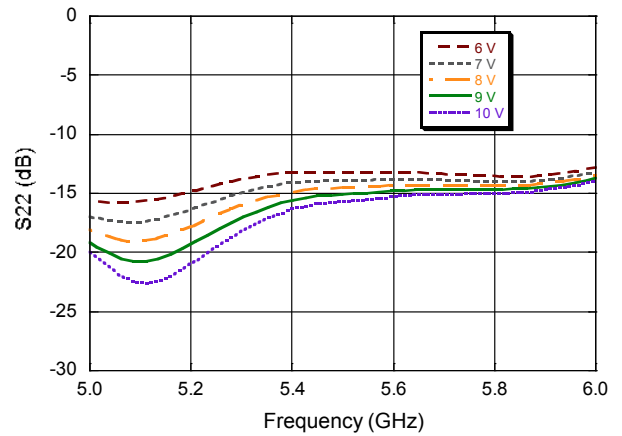

**Output Power**

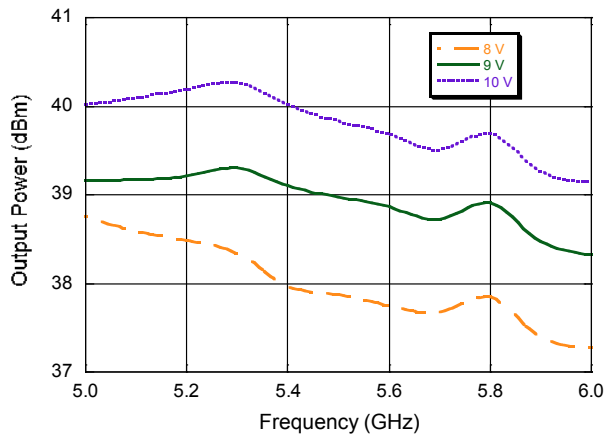


**Power Added Efficiency**

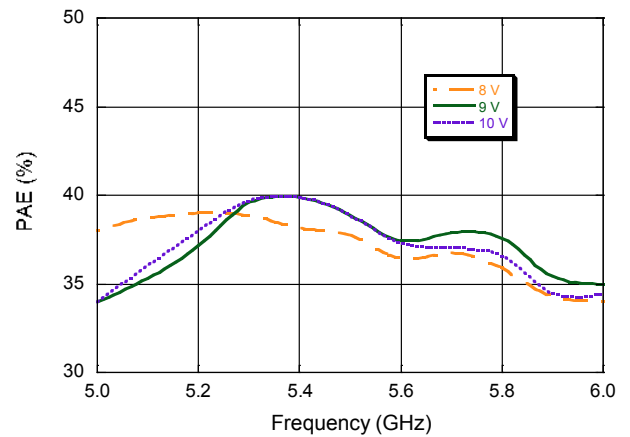


## Typical Performance Curves


**Power Gain vs. Input Power**

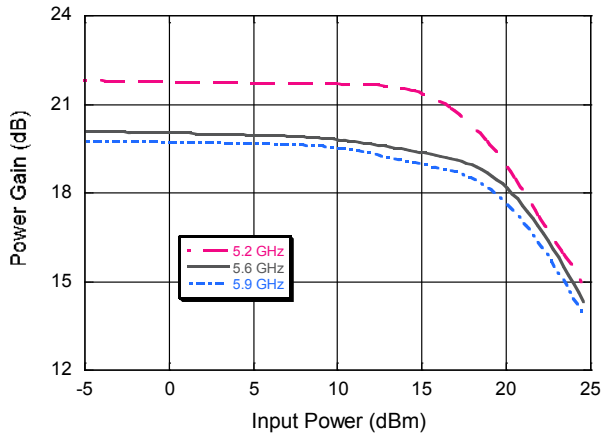


**Power Added Efficiency vs. Output Power**

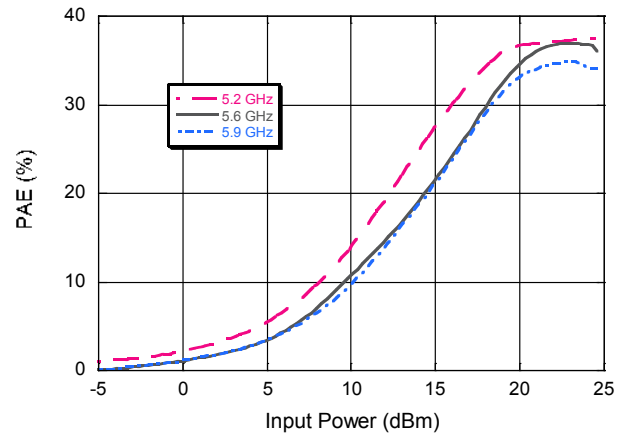


**Power Gain vs. Input Power @ 5.6 GHz**

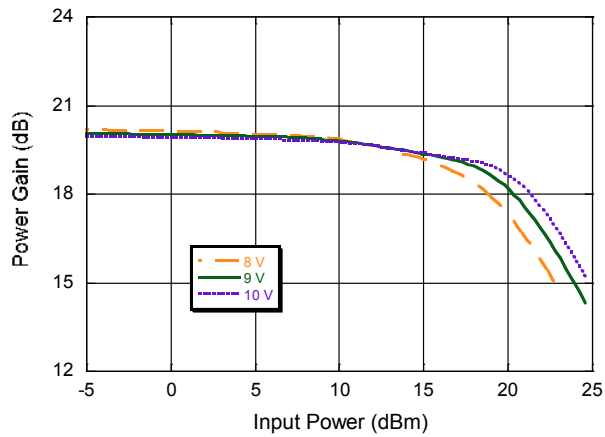


**Power Added Efficiency vs. Input Power @ 5.6 GHz**

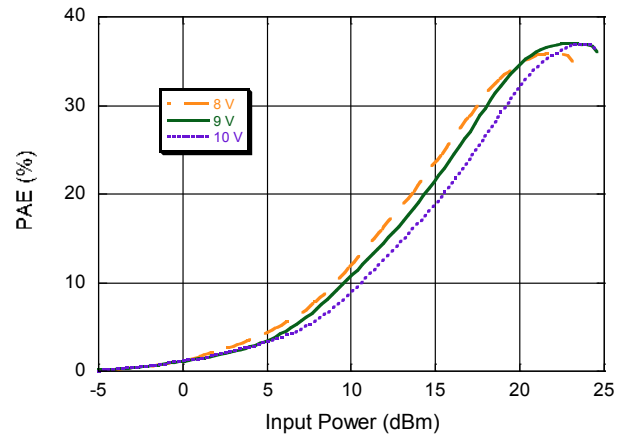

**Power Gain vs. Input Power @ 5.6 GHz**

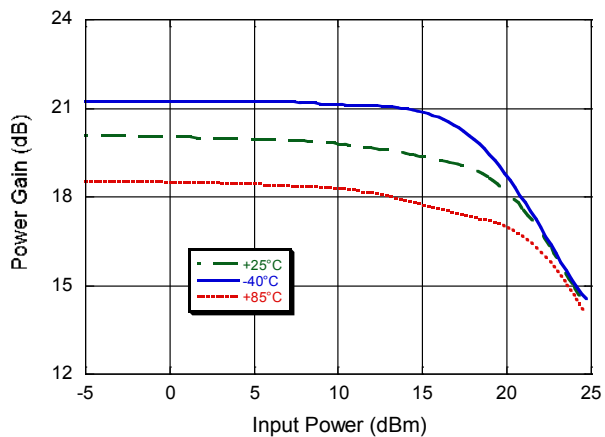


**Power Added Efficiency vs. Input Power @ 5.6 GHz**

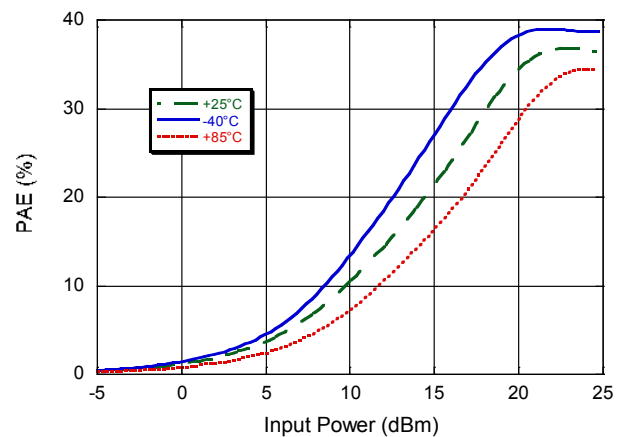


## Typical Performance Curves


### Small Signal wideband performance

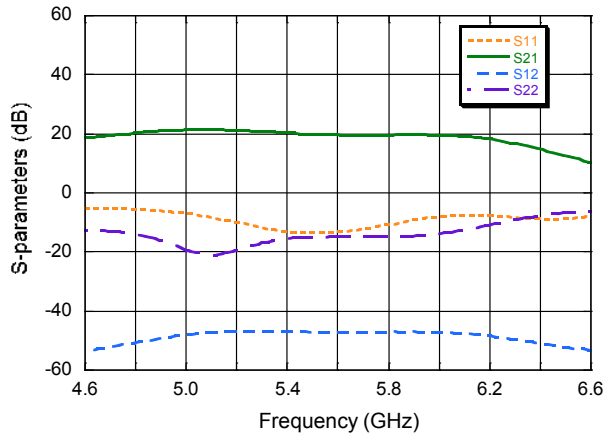


### Drain Current vs. Input Power @ $T = +25^{\circ}\text{C}$ , $F = 5.6\text{ GHz}$

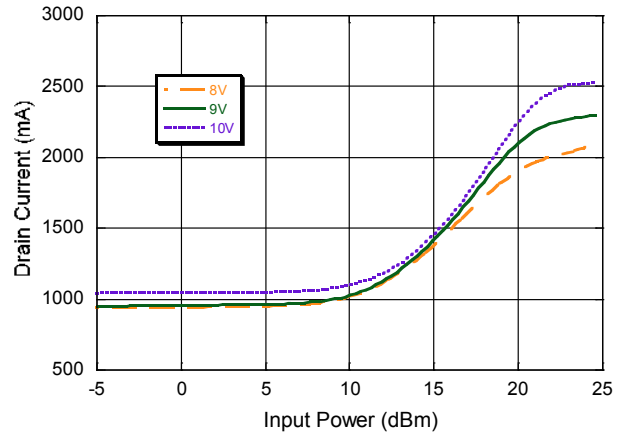


### Power Dissipation<sup>8</sup> vs. Case Temperature<sup>9,10</sup>

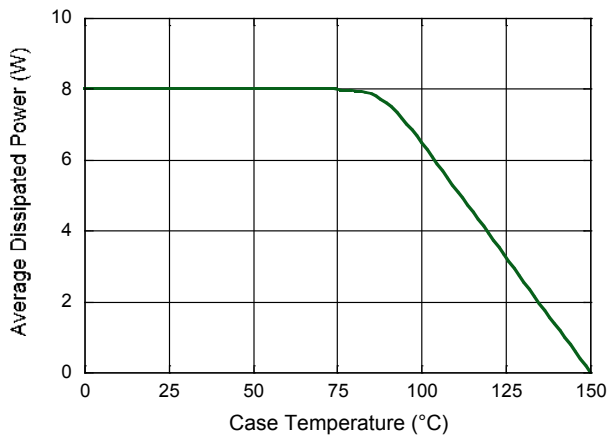

### Drain Current vs. Input Power @ $T = +25^{\circ}\text{C}$ , $V_d = 9\text{ V}$

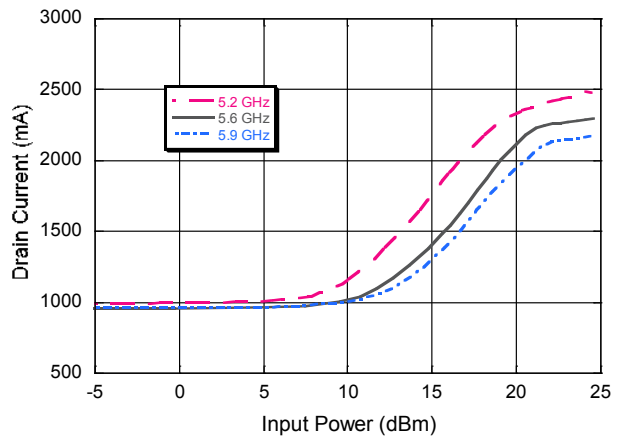


### Drain Current vs. Input Power @ $F = 5.6\text{ GHz}$ , $V_d = 9\text{ V}$

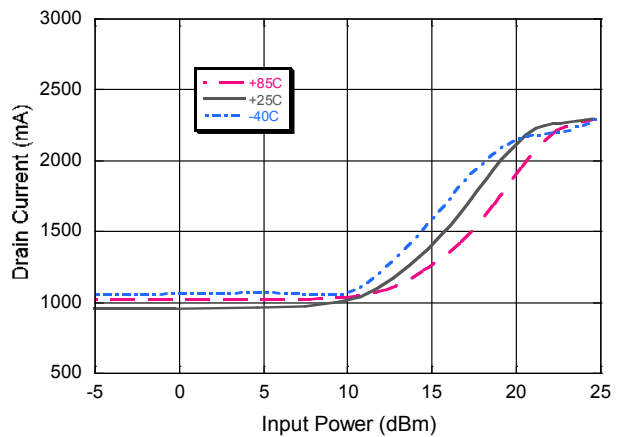

8. Average Dissipated power:  $P_{diss} = P_{dc} + P_{in} - P_{out}$  (all powers are average in Watts)
9. Average power is integrated over pulse period, for short pulses (not exceeding pulse width of 100  $\mu\text{s}$ ), average power can be approximated as  $P_{average} = P_{peak} \cdot D$ , where D is duty cycle.
10. For pulses wider than 100  $\mu\text{s}$  self heating during pulse reduces allowable average dissipated power.



## Lead-Free 5 mm 20-Lead PQFN<sup>†</sup>

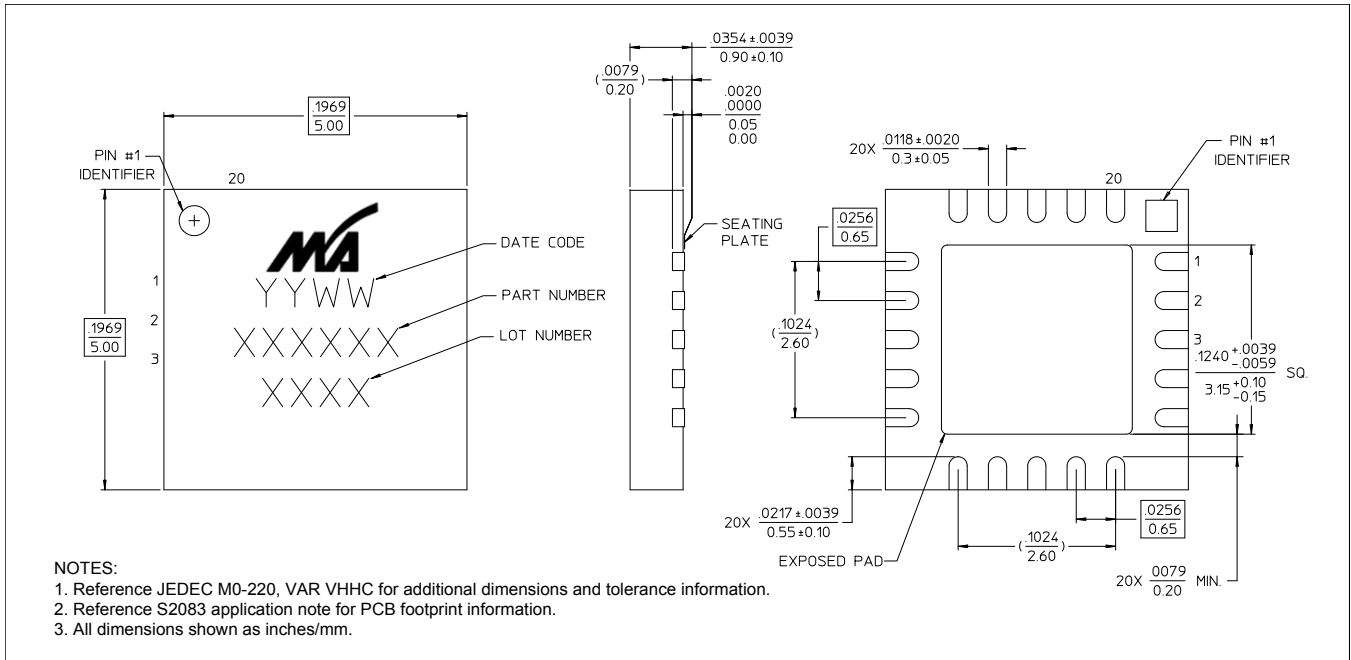

<sup>†</sup> Reference Application Note S2083 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is 100% matte tin over copper.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.