# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Single Driver for GaAs FET Switches and Attenuators

Rev. V3


МАСОМ

#### Features

- High Speed CMOS Technology
- Complementary Outputs
- Positive Voltage Control
- Low Power Dissipation
- Plastic SOIC Package for SMT Applications
- Tape and Reel Packaging Available
- Lead-Free SOIC-8 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS\* Compliant Version of DR65-0109

#### Description

M/A-COM's MADRCC0005 is a Single channel driver used to translate TTL control inputs into complementary gate voltages for GaAs FET microwave switches and attenuators. High speed analog CMOS technology is utilized to achieve low power dissipation at moderate to high speeds, encompassing most microwave switching applications.



#### **Pin Configuration**

Logic Diagram

Pin No.	Function			
1	V <sub>cc</sub>			
2	V <sub>IN</sub>			
3	GND			
4	GND			
5	GND			
6	Output A			
7	Output B			
8	V <sub>EE</sub>			

#### **Ordering Information**

Part Number	Package		
MADRCC0005	Bulk Packaging		
MADRCC0005TR	1000 piece reel		

Note: Reference Application Note M513 for reel size information.

#### **Guaranteed Operating Ranges**

Symbol	Parameter <sup>1</sup>	Unit	Min	Typical	Max
VCC	Positive DC Supply Voltage	V	4.5	5.0	5.5
V <sub>EE</sub>	Negative DC Supply Voltage	V	-5.5	-5.0	-4.5
V <sub>CC-</sub> V <sub>EE</sub>	Positive to Negative Supply Range	V	9.0	10.0	11.0
T <sub>A</sub>	Operating Ambient Temperature	°C	-40	+25	+85
I <sub>он</sub>	DC Output Current - HIGH	mA	—		-1.0
I <sub>OL</sub>	DC Output Current - LOW	mA	—	—	1.0
T <sub>rise</sub> , T <sub>fall</sub>	Maximum Input Rise or Fall Time	nS	—	—	500

1. All voltages are relative to GND

1

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.



Rev. V3


МАСОМ

Symbol	Parameter	Test Conditions		Units	Min	Тур	Max
VIH	Input HIGH Voltage	Guaranteed HIGH Input Voltage		V	2.0	_	-
VIL	Input LOW Voltage	Guaranteed LOW Input Voltage		V	-	_	0.8
V <sub>OH</sub>	Output HIGH Voltage	I <sub>он</sub> = -1 mA	V <sub>EE</sub> = Max	V	- 0.1	_	-
V <sub>OL</sub>	Output LOW Voltage	I <sub>OL</sub> = 1 mA	V <sub>EE</sub> = Max	V	_	_	V <sub>EE</sub> + 0.1
I <sub>IN</sub>	Input Leakage Current	$V_{IN} = V_{CC}$ or GND	V <sub>EE</sub> = Min	μA	-1.0	0	1.0
I <sub>CC</sub>	Quiescent Supply Current	V <sub>CC</sub> = Max	$V_{EE}$ = Min $V_{IN}$ = $V_{CC}$ or GND	μA	_	—	400
$T_{PHL}, T_{PLH}$	Propagation Delay	Guaranteed -40° C to + 85° C		nS	_	—	50
$T_{THL}, T_{TLH}$	Output Transition Time	Guaranteed -40° C to + 85° C		nS	—	—	25
	Delay Skew, Output A to Output B	Guaranteed -40° C to + 85° C		nS	—	—	8

#### AC & DC Characteristics Over Guaranteed Operating Range

See Switching Wave Forms for the definition of the switching terms. Supplies must be by-passed with .01  $\mu$ F Capacitors.

#### **Switching Waveforms**



#### **Handling Procedures**

Please observe the following precautions to avoid damage:

#### **Static Sensitivity**

Silicon Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

#### 2

### Absolute Maximum Ratings<sup>2,3</sup>

Parameter	Absolute Maximum		
V <sub>cc</sub>	5V to + 6.0 V		
V <sub>EE</sub>	- 6.0 V to5 V		
V <sub>CC</sub> - V <sub>EE</sub>	12 V		
V IN <sup>4</sup>	V <sub>CC</sub> + .5 V		
V <sub>OUT</sub>	V <sub>EE</sub> 5 V		
Storage Temperature	-65°C to +150°C		

2. Exceeding any one or combination of these limits may cause permanent damage to this device.

- 3. M/A-COM does not recommend sustained operation near these survivability limits.
- 4. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

#### **Truth Table**

Input	Outputs		
V <sub>IN</sub>	А	В	
0	V <sub>EE</sub>	GND	
1	GND	V <sub>EE</sub>	


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.



### Single Driver for GaAs FET Switches and Attenuators

Rev. V3

#### Lead-Free, SOIC-8<sup>†</sup>

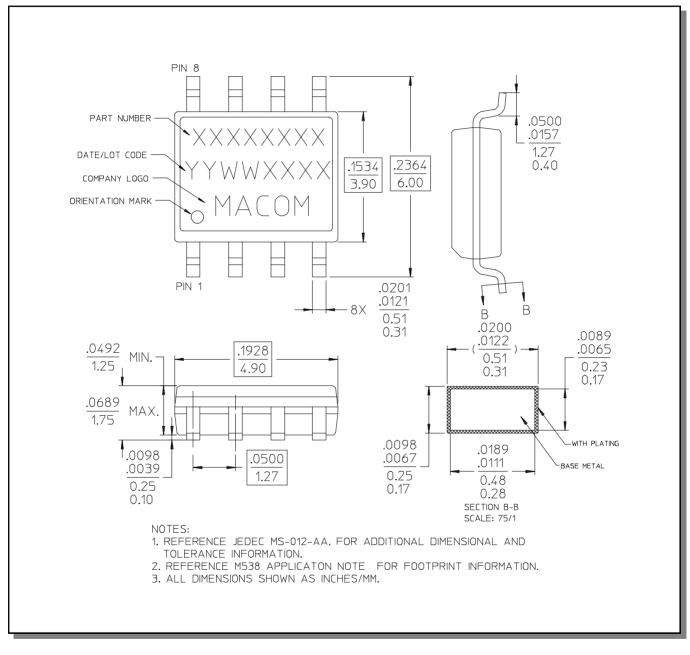

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.

<sup>3</sup> 

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.



#### Single Driver for GaAs FET Switches and Attenuators

Rev. V3

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

<sup>4</sup> 

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.