



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DATA SHEET



GaAs MULTI-CHIP MODULE MC-7846

870 MHz CATV 22 dB POWER DOUBLER AMPLIFIER

DESCRIPTION

The MC-7846 is a GaAs Multi-chip Module designed for use in CATV applications up to 870 MHz. This unit has low distortion, low noise figure and return loss across the entire frequency band.

Reliability and performance uniformity are assured by our stringent quality and control procedures.

FEATURES

- Low distortion
- High linear gain $G_L = 22.0 \text{ dB MIN. @ } f = 870 \text{ MHz}$
- Low return loss

<R> ORDERING INFORMATION

Part Number	Order Number	Package	Supplying Form
MC-7846	MC-7846-AZ	7-pin special with heatsink (Pb-Free)	25 pcs MAX./Tray

Remark To order evaluation samples, contact your nearby sales office.

Part number for sample order: MC-7846-AZ

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V_{DD}	30	V
Input Voltage ^{Note}	V_i	65.0	dBmV
Operating Case Temperature	T_C	-30 to +100	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +100	$^\circ\text{C}$

Note In case of single tone

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

RECOMMENDED OPERATING CONDITIONS ($Z_S = Z_L = 75 \Omega$)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	V_{DD}		23.5	24.0	24.5	V
Input Voltage	V_i	110 channel, 10 dB tilted across the band	–	32.0	35.0	dBmV
Operating Case Temperature	T_C		–30	+25	+85	°C

ELECTRICAL CHARACTERISTICS ($T_C = 30 \pm 5^\circ\text{C}$, $V_{DD} = 24 \text{ V}$, $Z_S = Z_L = 75 \Omega$)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Linear Gain	G_L	$f = 870 \text{ MHz}$	22.0	–	23.0	dB
Gain Slope	G_{Slope}	$f = 40 \text{ to } 870 \text{ MHz}$	0.6	1.0	1.4	dB
Gain Flatness	$G_{Flatness}$	$f = 40 \text{ to } 870 \text{ MHz}$, Peak to valley	–	–	0.6	dB
Noise Figure 1	NF1	$f = 50 \text{ MHz}$	–	–	6.0	dB
Noise Figure 2	NF2	$f = 870 \text{ MHz}$	–	–	6.5	dB
Operating Current	I_{DD}	RF OFF	275	–	375	mA
Composite Triple Beat	CTB	110 channel, $V_o = 50 \text{ dBmV}$ at 745.25 MHz, 10 dB tilted across the band	–	–	–60	dBc
Cross Modulation	XM		–	–	–55	dBc
Composite 2nd Order Beat	CSO		–	–	–63	dBc
Input Return Loss 1	RLi1	$f = 40 \text{ to } 160 \text{ MHz}$	20	–	–	dB
Input Return Loss 2	RLi2	$f = 160 \text{ to } 320 \text{ MHz}$	20	–	–	dB
Input Return Loss 3	RLi3	$f = 320 \text{ to } 640 \text{ MHz}$	19	–	–	dB
Input Return Loss 4	RLi4	$f = 640 \text{ to } 870 \text{ MHz}$	17	–	–	dB
Output Return Loss 1	RLo1	$f = 40 \text{ to } 160 \text{ MHz}$	20	–	–	dB
Output Return Loss 2	RLo2	$f = 160 \text{ to } 320 \text{ MHz}$	20	–	–	dB
Output Return Loss 3	RLo3	$f = 320 \text{ to } 640 \text{ MHz}$	19	–	–	dB
Output Return Loss 4	RLo4	$f = 640 \text{ to } 870 \text{ MHz}$	18	–	–	dB

PACKAGE DIMENSIONS

7-PIN SPECIAL WITH HEATSINK (UNIT: mm)

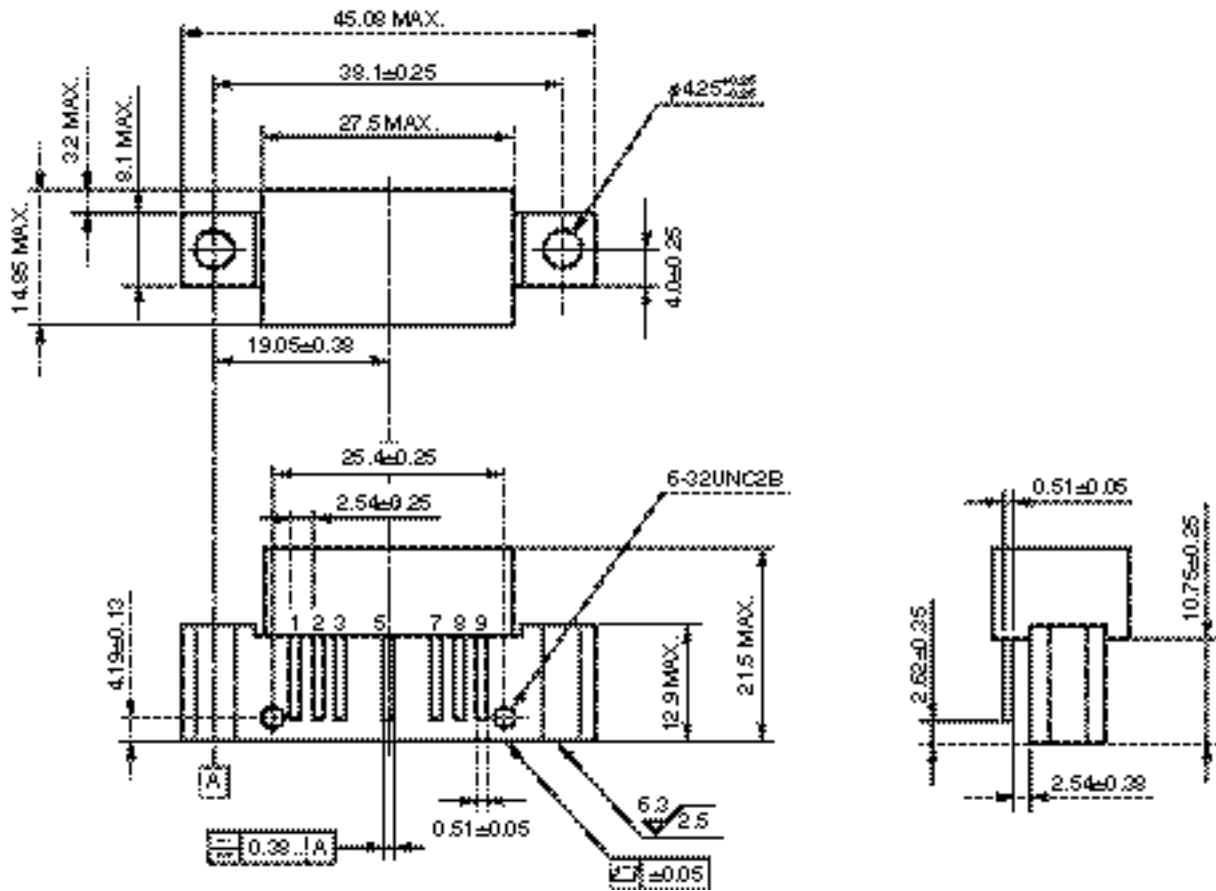

PIN CONNECTION

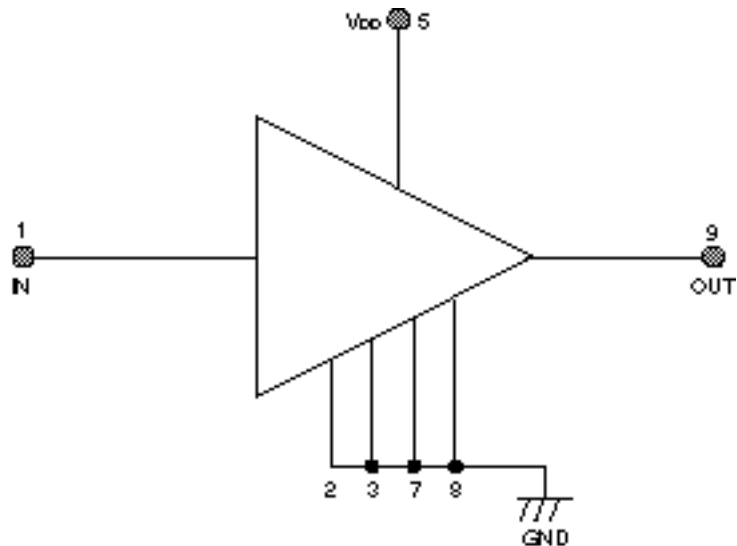

NOTE ON CORRECT USE

- (1) The space between PC board and root of the lead should be kept more than 1 mm to prevent undesired stress to the lead and also should be kept less than 4 mm to prevent undesired parasitic inductance. Recommended that space is 2.0 to 3.0 mm typical.
- (2) Recommended torque strength of the screw is 59 to 78 Ncm.
- (3) Form the ground pattern as wide as possible to minimize ground impedance.
(to prevent undesired oscillation)
All the ground pins must be connected together with wide ground pattern to decrease impedance difference.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered in the following recommended conditions. Other soldering methods and conditions than the recommended conditions are to be consulted with our sales representatives.

Soldering Method	Soldering Conditions	Condition Symbol
Pin Part Heating	Pin area temperature : less than 350°C ^{Note} Hour : Within 3 sec./pin	—

Note The point of pin part heating must be kept more than 1.2 mm distance from the root of lead.

<p>Caution</p>	<p>GaAs Products</p>	<p>This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.</p> <ul style="list-style-type: none"> • Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below. <ol style="list-style-type: none"> 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials. 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal. • Do not burn, destroy, cut, crush, or chemically dissolve the product. • Do not lick the product or in any way allow it to enter the mouth.
-----------------------	----------------------	---