



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FINISHED LENGTH (SEE TABLE)

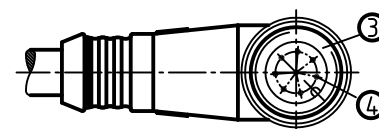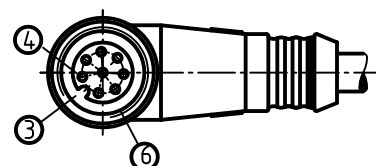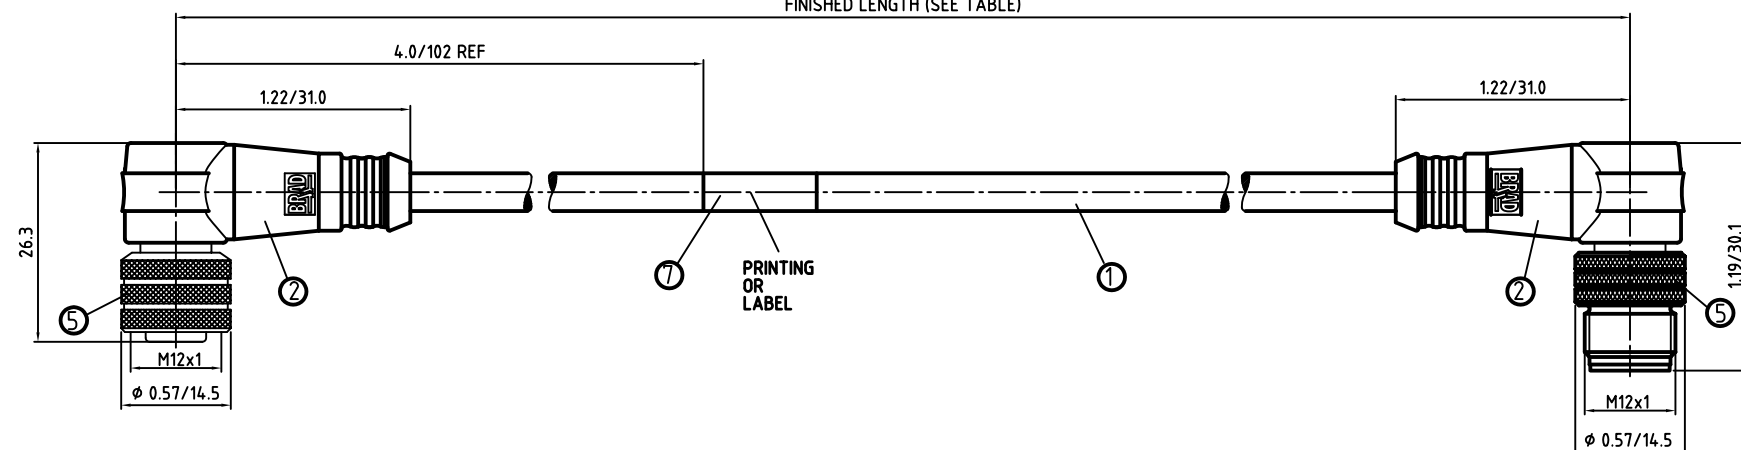

FEMALE FACE VIEW	
8-POLE	
	1 WHITE 2 BROWN 3 GREEN 4 YELLOW 5 GREY 6 PINK 7 BLUE 8 RED
WIRING DIAGRAM	




MALE FACE VIEW	
8-POLE	<p>1 WHITE 2 BROWN 3 GREEN 4 YELLOW 5 GREY 6 PINK 7 BLUE 8 RED</p>
 <p>A circular wiring diagram for an 8-pole motor. It features a central circle with eight radial lines extending to an outer ring. Each radial line is labeled with a number from 1 to 8. The numbers are arranged as follows: 1 at the top-left, 2 at the top-right, 3 at the right, 4 at the top-right (further out), 5 at the top, 6 at the top-left (further out), 7 at the left, and 8 at the bottom-left. The diagram is enclosed in a rectangular frame.</p>	
WIRING DIAGRAM	

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
8	1200660479	888033P02M010	1.0M +55.6 -0 [3.27' +2.19" -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30 VAC/36 VDC
AMPERAGE RATING	2 AMPS
PROTECTION CLASS	IP68
OPERATING TEMPERATURE	-30°C TO 80°C
UL CERTIFICATIONS	NOT APPLICABLE
CSA CERTIFICATIONS	NOT APPLICABLE

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	TEFLON/NICKEL
4	SOCKET/PIN CONTACT	BRASS GOLD	CuZn Ni/Au
3	INSERT	PUR	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	BLACK
1	CABLE- 0.25 ² /24 AWG (COPPER STRANDING) 8 CONDUCT. 300V	JACKET: PUR/PVC INSUL.: POLYPROP	JACKET: BLACK

DESCRIPTION EC NO: WEU2010-0325 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 2010/02/03 2010/02/03 2010/02/04		DESCRIPTION 1	REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				 = 0  = 0		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/03	MICRO-CHANGE CORDSET 8 POL. FE 90/ MA 90 24/8 BLACK PUR/PVC CABLE			
					4 PLACES	± ---	± ---	CHECKED BY RE	DATE 2010/02/04				
					3 PLACES	± ---	± ---	APPROVED BY FPACHER	DATE 2010/02/04				
					2 PLACES	± ---	± .01	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120066-035		SHEET NO. 1 OF 1	
1 PLACE	± 0.3	± ---											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								