



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



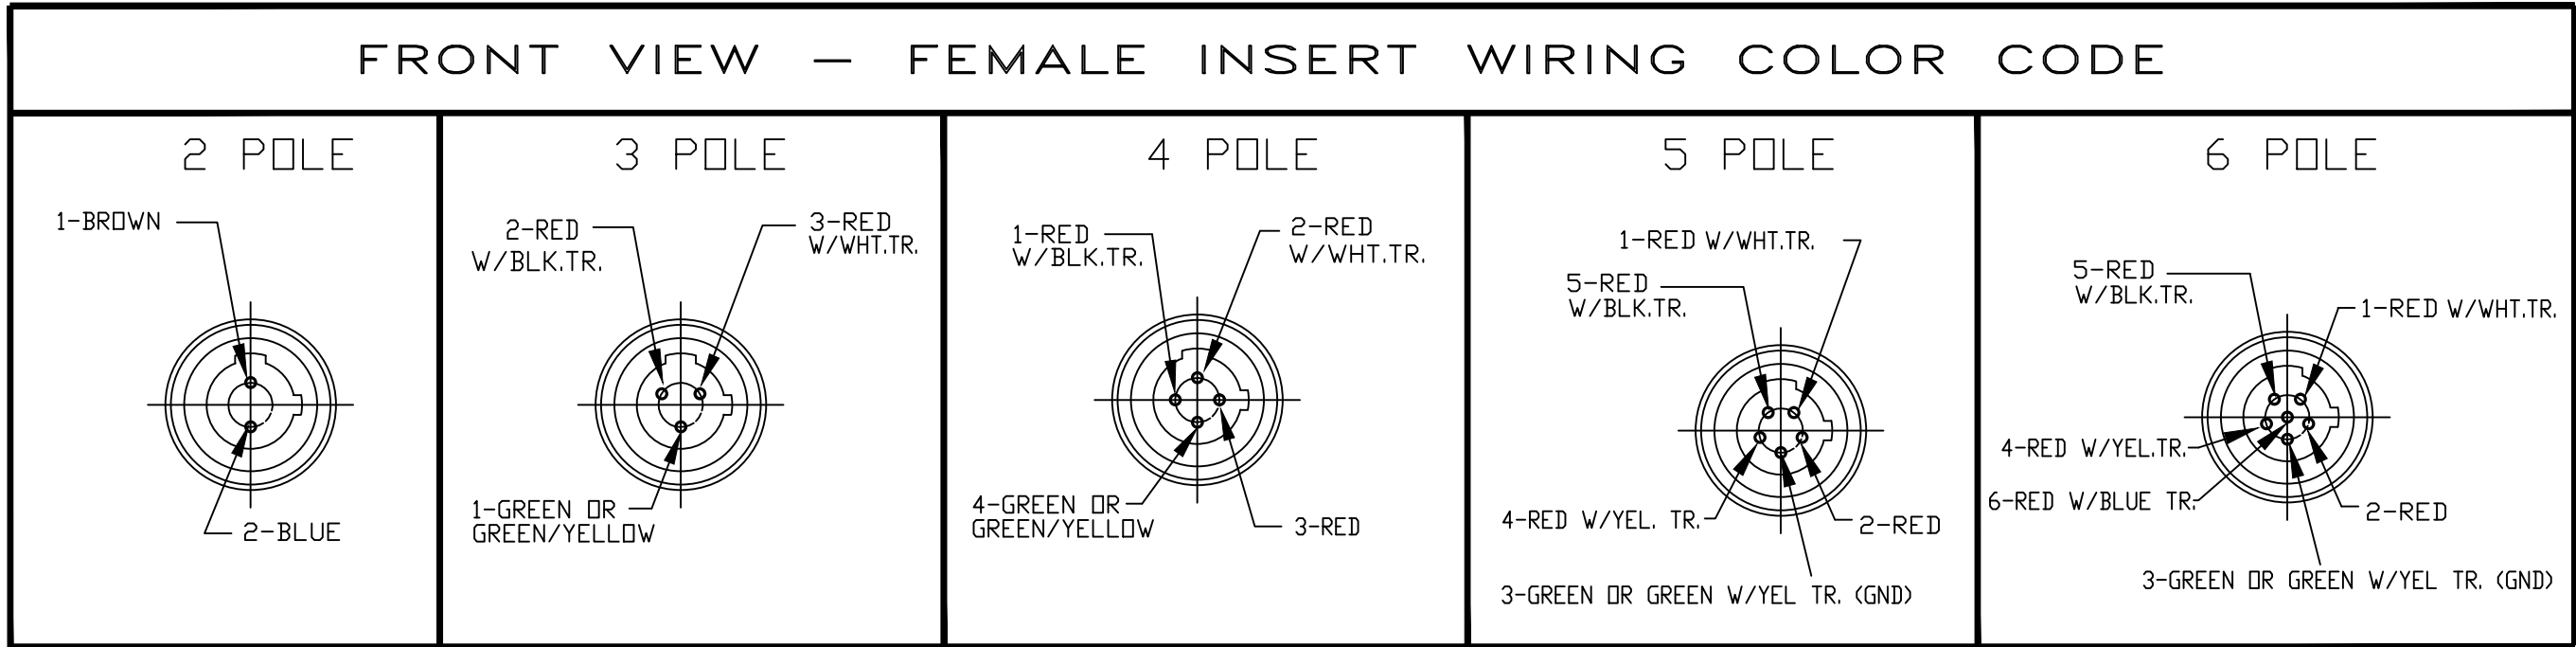

CABLE LENGTH TOLERANCES		
>.3M [1FT]:	+19mm-0	[+.75in-0]
.3 - .9M [1 - 3FT]:	+44.5mm-0	[+1.75in-0]
.9 - 1.8M [3 - 6FT]:	+55.6mm-0	[+2.19in-0]
1.8 - 3.7M [6 - 12FT]:	+88.9mm-0	[+3.50in-0]
3.7 - 7.3M [12 - 24FT]:	+165.1mm-0	[+6.50in-0]
7.3-14.6M [24 - 48FT]:	+317.5mm-0	[+12.50in-0]
14.6 - 30.5M [48-100FT]:	+622.3mm-0	[+24.50in-0]
OVER 30M [100FT]	+2% OF FINISHED LENGTH	

PART NUMBER LEGEND


702000D02F061

CABLE TYPE
22AWG SHLD, PVC

COUPLING NUT OPTIONS
BLANK= DIE CAST ZINC
1= 303 STAINLESS STEEL
2= NON METALLIC
8= 316 ST. STEEL

FINISHED LENGTH:
F010= 1 FOOT
F100= 10FEET

M005= 0.5 METER
M010= 1 METER
M100= 10 METER

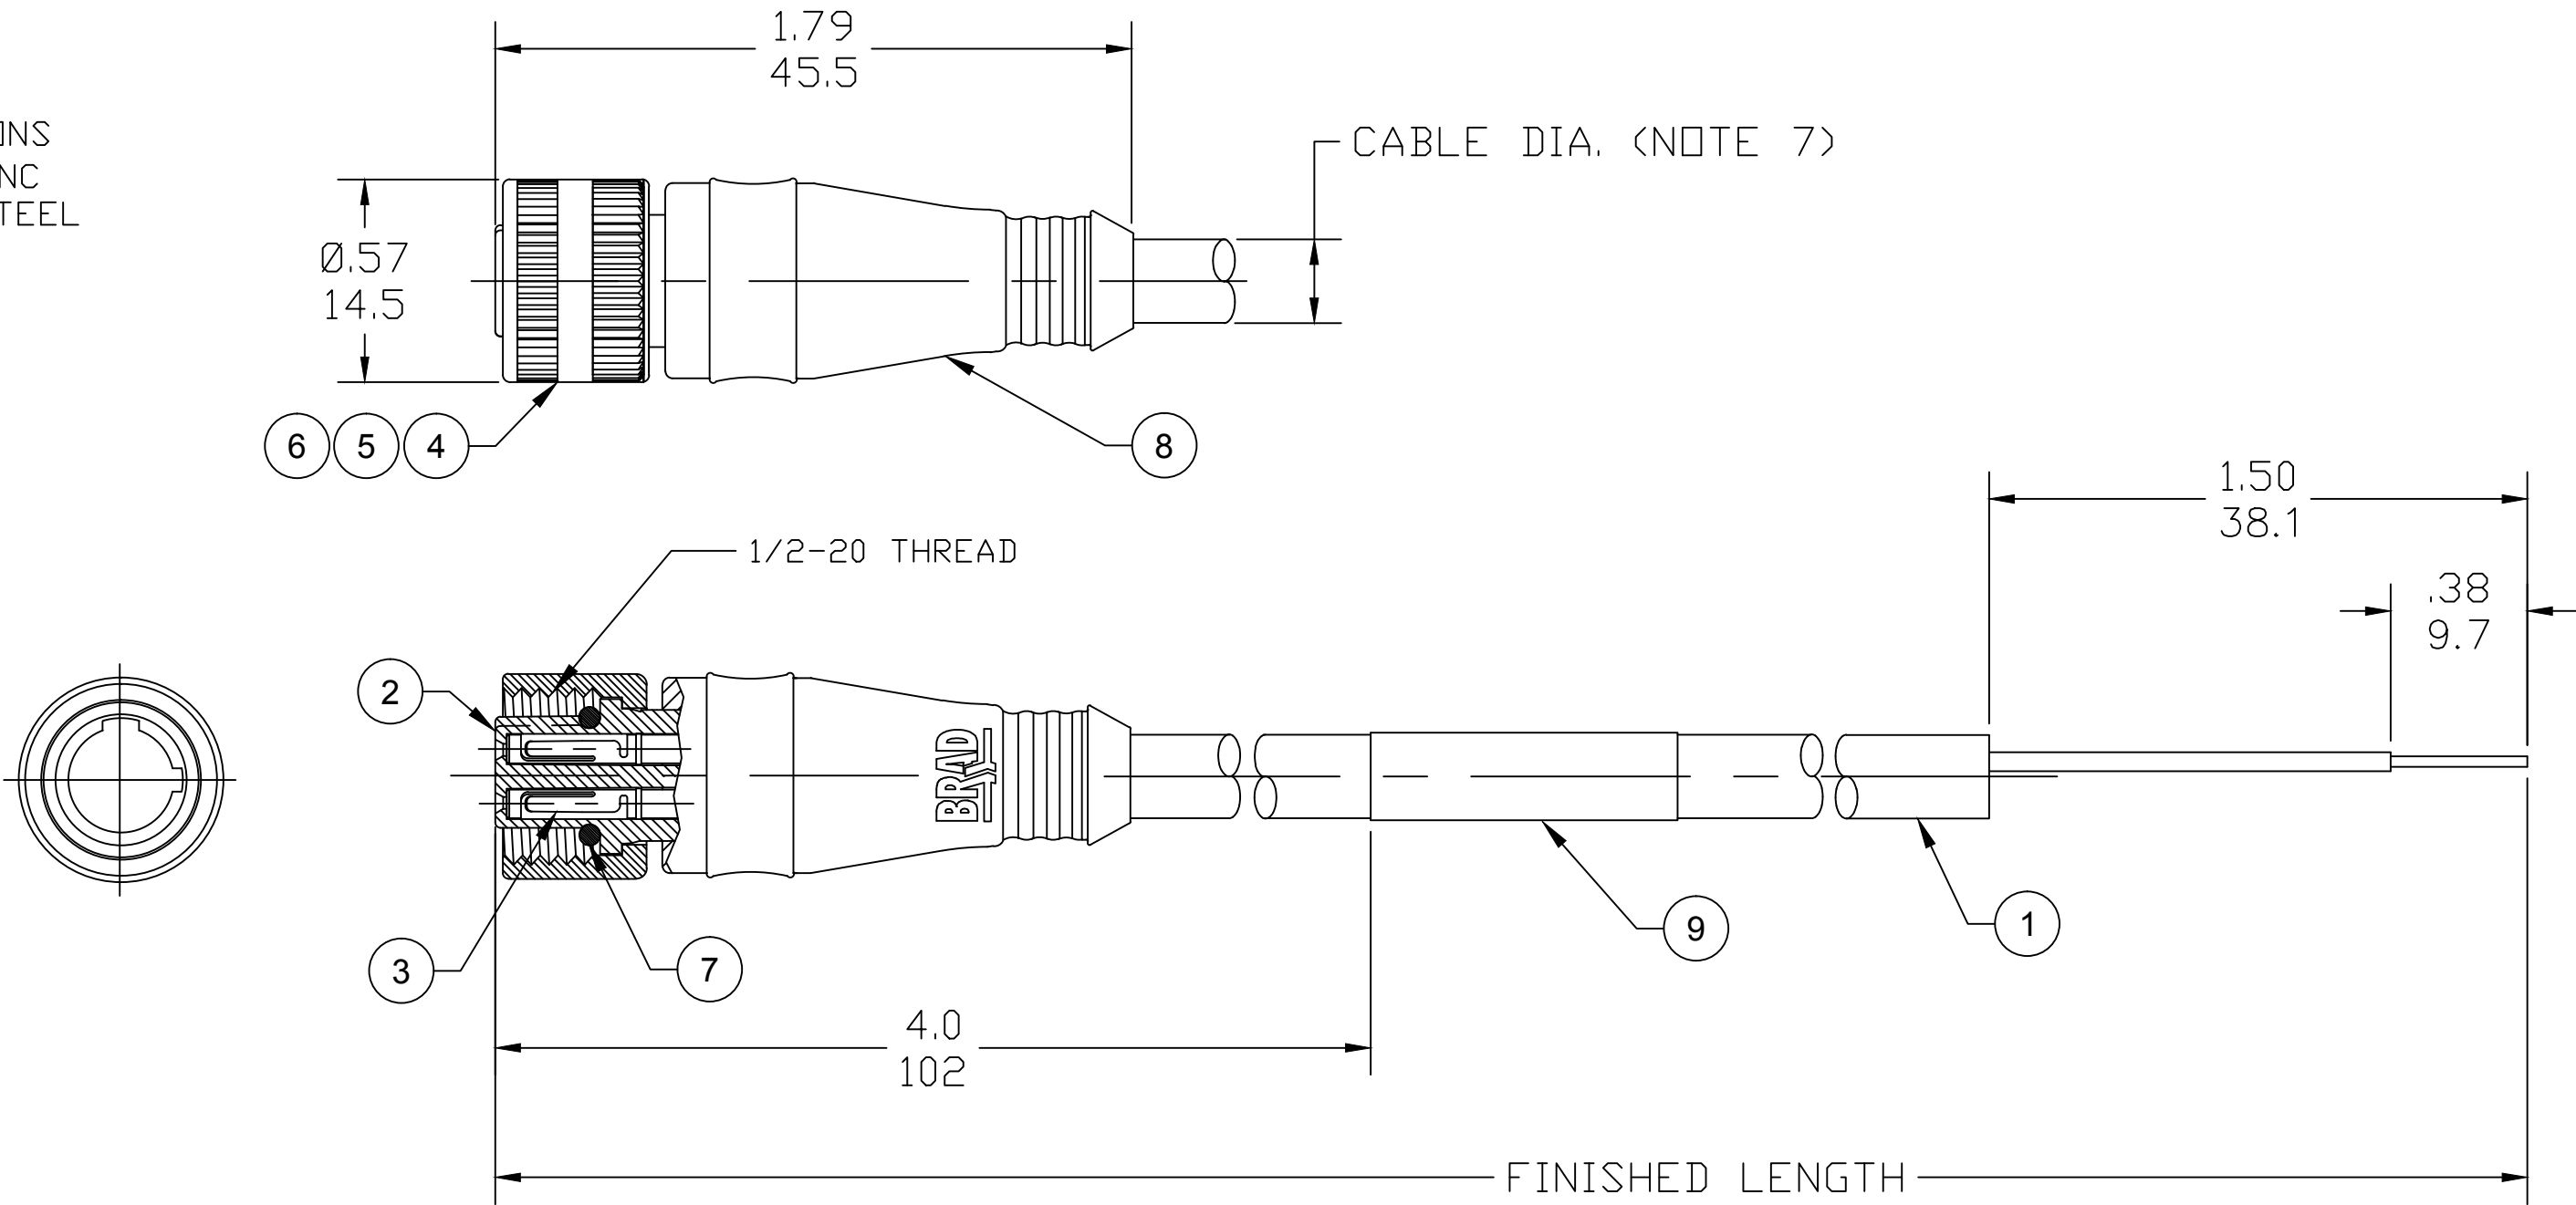

- NOTES:
1. MATERIAL: AS NOTED
 2. FINISH: AS NOTED
 3. ELECTRICAL:
VOLTAGE: 250 VOLTS AC/DC
CURRENT: 4A
 4. TEMP RATING: -20°TO +105°C
 5. PROTECTION: IP67 (WHEN MATED)
 6. COUPLING THREAD: 1/2-20 UNF
 7. CABLE DIA: MIN .20 FOR 2 CIR, MAX .25 FOR 6 CIR
 8. ALL DIMS ARE FOR REFERENCE
UNLESS NOTED OTHERWISE

9	FLAG LABEL	VINYL	BLACK/YELLOW
8	OVERMOLD	PVC	YELLOW
7	O-RING	NITRILE	RED
6	COUPLING NUT, FEMALE THD0 (-2 OPT)	DELFIN	WHITE
5	COUPLING NUT, FEMALE THD (-1 & -8 OPT)	ST. STEEL	PASSIVATED
4	COUPLING NUT, FEMALE THD (STD OPT)	ZINC DIE-CAST	BLACK
3	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
2	FEMALE INSERT	NYLON	BLACK
1	CABLE, 22 AWG, SHIELDED	PVC JACKET	YELLOW
ITEM	DESCRIPTION	MATERIAL	FINISH

RELEASED
EC NO: ICG2018-0035
DRWN: RSTONE 2017/07/14
CHKD: M ZIELIN 2017/07/19
APPR: BWOODMAN 2017/07/21

DESCRIPTION
REV

QUALITY SYMBOL
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ±---
3 PLACES ±---
2 PLACES ±---
1 PLACE ±---
ANGULAR ±---°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM
DRAWN BY RSTONE
DATE 2017/07/14
CHECKED BY M ZIELIN
DATE 2017/07/19
APPROVED BY BWOODMAN
DATE 2017/07/21
MATERIAL NO. -
SIZE C
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE ---
DESIGN UNITS INCH
THIRD ANGLE PROJECTION
TITLE
MIC CORD ASSY 2-6 POLE
FEMALE, DUAL KEY
22 AWG SHIELDED PVC
MOLEX INCORPORATED
DOCUMENT NO. SD-120072-022
SHEET NO. 1 OF 1