



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Part Number Search

Enter a part number for fast access to your product.

Your Quote Request

Items in Quote: 0

[Go to Quote Request](#)



Field Attachable Connectors

> [eCat Home](#) > [Automation Products](#) > [Connectors and Cordsets](#) > [Profibus Products](#) > [Field Attachable Connectors](#)

Part Number: MA9D00-32

[Go to Specifications](#)

[Download Files](#)

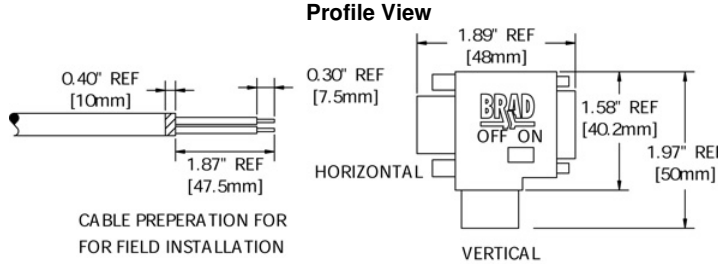

Color Rotation
 1 - NOT USED 4 - NOT USED 7 - NOT USED
 2 - NOT USED 5 - NOT USED 8 - GREEN (BUS-A)
 3 - RED (BUS-B) 6 - NOT USED 9 - NOT USED

If you would like a price quote for this part, indicate the quantity for this part and click "Add to Quote Request."

Quantity:

ATTRIBUTES SELECTED

Style : Male 9-Pin D-Sub, ABS housing
 Connector Configuration : straight or right angle cable entrance

DOWNLOAD FILES

Profile View

[DSUB HV FA.dxf](#)

Face View

[DSUB 9P Face View.dxf](#)

Color Rotation

[DSUB Profibus Color Rotation.dxf](#)

SPECIFICATIONS

Mechanical

Housing Material - ABS
 Terminating Resistor - Yes, internally switch selectable

Electrical

Voltage Rating - 30V
 Current - 4A

Environmental

Protection - IP20
 Ambient Operating Temperature - -13 to 185 degF (125 to 85 degC)