

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

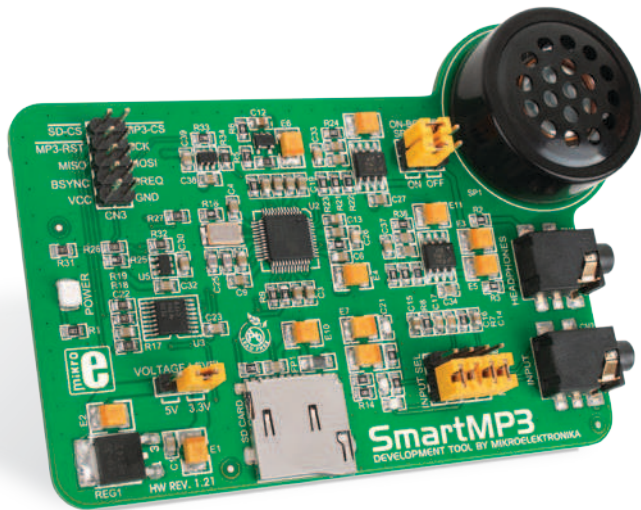

SmartMP3™

Board is ideal for creating mp3 players and adding audio and music features to your prototype devices, even with lower-performance microcontrollers.



TO OUR VALUED CUSTOMERS

I want to express my thanks to you for being interested in our products and for having confidence in MikroElektronika.

The primary aim of our company is to design and produce high quality electronic products and to constantly improve the performance thereof in order to better suit your needs.

A handwritten signature in white ink, appearing to read 'N. Matic', is positioned on the right side of the page.

Nebojsa Matic
General Manager

Table of Contents

Introduction	4
Jumpers	6
Connector Pinout	7
Dimensions	8
Disclaimer	11


Introduction

SmartMP3™ is an additional board used to reproduce audio files in several formats. It contains **VS1053** - Ogg Vorbis/MP3/AAC/WMA/FLAC/WAV/MIDI stereo audio codec, two **3.5mm stereo audio connectors** (MIC/LINE IN and Headphones), built-in **speaker**, **microSD** card slot as well as **2x5 male header** for further connectivity with MikroElektronika Easy development boards.

SmartMP3™ communicates with the target board microcontroller via SPI interface. The connectivity can be established through the flat cable provided with the board. With regard to the fact that different development boards use different power supply voltages, it is necessary to adjust SmartMP3™ voltage levels via appropriate jumper (**J1**).



Jumpers

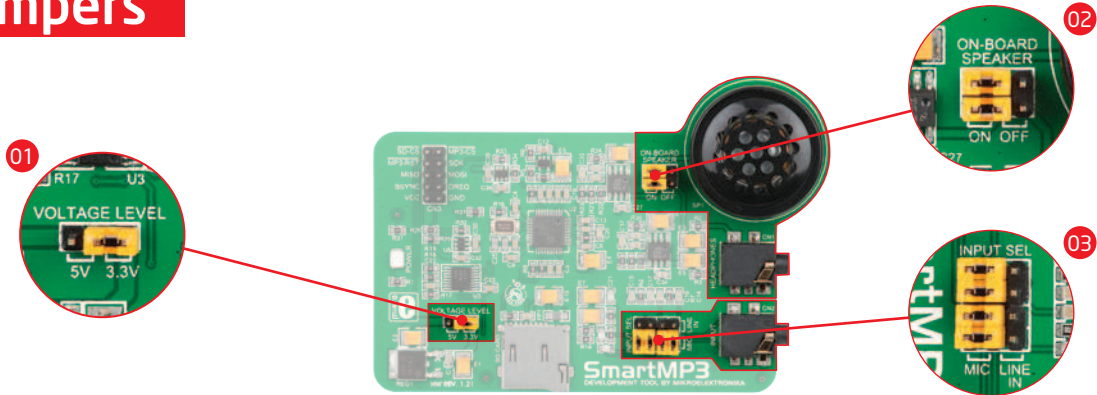

SmartMP3™ also contains several jumpers which provide you with options below:

01 This jumper is used to select whether 3.3V or 5V voltage level will be used (3.3V position by default). In case that Easy development board uses 5V power supply, it is necessary to place jumper **J1** in 5V position. Otherwise, jumper **J1** should be left in its default position (3.3V).

02 These jumpers are used to select whether built-in **speaker** (ON) or **headphones** output (OFF) will be used (ON position by default). In case that you want to use 3.5mm stereo audio connector as headphones output, it is necessary to place jumpers in **OFF** position. Otherwise if you want to use built-in speaker, jumpers should be left in its default position (**ON**).

03 These jumpers are used to select whether **microphone** or **LINE** input will be used (**MIC** position by default). In case that you want to use 3.5mm stereo audio connector as **LINE** input, it is necessary to place jumpers in **LINE IN** position. Otherwise if you want to use it as microphone input, jumpers should be left in its default position (**MIC**).

Connector Pinout

- 01 **GND** - Ground
- 02 **VCC** - Power supply
- 03 **DREQ** - Data request
- 04 **BSYNC** - Byte sync
- 05 **MOSI** - Master Out Slave In

- 06 **MISO** - Master In Slave Out
- 07 **SCK** - SPI Clock
- 08 **MP3-RST** - VS1053 reset
- 09 **MP3-C3** - VS1053 chip select
- 10 **SD-CS** - MicroSD chip select




Figure 1: SmartMP3™ connector pinout



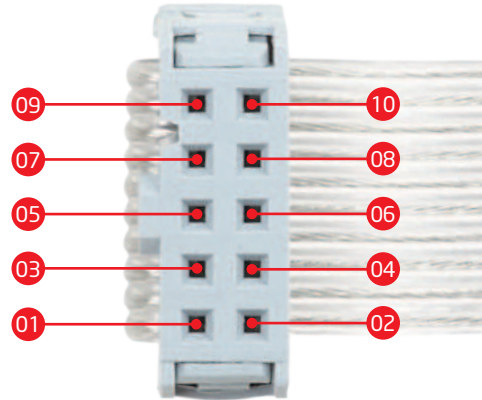



Figure 2: Flat cable pinout

Dimensions

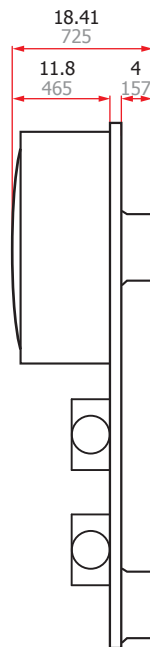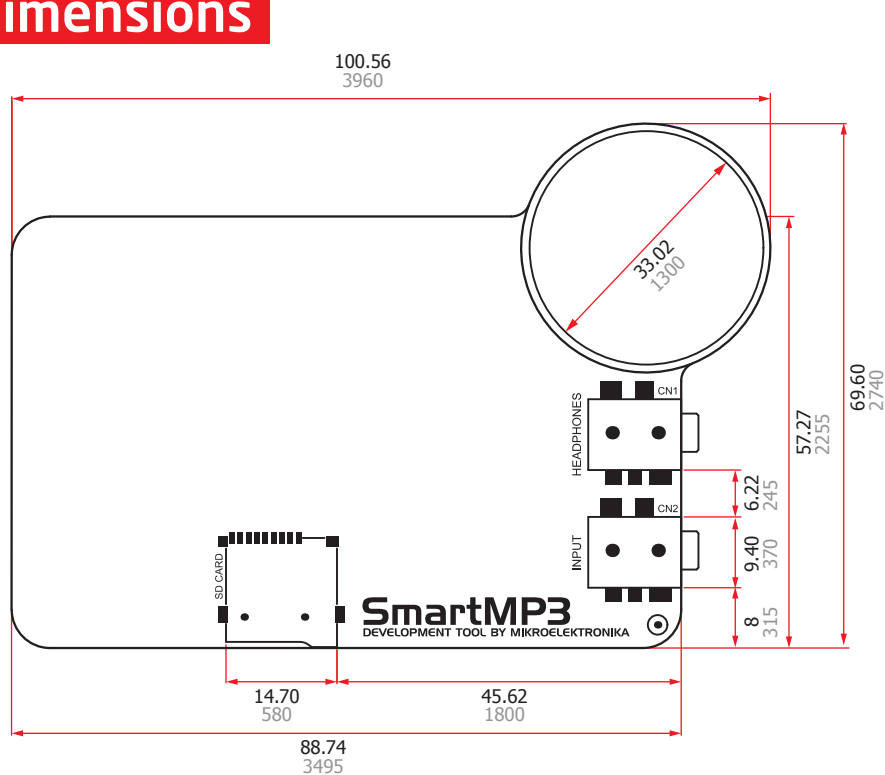

Legend

- mm
- mils

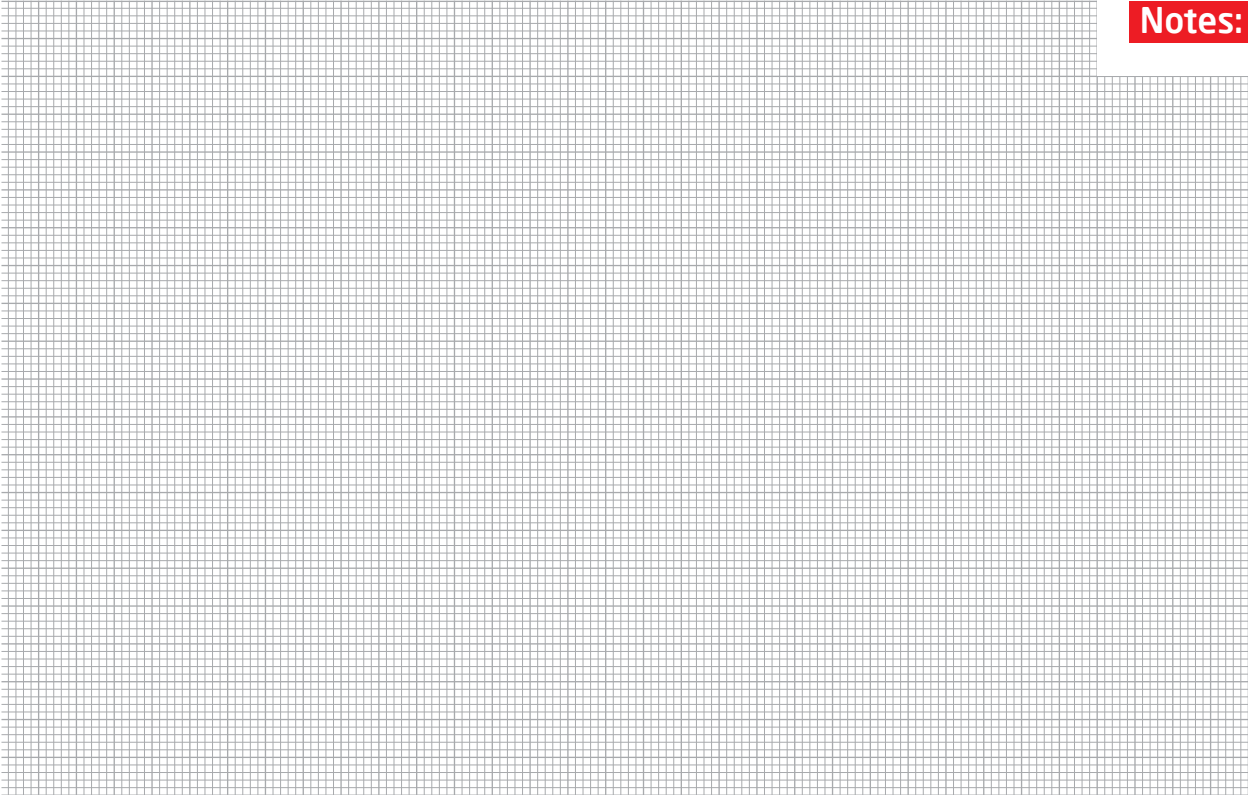

Notes:

DISCLAIMER

All the products owned by MikroElektronika are protected by copyright law and international copyright treaty. Therefore, this manual is to be treated as any other copyright material. No part of this manual, including product and software described herein, may be reproduced, stored in a retrieval system, translated or transmitted in any form or by any means, without the prior written permission of MikroElektronika. The manual PDF edition can be printed for private or local use, but not for distribution. Any modification of this manual is prohibited.

MikroElektronika provides this manual 'as is' without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties or conditions of merchantability or fitness for a particular purpose.

MikroElektronika shall assume no responsibility or liability for any errors, omissions and inaccuracies that may appear in this manual. In no event shall MikroElektronika, its directors, officers, employees or distributors be liable for any indirect, specific, incidental or consequential damages (including damages for loss of business profits and business information, business interruption or any other pecuniary loss) arising out of the use of this manual or product, even if MikroElektronika has been advised of the possibility of such damages. MikroElektronika reserves the right to change information contained in this manual at any time without prior notice, if necessary.

HIGH RISK ACTIVITIES

The products of MikroElektronika are not fault - tolerant nor designed, manufactured or intended for use or resale as on - line control equipment in hazardous environments requiring fail - safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of Software could lead directly to death, personal injury or severe physical or environmental damage ('High Risk Activities'). MikroElektronika and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

TRADEMARKS

The MikroElektronika name and logo, the MikroElektronika logo, mikroC™, mikroBasic™, mikroPascal™, mikroProg™ and SmartMP3™ are trademarks of MikroElektronika. All other trademarks mentioned herein are property of their respective companies.

All other product and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are only used for identification or explanation and to the owners' benefit, with no intent to infringe.



If you want to learn more about our products, please visit our website at www.mikroe.com

If you are experiencing some problems with any of our products or just need additional information, please place your ticket at www.mikroe.com/esupport

If you have any questions, comments or business proposals,
do not hesitate to contact us at office@mikroe.com

smartMP3 Manual
ver. 1.21

