



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MN30 True RMS AutoSensing™ Multimeter + NCV

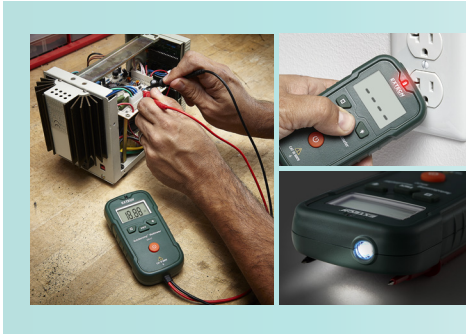

Easy-to-use smart pocket multimeter with AutoSensing feature enables the meter to recognize the input and automatically switch to the correct mode of operation (i.e. Voltage to Resistance measurement). True RMS AC Voltage measurement allows for accurate readings regardless of waveforms. Built-in Non-Contact Voltage (NCV) Detector allows for quick detection of live voltage. Convenient LED flashlight illuminates dimly lit area.



Features

- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- Unique smart AutoSensing feature
- Built-in Non-Contact Voltage (NCV) detector
- Convenient built-in LED Flashlight
- Audible Continuity tester
- 4000 count LCD display
- Low battery indicator and Auto Power Off feature
- Overload indication
- CAT III-600V safety rating
- Complete with integrated test leads and two AAA batteries

Specifications	Range	Max Resolution	Basic Accuracy
AC Voltage	600V	0.01V	±(1.8%+3)
DC Voltage	600V	0.01V	±(1.5%+3)
Non-Contact Voltage (NCV)	50V to 600V		
Resistance	1Ω to 10MΩ	1Ω	≤200Ω±(2.5%+4), >200Ω±(2%+3)
Continuity	<30Ω (beeper)		
Dimensions	4.8x2.6x1.4" (123x65x35mm)		
Weight	4.9oz (140g)		

Ordering

MN30 True RMS AutoSensing™ Multimeter+NCV



UPC Code: 793950370803