# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





non-slip grip

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

Screwdriver, bladed, graded, for test socket screws, size: 0.9 x 6.5 x 175 mm, 2-component grip, with

The illustration shows version SZG 0,6 x 3,5

#### Why buy this product

#### VDE approval

Screwdrivers for Phillips screws with Pozidriv and Phillips Recess screw head

#### Key commercial data

Packing unit	1
Minimum order quantity	10
Catalog page	Page 285 (CL2-2011)
GTIN	4 017918 019143
Custom tariff number	82054000
Country of origin	CZECH REPUBLIC

#### Technical data

#### General

Note	Stepped blade
Length (b)	287 mm
Width (a)	40 mm
Design	Phillips
Blade thickness	0.9 mm
Blade width	6.5 mm
Blade height	175 mm
Weight	85 g
Test standard	IEC 60900:2004

#### Classifications

eclass

eCl@ss 4.0	21040401
eCl@ss 4.1	21040401



#### Classifications

#### eclass

eCl@ss 5.0	21040401
eCl@ss 5.1	21040401
eCl@ss 6.0	21040401
eCl@ss 7.0	21040409

#### etim

ETIM 2.0	EC000158
ETIM 3.0	EC000158
ETIM 4.0	EC000158

#### unspsc

UNSPSC 6.01	27111701
UNSPSC 7.0901	27111701
UNSPSC 11	27111701
UNSPSC 12.01	27111701
UNSPSC 13.2	27111701

#### Approvals

#### Approvals

Approvals

VDE approval of drawings / GOST

Ex Approvals

Approvals submitted

#### Approval details

VDE approval of drawings

GOST 📀


#### Drawings



Pictogram




Dimensioned drawing

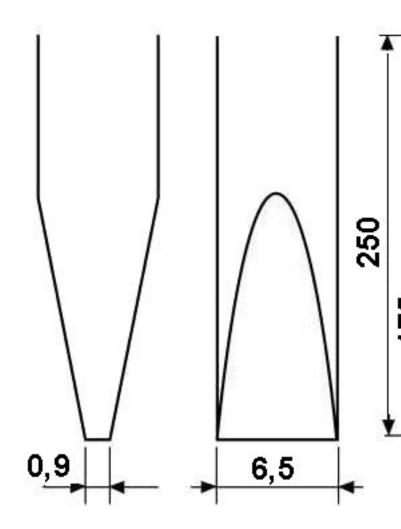



Schematic diagram

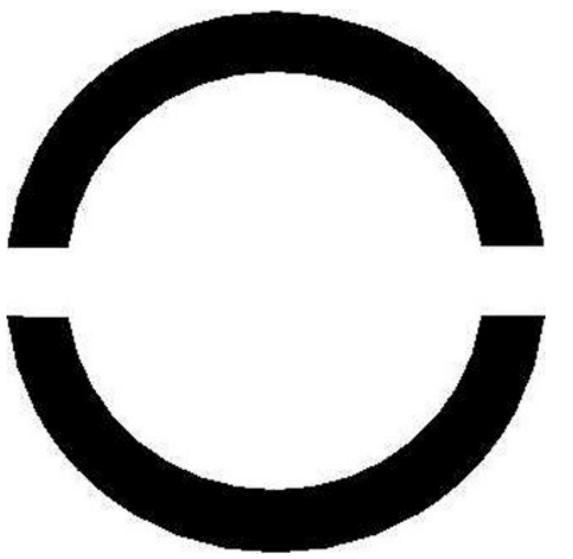

© Phoenix Contact 2012 - all rights reserved http://www.phoenixcontact.com