



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MPQ-ZNeo

Four Port In-System Programmer for ZiLOG ZNeo™

The MPQ-ZNeo is a member of RPM's family of dedicated in-system device programmers. Like all MPQ's, it is designed to be reliable, efficient, flexible and cost effective - all of the features you require in a manufacturing programmer.

Fast and Portable

Up to four different target images can be stored in the programmer's internal Flash memory, allowing faster programming times and standalone operation. In addition, our adaptive programming algorithm provides the fastest programming time for each image, while ensuring the image integrity of each device programmed.

Program Multiple Devices Simultaneously


Four port programming allows each MPQ to program the same image on up to four separate target devices simultaneously, increasing manufacturing throughput fourfold. Up to 16 MPQ's may be configured in an array, to allow programming of up to 64 devices simultaneously.

Stand-alone, ATE-Controlled or PC-Controlled

MPQ-ZNeo can be operated stand-alone (just press a button to initiate programming), directly from a host PC using MPManger software, or under the control of your Automated Test Equipment (ATE) system.

Full Range of Voltage and Frequency Support

MPQ-ZNeo is compatible with the full range of ZNeo power supply voltages, from 2.7 to 3.6V, and operates

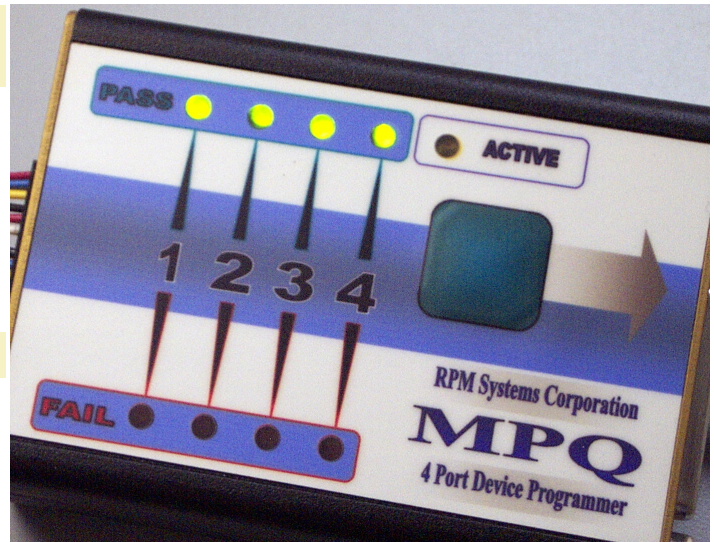

with any supported target system clock frequency from 32KHz to 20MHz.

Rugged and Ready for Manufacturing World Wide

Features like an extruded aluminum chassis, universal power supply and extensive electrical protection ensure that MPQ-ZNEO will be at home in any manufacturing environment.

Powerful Software - Field Upgradable

MPQ-ZNeo comes complete with MPManger software to provide programmer configuration and image management, PC-controlled device programming, and more. MPManger also provides the ability to upgrade your MPQ-ZNeo programmer on site as support for new devices is released by RPM.

Reliable, Efficient and Affordable

MPQ-ZNeo is a rock-solid four-port manufacturing programmer with internal data storage. It's also priced below \$500.*

* Quantity 1 U.S., FOB Redmond, Washington

MPQ-ZNeo In-System Programmer

Full Memory Programming Speeds for Selected Devices

Verify Method	Z16F2811 (128MB - 18MHz)	Z16F6411 (64MB - 18MHz)	Z16F3211 (32MB - 18MHz)
Program / CRC Verify	19 Seconds	11 Seconds	6 Seconds
Program / Read Verify	37 Seconds	21 Seconds	11 Seconds

Times shown are to erase, program and verify four devices using maximum size program images for each device. Actual times will vary depending upon the image content.

Supported Devices

Z16F2810, Z16F2811, Z16F3211, Z16F6411

Specifications

Target Voltage Range:	2.70 to 3.6VDC
Target Frequency Range :	32KHz to 20MHz
Power Supply:	100 to 240VAC, 50/60Hz **
Operating Temperature Range:	0°C to +65°C

Software Support

RPM Systems *MPManager* Software

- Programmer Image Management
- Programmer Configuration
- PC-Controlled Programming
- Windows™ 98, NT, 2000, XP

** MPQ-PS Power Supply included with MPQ-ZNeo