



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NO.	ENGINEERING NO.	LENGTH	POLES									
1206132003	LWLW4032K03M010	39.4 (1M)	4									
1206132004	LWLW5032K03M010	39.4 (1M)	5									

NOTICE: THIS PART IS CSA AND FACTORY MUTUAL APPROVED
NO CHANGES CAN BE MADE TO THE ASSEMBLY, COMPONENTS
OR SUPPLIER WITHOUT PRIOR APPROVAL FROM CSA AND
FACTORY MUTUAL.

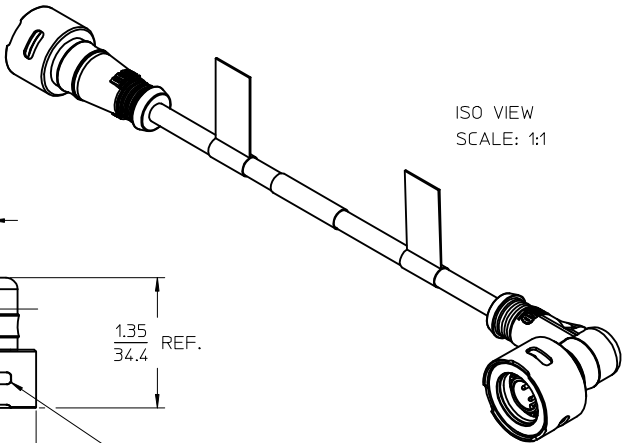


⑧ **LWLWX032K03MXXX**

DOUBLE END
POLE QTY.
HEAD STYLE (S)
CABLE TYPE
FINISHED LENGTH
REF. XXX = METERS
EXAMPLE 010- 1M

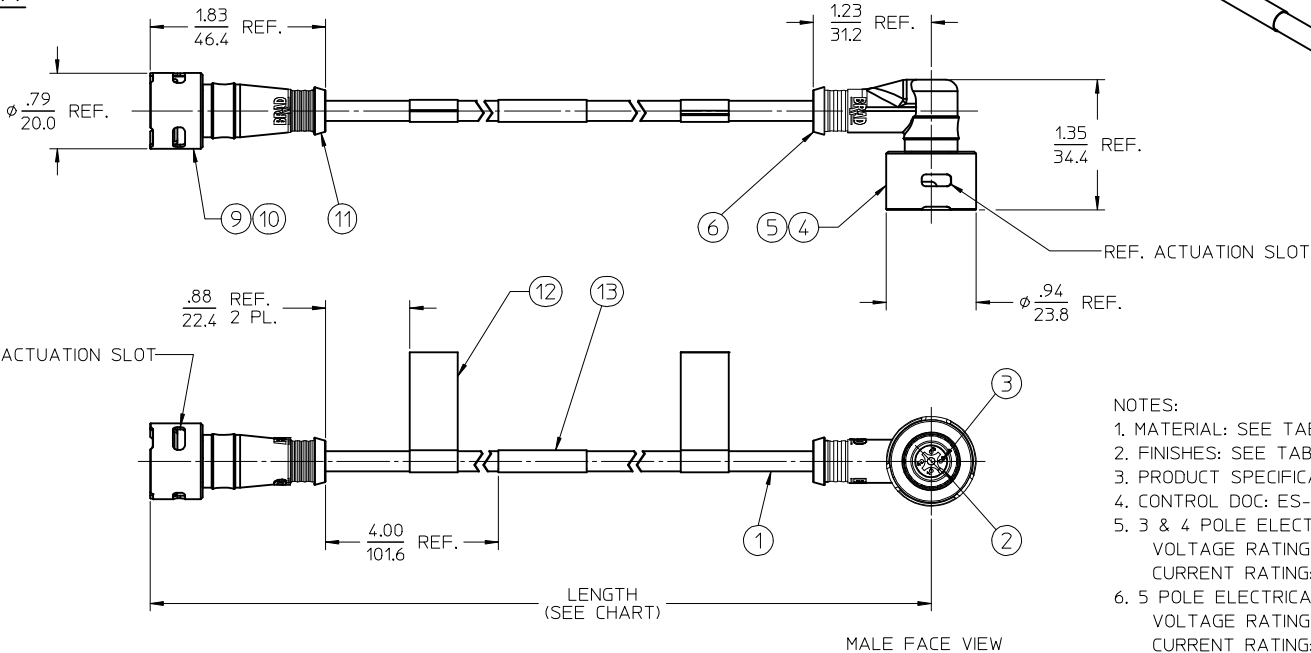

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. PRODUCT SPECIFICATIONS: PS-120614-001
 4. CONTROL DOC: ES-120614-001
 - 3 & 4 POLE ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 125V
CURRENT RATING: 4 AMPS
 - 5 POLE ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 32V
CURRENT RATING: 4 AMPS



FEMALE FACE VIEW			MALE FACE VIEW		
3 POLE	4 POLE	5 POLE	3 POLE	4 POLE	5 POLE
1 BROWN 2 NOT USED 3 BLUE 4 BLACK 5 NOT USED	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 NOT USED	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GRAY	1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GRAY

13	1	WRAP LABEL	PLASTIC FILM	BLACK/YELLOW
12	2	FLAG LABEL (WARNING)	POLYESTER	BLACK/ORANGE
11	1	OVERMOLD, FEMALE	TPE	YELLOW
10	1	OUTER SLEEVE, FEMALE	ST. STEEL	PASSIVATED
9	1	INNER SLEEVE, FEMALE	ST. STEEL	PASSIVATED
8	XX	CONTACT SOCKET	CU ALLOY	GOLD PLATED
7	1	INSERT, FEMALE	PUR	BLACK
6	1	OVERMOLD, MALE	TPE	YELLOW
5	1	OUTER SLEEVE, MALE	ST. STEEL	PASSIVATED
4	1	INNER SLEEVE, MALE	ST. STEEL	PASSIVATED
3	XX	CONTACT PIN	CU ALLOY	GOLD PLATED
2	1	INSERT, MALE	PUR	BLACK
1	1	CABLE, #18 AWG ITC/PLTC	TPE	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

ADDED P/N LEGEND

EC NO: IPG2014-0138

2013/07/24

DRWINRSTONE

2013/08/01

CHKD:B WOODMAN

2013/12/30

APPR:B WOODMAN

DESCRIPTION

REV

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	---	±
3 PLACES ±	---	±
2 PLACES ±	---	±.01
1 PLACE ±	0.3	±

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY

RSTONE

DATE

2011/11/23

CHECKED BY

L. HARTMANN

DATE

2012/01/27

APPROVED BY

JFMURPHY

DATE

2012/04/18

SCALE

1:1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

ULTRA-LOCK ZONE 2

MALE 90 TO FEM STRAIGHT

K03, 18 AWG, TPE

MOLEX INCORPORATED

SD-120613-006

MATERIAL NO.

SEE CHART

DOCUMENT NO.

SD-120613-006

SHEET NO.

1 OF 1


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAWING NO.	DESCRIPTION	FINISHED GOOD REV. LEVEL
LWR000A18	MIC U-LOCK ZONE 2 RECEPT ASSY, FEM. 1/2 NPT, 22 AWG	C
LWR006A18	MIC U-LOCK ZONE 2 RECEPT ASSY, MALE 1/2 NPT, 22 AWG	B
LWRA00A18	MIC U-LOCK ZONE 2 RECEPT ASSY, FEM. 1/4 NPT, 22 AWG	C
LWRA06A18	MIC U-LOCK ZONE 2 RECEPT ASSY, MALE 1/4 NPT, 22 AWG	B
LWR000A16	MIC U-LOCK ZONE 2 RECEPT ASSY, FEM. 1/2 NPT, 18 AWG	B
LWR006A16	MIC U-LOCK ZONE 2 RECEPT ASSY, MALE 1/2 NPT, 18 AWG	B
LWXXXXXXC02XXXX	U-LOCK ZONE 2 C02 CORD ASSY, 18AWG SJ00W, DC COLOR	C
LWXXXXXXK03XXXX	U-LOCK ZONE 2 K03 CORD ASSY, 18AWG TPE, DC COLOR	C
LWXXXXXXK05XXXX	U-LOCK ZONE 2 K05 CORD ASSY, 22AWG TPE, DC COLOR	C
SD-120614-999	CONTROL DOC FOR ULTRA-LOCK ZONE 2	D

PRELIMINARY EC NO: IPG2016-0500 DRWN:RSTONE 2016/03/07 CHKD:WAI LEUNG 2016/05/20 APPR:JFMURPHY 2016/05/20 A	DESCRIPTION ▽=0 ▽=0	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY RSTONE	DATE 2016/03/07	TITLE SCHEDULE DRAWING FOR ULTRA LOCK ZONE 2					
		4 PLACES ± --- ± ---				CHECKED BY WAI LEUNG						DATE	
		3 PLACES ± --- ± ---				APPROVED BY JFMURPHY		DATE 2016/05/20		molex			
		2 PLACES ± --- ± ---											
		1 PLACE ± --- ± ---								DOCUMENT NO. SD-120614-998			
		0 PLACE ± --- ± ---											
				ANGULAR ± ---°		MATERIAL NO. -		SHEET NO. 1 OF 1					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

CLASS 1, DIVISION 2, GROUP A, B, C, OR D
HAZARDOUS LOCATION

NON-HAZARDOUS LOCATION

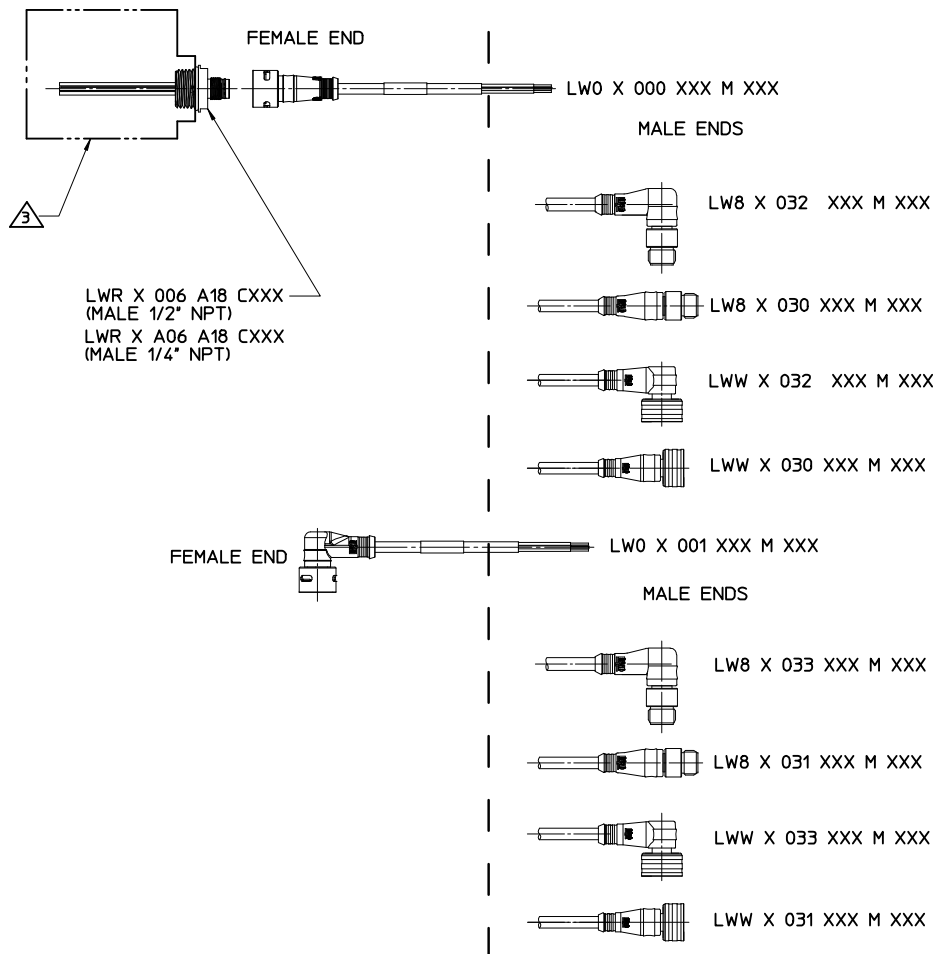


NOTES:

1. THE INSTALLATION MUST BE IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE (NEC), ANSI/NFPA 70. SPECIFIC REQUIREMENTS FOR THE INSTALLATION OF ITC RATED CABLE MAY BE FOUND IN ARTICLE 501.4(B)(1)(5) AND ARTICLE 727.4
2. THE MOLDED CONSTRUCTION OF THE CORDSET AND GAS/VAPORTIGHT CONTINUOUS SHEATH OF THE CABLE MEET THE REQUIREMENTS OF THE NEC, ARTICLE 501-5(E)(2) FOR CABLE SEALS IN CLASS 1, DIVISION 2
4. ATEX cert no: ATEX FM15ATEX0048X IECEx FMG 15.0012X ①

REF. SEE SHEET 3 FOR CONFIGURATION INFORMATION

CLASS 1, DIVISION 2, GROUP A, B, C, OR D
HAZARDOUS LOCATION

NON-HAZARDOUS LOCATION

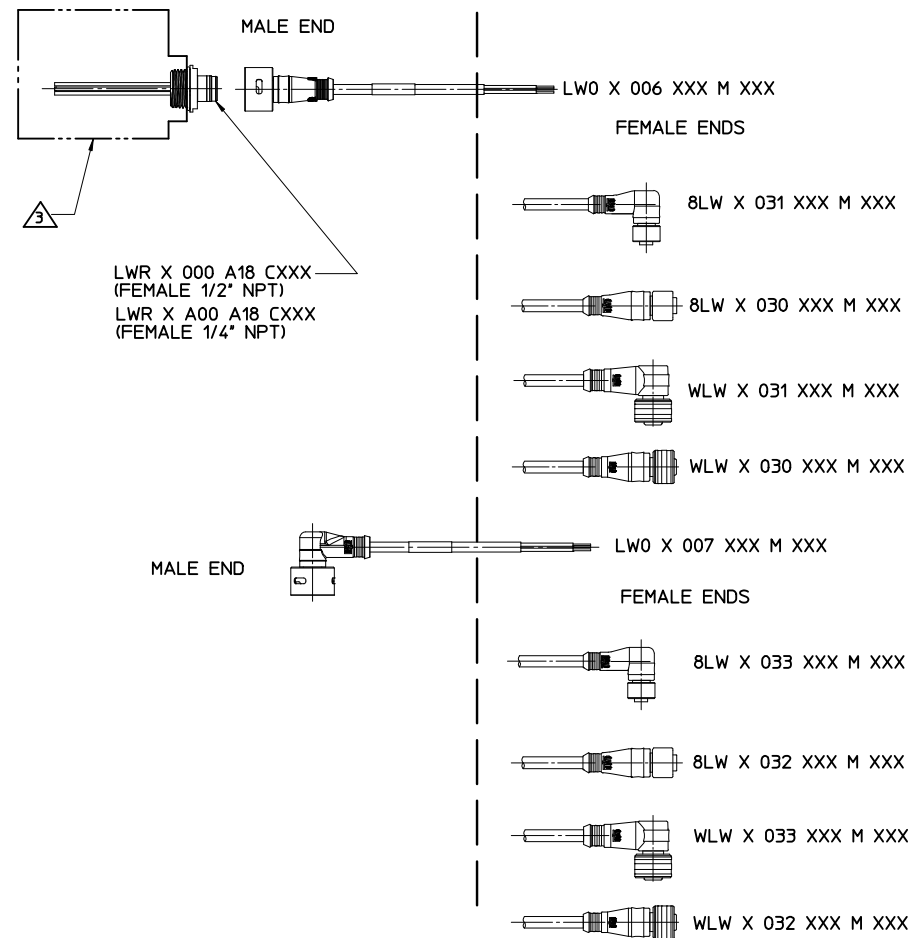



NOTICE: THIS PART IS CSA AND FACTORY MUTUAL APPROVED
NO CHANGES CAN BE MADE TO THE ASSEMBLY, COMPONENTS
OR SUPPLIER WITHOUT PRIOR APPROVAL FROM CSA AND
FACTORY MUTUAL.

THIS DRAWING SUPERSEDES ES-120614-001 REV-B

ADDED NOTE 4 EC NO: IPG2016-0500 2015/10/16 DRAWNR: STONE 2016/05/20 CHKD: WAI LEUNG APPR: JFMURPHY 2016/05/20	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION			
				4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	mm INCH	DRAWN BY RSTONE	DATE 2012/05/18	TITLE CONTROL DOC FOR ULTRA-LOCK ZONE 2					
						CHECKED BY K JOZWIK	DATE 2012/05/22	MOLEX INCORPORATED					
						APPROVED BY JFMURPHY	DATE 2012/08/27						
						MATERIAL NO. 1206149999					DOCUMENT NO. SD-120614-999	SHEET NO. 1 OF 3	
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

CLASS 1, DIVISION 2, GROUP A, B, C, OR D
HAZARDOUS LOCATION


HAZARDOUS LOCATION

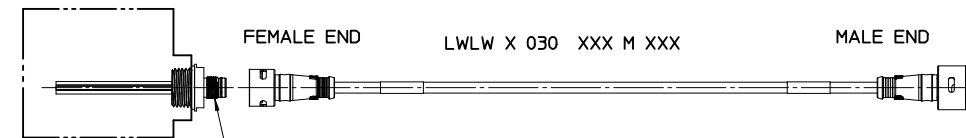


LWR X 006 A18 CXXX
(MALE 1/2" NPT)
LWR X A06 A18 CXXX
(MALE 1/4" NPT)

LWR X 000 A18 CXXX
(FEMALE 1/2" NPT)
LWR X A00 A18 CXXX
(FEMALE 1/4" NPT)


LWLW X 032 XXX M XXX



LWLW X 031 XXX M XXX



LWLW X 033 XXX M XXX



REF:

1. SEE SHEET 1 FOR NOTES
2. SEE SHEET 3 FOR CONFIGURATION INFORMATION

NOTICE: THIS PART IS CSA AND FACTORY MUTUAL APPROVED
NO CHANGES CAN BE MADE TO THE ASSEMBLY, COMPONENTS
OR SUPPLIER WITHOUT PRIOR APPROVAL FROM CSA AND
FACTORY MUTUAL.

SEE SHEET 1 EC NO: JFG2016-0500 DRAWN BY: DRWNRSTONE CHKD BY: WAI LEUNG APPR: JFMURPHY REV D	DESCRIPTION 2015/10/16 2016/05/20 2016/05/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 			
				mm	INCH	DRAWN BY RSTONE	DATE 2012/05/18	TITLE CONTROL DOC FOR ULTRA-LOCK ZONE 2				
			4 PLACES	± ---	± ---	CHECKED BY K JOZWIK	DATE 2012/05/22					
			3 PLACES	± ---	± ---	APPROVED BY JFMURPHY		DATE 2012/08/27		MOLEX INCORPORATED		
			2 PLACES	± ---	± ---							
			1 PLACE	± ---	± ---	ANGULAR ± ---°		MATERIAL NO. 1206149999				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DOCUMENT NO. SD-120614-999						
											SHEET NO. 2 OF 3	
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

M12/MICROCHANGE ULTRA-LOCK CORD CONNECTORS AND CORD SETS

LWO 3 000 C02 M 020 8
I II III IV V VI VII

I: CONNECTOR TYPE
LWO= ULTRA-LOCK ZONE 2 MALE OR FEMALE SINGLE END CORDSET
LWV= ULTRA-LOCK ZONE 2 FEMALE TO STANDARD ULTRA-LOCK MALE DOUBLE ENDED CORDSET
WLW= ULTRA-LOCK ZONE 2 MALE TO STANDARD ULTRA-LOCK FEMALE DOUBLE ENDED CORDSET
LW8= ULTRA-LOCK ZONE 2 FEMALE TO STANDARD M12 MALE DOUBLE ENDED CORDSET
8LW= ULTRA-LOCK ZONE 2 MALE TO STANDARD M12 FEMALE DOUBLE ENDED CORDSET
LWLW= ULTRA-LOCK ZONE 2 FEMALE TO ULTRA-LOCK ZONE 2 MALE DOUBLE ENDED CORDSET

II: NUMBER OF POLES: 3= 3 PIN, 4= 4 PIN, 5 = 5 PIN

III: CONFIGURATION
SINGLE ENDED:
000= STRAIGHT FEMALE CONNECTOR
001= FEMALE 90°
006= STRAIGHT MALE, EXTERNAL THREAD
007= MALE 90°

DOUBLE ENDED:
030= STRAIGHT FEMALE CONNECTOR TO STRAIGHT MALE CONNECTOR
031= FEMALE 90° TO MALE STRAIGHT
032= FEMALE STRAIGHT TO MALE 90°
033= FEMALE 90° TO MALE 90°

IV: CABLE TYPE
C02= SJ00W YELLOW, 18 AWG, DC CODE
K03= PLTC/ITC, 18 AWG, TPE JACKET
K05= PLTC/ITC, 22 AWG, TPE JACKET

V: UNIT OF MEASURE
F= FEET
M= METERS

VI: CABLE LENGTH (MAY BE ANY 3 DIGIT NUMBER FROM 001-100)
1ST DIGIT= 10 X LENGTH
2ND DIGIT= 1 X LENGTH
3RD DIGIT= .1 X LENGTH

VII: COUPLING NUT MATERIAL
ULTRA-LOCK ZONE 2 END(S) ARE STAINLESS STEEL

M12 OR ULTRA-LOCK:
NONE = STANDARD MATERIAL (NICKEL PLATED BRASS)
8= STAINLESS STEEL

NOTICE: THIS PART IS CSA AND FACTORY MUTUAL APPROVED
NO CHANGES CAN BE MADE TO THE ASSEMBLY, COMPONENTS
OR SUPPLIER WITHOUT PRIOR APPROVAL FROM CSA AND
FACTORY MUTUAL.

M12/MICROCHANGE ULTRA-LOCK OUTLETS

LWR 3 A00 A18 M 020 8
I II III IV V VI VII

I: CONNECTOR TYPE
LWR= LOCKING INLETS AND OUTLETS

II: NUMBER OF POLES 3=3 PIN, 4= 4 PIN, & 5= 5 PIN

III: CONFIGURATION
SINGLE ENDED:
A00= FEMALE STRAIGHT (INT.THEAD) 1/4-18 NPT
A06= MALE STRAIGHT (EXT.THEAD) 1/4-18 NPT
000= FEMALE STRAIGHT (INT.THEAD) 1/2-14 NPT
006= MALE STRAIGHT (EXT.THEAD) 1/2-14 NPT

IV: WIRE TYPE
A18= 22 AWG, PVC, DC COLOR CODE, UL TYPE 1061
A16= 18 AWG, PVC, DC COLOR CODE, UL TYPE 1569
000= PCB PINS
000= PCB PINS

V: UNIT OF MEASURE
A= INCHES
F= FEET
C= CENTIMETERS
M= METERS

VI: WIRE LENGTH (MAY BE ANY 3 DIGIT NUMBER FROM 001-100)
1ST DIGIT= 10 X LENGTH
2ND DIGIT= 1 X LENGTH
3RD DIGIT= .1 X LENGTH

VII: SHELL MATERIAL
M12 OR ULTRA-LOCK:
NONE = STANDARD MATERIAL (COPPER ZINC ALLOY)
3= NICKEL PLATED BRASS
8= STAINLESS STEEL

SEE SHEET 1 EC NO: IPG2016-0500 D DRAWN BY: DRWINRSTONE 2015/10/16 CHKD BY: CHKD-WAI LEUNG 2016/05/20 APPR: JFMURPHY 2016/05/20	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE CONTROL DOC FOR ULTRA-LOCK ZONE 2				
			4 PLACES	±---	±---	RSTONE	2012/05/18					
			3 PLACES	±---	±---	CHECKED BY	DATE					
			2 PLACES	±---	±---	K JOZWIK	2012/05/22					
	1 PLACE	±---	±---	APPROVED BY	DATE							
			ANGULAR ±---°		JFMURPHY	2012/08/27	MOLEX MOLEX INCORPORATED					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 1206149999		DOCUMENT NO. SD-120614-999		SHEET NO. 3 OF 3			
					SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						