



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Features

- Supports up to 20 W Power
- Low Insertion Loss 0.5 dB @ 10 GHz
- High Isolation 40 dB @ 3 GHz
- RoHS* Compliant

Description

The MSWSS-040-30 is a surface mount medium power series shunt switch. The shunt device has broad band high isolation. This device can be surface mounted onto a PC board to give a low insertion loss and high Isolation switch. The device can handle up to 20 watts of power. Hot switching will depend on the speed of switch driver.



(2012) Non-Hermetic

Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Breakdown Voltage	$I_R = 10 \text{ mA}$	V	500	—	—
Reverse Current	$V_B = 80 \text{ V}$	nA	—	—	100
Forward Voltage	$I_F = 100 \text{ mA}$	V	—	900	—
Junction Capacitance	$V_R = 10 \text{ V}$, 1 MHz Shunt Series	pF	—	0.15 0.15	—
Series Resistance	$I_F = 100 \text{ mA}$, 100 MHz Shunt Series	Ω	—	0.8 0.8	1.0 1.0
Lifetime	$I_F = 10 \text{ mA}$, $I_R = 6 \text{ mA}$, 50% Shunt Series	ns	—	2200 1500	—
I-Region	Shunt Series	μm	—	80 80	—
Insertion Loss	$I = -50 \text{ mA}$ $F = <8 \text{ GHz}$ $F = <3 \text{ GHz}$	dB	—	0.15 0.3	0.3 0.5
Isolation	$I = -50 \text{ mA}$ $F = <8 \text{ GHz}$ $F = <3 \text{ GHz}$	dB	35 25	45 30	—
Return Loss	$I = -50 \text{ mA}$ $F = <8 \text{ GHz}$	dB	23	28	—


* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Absolute Maximum Ratings^{3,4}

Parameter	Absolute Maximum
Breakdown Voltage	500 V
Forward Current	500 mA
Thermal Resistance	30 W CW
Junction Temperature	+150°C
Storage Temperature	-65°C to +125°C
Solder Temperature	+260°C per JEDEC STD-J-20C


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Input Power vs. Junction Temperature (mounted on heat sink @ 25°C, 1.3 GHz)

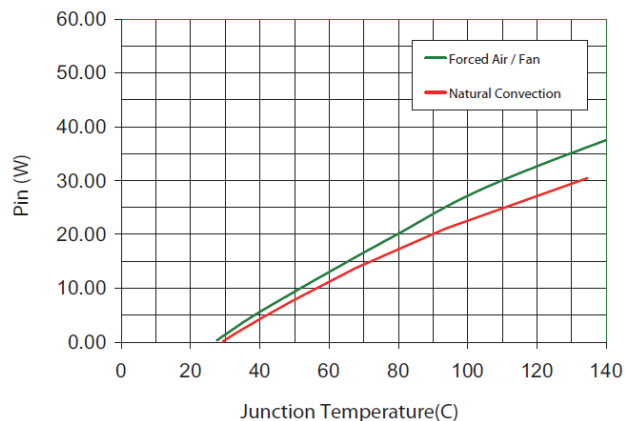


Typical Performance Curves @ +25°C

Resistance vs. Current Series Diode

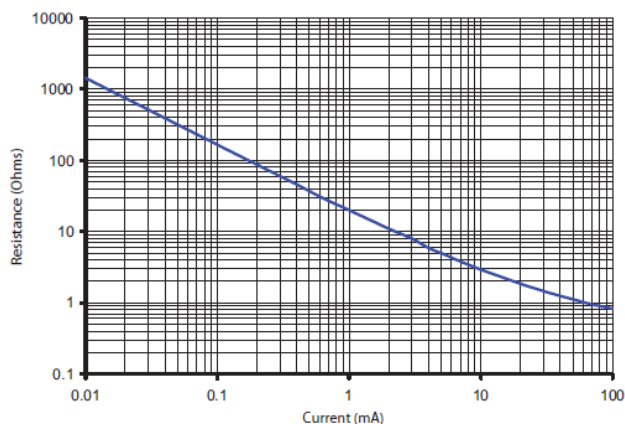


Resistance vs. Current Shunt Diode

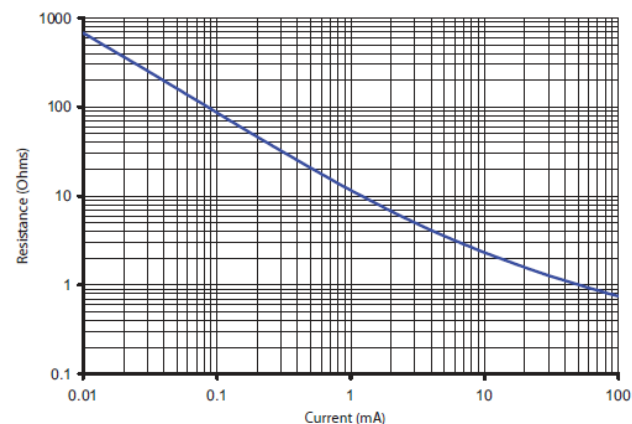


Typical Performance Curves @ +25°C


Insertion Loss

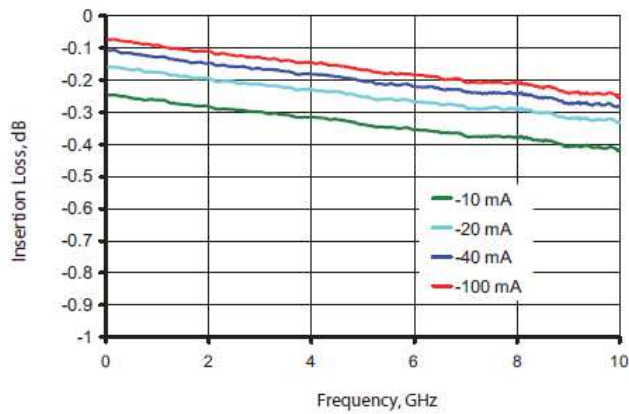


Isolation

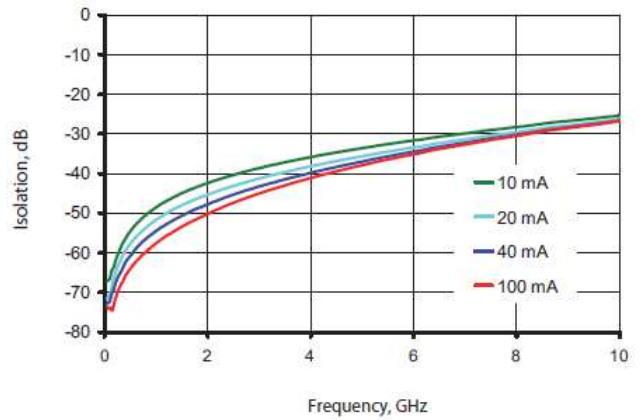


Input Return Loss

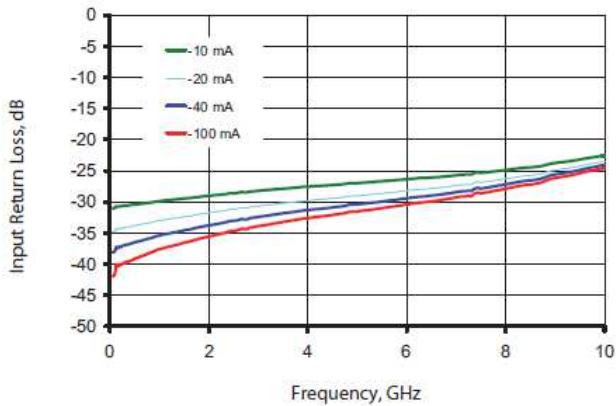

Output Return Loss

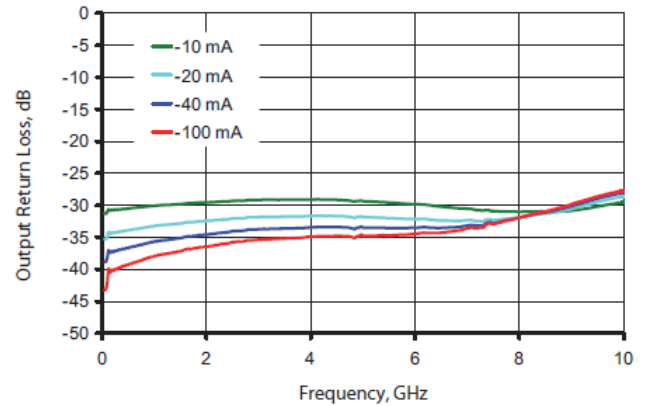

Printed Circuit Board Layout

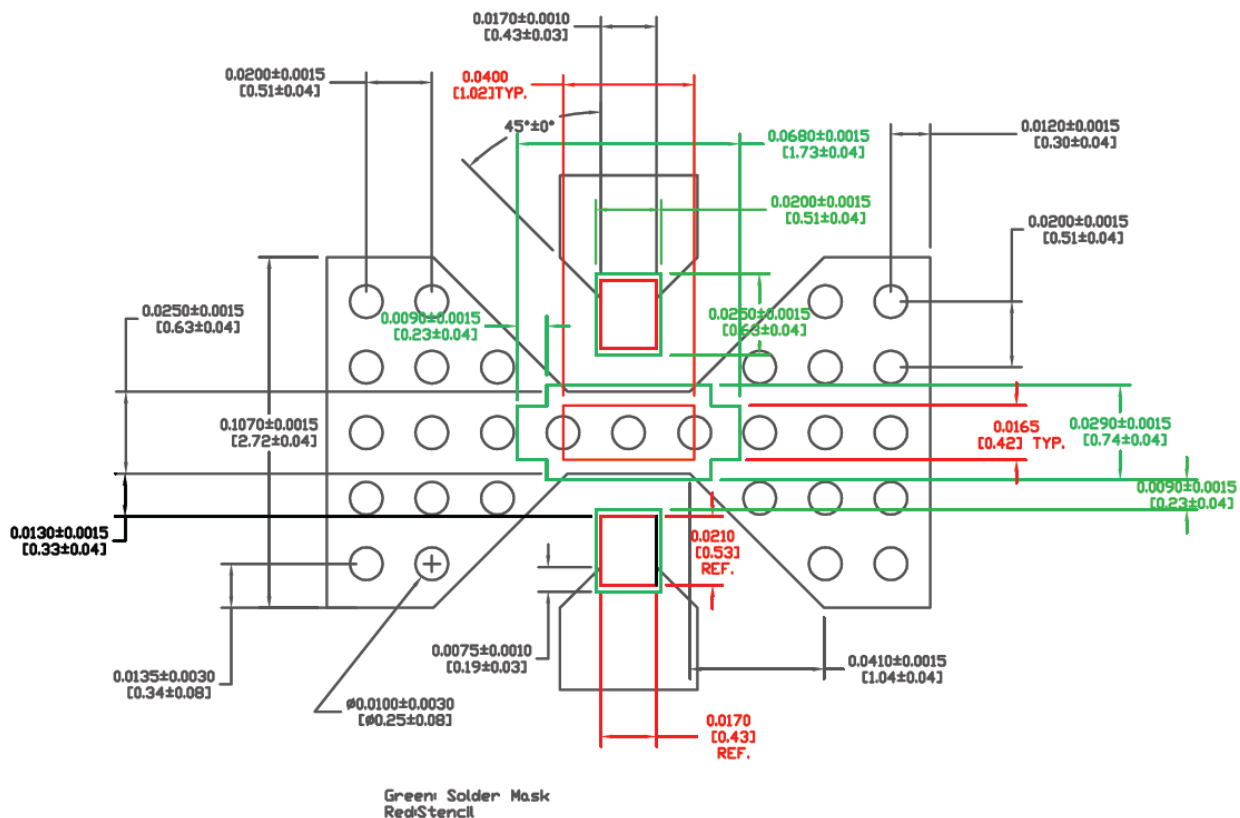


Assembly

If possible, use copper filled vias underneath pin 3 for better thermals; otherwise, use vias that are plated through, filled and plated over.


Solder mask should provide a 60 µm clearance between copper pad and solder mask underneath package and 125 µm clearance on outside edges of package. Rounded package pads should have matching rounded solder mask openings.

Use circles or squares for the thermal land stencil such that there is only 50% to 80% solder paste coverage.

Electrical Schematic

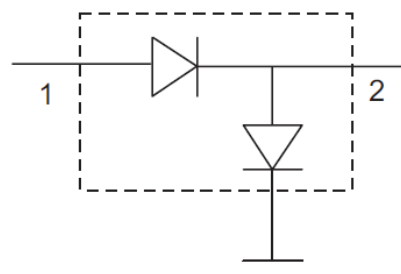

Outline: 2012 (molded plastic DFN)

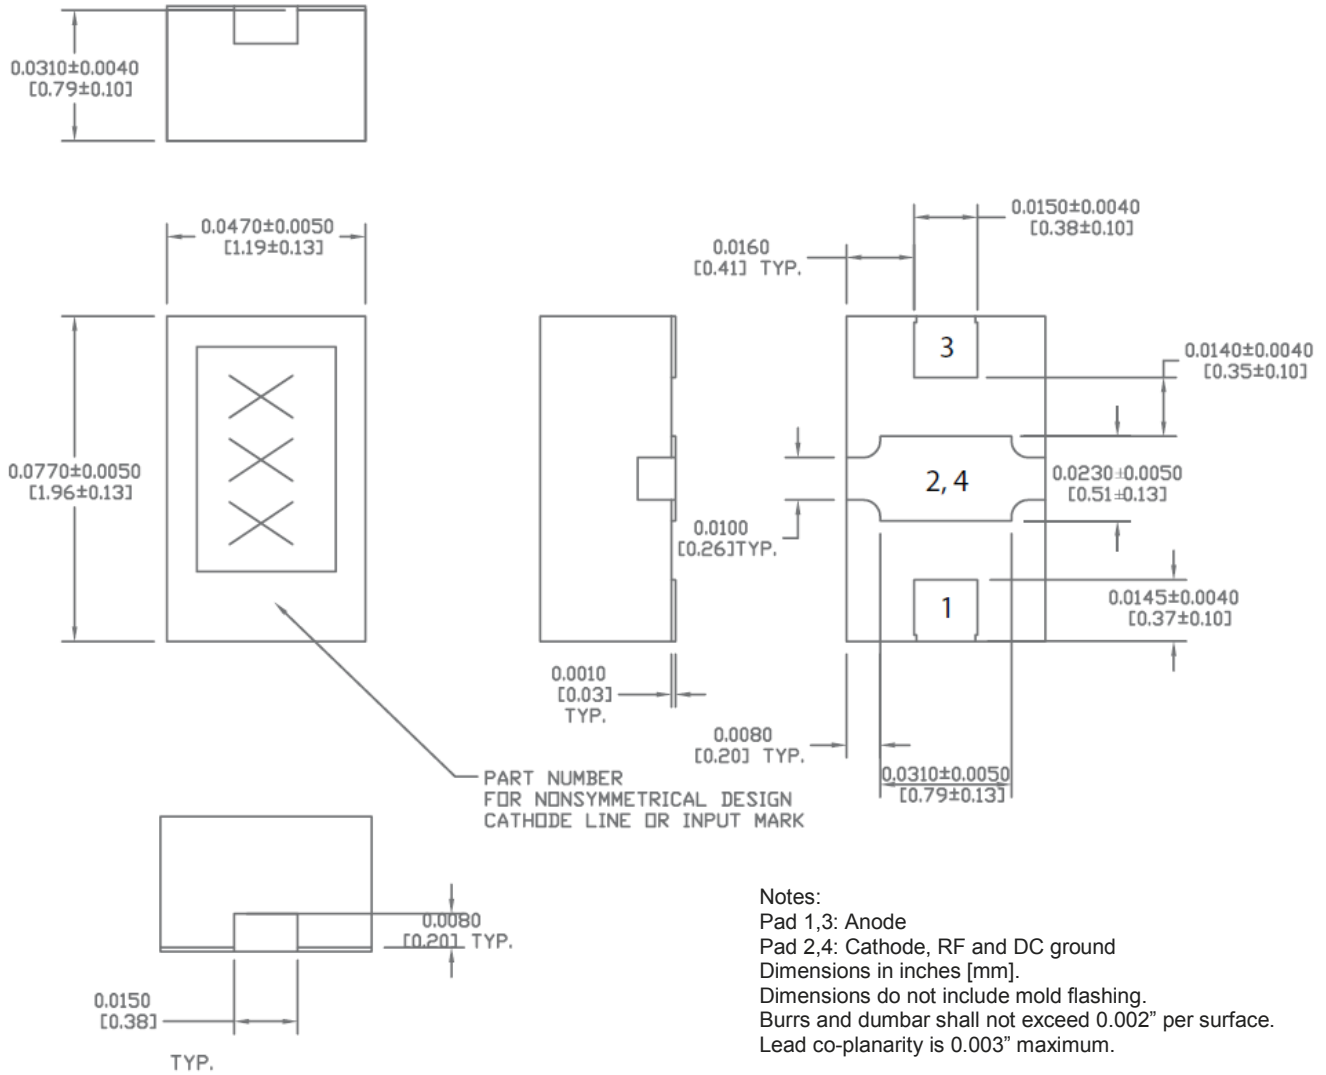

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.