



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DDR SDRAM SM ALL-OUTLINE DIM M


MT9VDDT1672H – 128M B,
MT9VDDT3272H – 256M B,
MT9VDDT6472H – 512M B,
MT9VDDT12872H – 1GB

For the latest data sheet, please refer to the Micron® Web site: www.micron.com/products/modules

Features

- 200-pin, small-outline, dual in-line memory module (SODIMM)
- Supports ECC error detection and correction
- Fast data transfer rates: PC1600, PC2100, or PC2700
- Utilizes 200 MT/s, 266 MT/s, and 333 MT/s DDR SDRAM components
- 128MB (16 Meg x 72), 256MB (32 Meg x 72), 512MB (64 Meg x 72), and 1GB (128 Meg x 72)
- VDD = VDDQ = +2.5V
- VDDSPD = +2.3V to +3.6V
- 2.5V I/O (SSTL_2 compatible)
- Commands entered on each positive CK edge
- DQS edge-aligned with data for READS; center-aligned with data for WRITES
- Internal, pipelined double data rate (DDR) architecture; two data accesses per clock cycle
- Bidirectional data strobe (DQS) transmitted/received with data—i.e., source-synchronous data capture
- Differential clock inputs CK and CK#
- Four internal device banks for concurrent operation
- Programmable burst lengths: 2, 4, or 8
- Auto precharge option
- Auto Refresh and Self Refresh Modes
- 15.625µs (128MB) or 7.8125µs (256MB, 512MB, 1GB) maximum average periodic refresh interval
- Serial Presence Detect (SPD) with EEPROM
- Programmable READ CAS latency
- Gold edge contacts

Figure 1: 200-Pin SODIMM (M O-224)

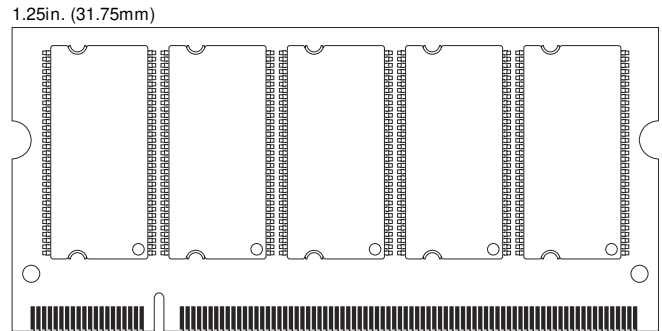

OPTIONS

- Operating Temperature Range
Commercial (0°C ≤ T_A ≤ +70°C)
Industrial (-40°C ≤ T_A ≤ +85°C)
- Package
200-pin SODIMM (standard)
200-pin SODIMM (lead-free)
- Memory clock, Speed, CAS Latency¹
6.0ns (167 MHz), 333 MT/s, CL = 2.5 -335
7.5ns (133 MHz), 266 MT/s, CL = 2 -262²
7.5ns (133 MHz), 266 MT/s, CL = 2 -26A²
7.5ns (133 MHz), 266 MT/s, CL = 2.5 -265
10ns (100 MHz), 200 MT/s, CL = 2 -202²
- PCB
1.25in. (31.75mm)

MARKING

None
I²
G
Y²

See page 2 note

NOTE: 1. CL = Device CAS (READ) Latency.
2. Consult Micron for product availability.

Table 1: Address Table

| | 128M B | 256M B | 512M B | 1GB |
|------------------------|--------------------|--------------------|--------------------|-------------------|
| Refresh Count | 4K | 8K | 8K | 8K |
| Row Addressing | 8K (A0–A11) | 8K (A0–A12) | 8K (A0–A12) | 16K (A0–A13) |
| Device Bank Addressing | 4 (BA0, BA1) | 4 (BA0, BA1) | 4 (BA0, BA1) | 4 (BA0, BA1) |
| Device Configuration | 128Mb (16 Meg x 8) | 256Mb (32 Meg x 8) | 512Mb (64 Meg x 8) | 1Gb (128 Meg x 8) |
| Column Addressing | 1K (A0–A9) | 1K (A0–A9) | 2K (A0–A9, A11) | 2K (A0–A9, A11) |
| Module Rank Addressing | 1 (S0#) | 1 (S0#) | 1 (S0#) | 1 (S0#) |



Table 2: Part Numbers and Timing Parameters

| PART NUMBER | MODULE DENSITY | CONFIGURATION | MODULE BANDWIDTH | MEMORY CLOCK/ DATA RATE | LATENCY (CL - t _{RCD} - t _{RP}) |
|-------------------------|----------------|---------------|------------------|----------------------------|---|
| MT9VDDT1672H(I)G-335__ | 128MB | 16 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT1672H(I)Y-335__ | 128MB | 16 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT1672H(I)G-262__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT1672H(I)Y-262__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT1672H(I)G-26A__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT1672H(I)Y-26A__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT1672H(I)G-265__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT1672H(I)Y-265__ | 128MB | 16 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT1672H(I)G-202__ | 128MB | 16 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT1672H(I)Y-202__ | 128MB | 16 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT3272H(I)G-335__ | 256MB | 32 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT3272H(I)Y-335__ | 256MB | 32 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT3272H(I)G-262__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT3272H(I)Y-262__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT3272H(I)G-26A__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT3272H(I)Y-26A__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT3272H(I)G-265__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT3272H(I)Y-265__ | 256MB | 32 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT3272H(I)G-202__ | 256MB | 32 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT3272H(I)Y-202__ | 256MB | 32 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT6472H(I)G-335__ | 512MB | 64 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT6472H(I)Y-335__ | 512MB | 64 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT6472H(I)G-262__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT6472H(I)Y-262__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT6472H(I)G-26A__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT6472H(I)Y-26A__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT6472H(I)G-265__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT6472H(I)Y-265__ | 512MB | 64 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT6472H(I)G-202__ | 512MB | 64 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT6472H(I)Y-202__ | 512MB | 64 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT12872H(I)G-335__ | 1GB | 128 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT12872H(I)Y-335__ | 1GB | 128 Meg x 72 | 2.7 GB/s | 6.0ns/333 MT/s | 2.5-3-3 |
| MT9VDDT12872H(I)G-262__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT12872H(I)Y-262__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-2-2 |
| MT9VDDT12872H(I)G-26A__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT12872H(I)Y-26A__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2-3-3 |
| MT9VDDT12872H(I)G-265__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT12872H(I)Y-265__ | 1GB | 128 Meg x 72 | 2.1 GB/s | 7.5ns/266 MT/s | 2.5-3-3 |
| MT9VDDT12872H(I)G-202__ | 1GB | 128 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |
| MT9VDDT12872H(I)Y-202__ | 1GB | 128 Meg x 72 | 1.6 GB/s | 10ns/200 MT/s | 2-2-2 |

NOTE:

All part numbers end with a two-place code (not shown), designating component and PCB revisions. Consult factory for current revision codes. Example: MT9VDDT3272HG-265A1.

Table 3: Pin Assignment (200-Pin SODIMM Front)

| PIN | SYMBOL | PIN | SYMBOL | PIN | SYMBOL | PIN | SYMBOL |
|-----|--------|-----|---------------------|-----|---------------------|-----|--------|
| 1 | VREF | 51 | Vss | 101 | A9 | 151 | DQ42 |
| 3 | Vss | 53 | DQ19 | 103 | Vss | 153 | DQ43 |
| 5 | DQ0 | 55 | DQ24 | 105 | A7 | 155 | Vdd |
| 7 | DQ1 | 57 | VDD | 107 | A5 | 157 | Vdd |
| 9 | VDD | 59 | DQ25 | 109 | A3 | 159 | Vss |
| 11 | DQS0 | 61 | DQS3 | 111 | A1 | 161 | Vss |
| 13 | DQ2 | 63 | Vss | 113 | VDD | 163 | DQ48 |
| 15 | Vss | 65 | DQ26 | 115 | A10 | 165 | DQ49 |
| 17 | DQ3 | 67 | DQ27 | 117 | BA0 | 167 | VDD |
| 19 | DQ8 | 69 | VDD | 119 | WE# | 169 | DQS6 |
| 21 | VDD | 71 | CB0 | 121 | SO# | 171 | DQ50 |
| 23 | DQ9 | 73 | CB1 | 123 | NC/A13 ² | 173 | Vss |
| 25 | DQS1 | 75 | Vss | 125 | Vss | 175 | DQ51 |
| 27 | Vss | 77 | DQS8 | 127 | DQ32 | 177 | DQ56 |
| 29 | DQ10 | 79 | CB2 | 129 | DQ33 | 179 | VDD |
| 31 | DQ11 | 81 | VDD | 131 | VDD | 181 | DQ57 |
| 33 | VDD | 83 | CB3 | 133 | DQS4 | 183 | DQS7 |
| 35 | CK0 | 85 | NC | 135 | DQ34 | 185 | Vss |
| 37 | CK0# | 87 | Vss | 137 | Vss | 187 | DQ58 |
| 39 | Vss | 89 | CK2 | 139 | DQ35 | 189 | DQ59 |
| 41 | DQ16 | 91 | CK2# | 141 | DQ40 | 191 | VDD |
| 43 | DQ17 | 93 | VDD | 143 | VDD | 193 | SDA |
| 45 | VDD | 95 | NC | 145 | DQ41 | 195 | SCL |
| 47 | DQS2 | 97 | NC | 147 | DQS5 | 197 | VDDSPD |
| 49 | DQ18 | 99 | NC/A12 ¹ | 149 | Vss | 199 | NC |

Table 4: Pin Assignment (200-pin SODIMM Back)

| PIN | SYMBOL | PIN | SYMBOL | PIN | SYMBOL | PIN | SYMBOL |
|-----|--------|-----|--------|-----|--------|-----|--------|
| 2 | VREF | 52 | Vss | 102 | A8 | 152 | DQ46 |
| 4 | Vss | 54 | DQ23 | 104 | Vss | 154 | DQ47 |
| 6 | DQ4 | 56 | DQ28 | 106 | A6 | 156 | VDD |
| 8 | DQ5 | 58 | VDD | 108 | A4 | 158 | CK1# |
| 10 | VDD | 60 | DQ29 | 110 | A2 | 160 | CK1 |
| 12 | DM0 | 62 | DM3 | 112 | A0 | 162 | Vss |
| 14 | DQ6 | 64 | Vss | 114 | VDD | 164 | DQ52 |
| 16 | Vss | 66 | DQ30 | 116 | BA1 | 166 | DQ53 |
| 18 | DQ7 | 68 | DQ31 | 118 | RAS# | 168 | VDD |
| 20 | DQ12 | 70 | VDD | 120 | CAS# | 170 | DM6 |
| 22 | VDD | 72 | CB4 | 122 | NC | 172 | DQ54 |
| 24 | DQ13 | 74 | CB5 | 124 | NC | 174 | Vss |
| 26 | DM1 | 76 | Vss | 126 | Vss | 176 | DQ55 |
| 28 | Vss | 78 | DM8 | 128 | DQ36 | 178 | DQ60 |
| 30 | DQ14 | 80 | CB6 | 130 | DQ37 | 180 | VDD |
| 32 | DQ15 | 82 | VDD | 132 | VDD | 182 | DQ61 |
| 34 | VDD | 84 | CB7 | 134 | DM4 | 184 | DM7 |
| 36 | VDD | 86 | NC | 136 | DQ38 | 186 | Vss |
| 38 | Vss | 88 | Vss | 138 | Vss | 188 | DQ62 |
| 40 | Vss | 90 | Vss | 140 | DQ39 | 190 | DQ63 |
| 42 | DQ20 | 92 | VDD | 142 | DQ44 | 192 | VDD |
| 44 | DQ21 | 94 | VDD | 144 | VDD | 194 | SA0 |
| 46 | VDD | 96 | CKE0 | 146 | DQ45 | 196 | SA1 |
| 48 | DM2 | 98 | NC | 148 | DM5 | 198 | SA2 |
| 50 | DQ22 | 100 | A11 | 150 | Vss | 200 | NC |

NOTE:

- Pin 99 is NC for 128MB and A12 for 256MB, 512MB, and 1GB.
- Pin 123 is NC for 128MB, 256MB, and 512MB and A13 for 1GB.

Figure 2: Module Layout

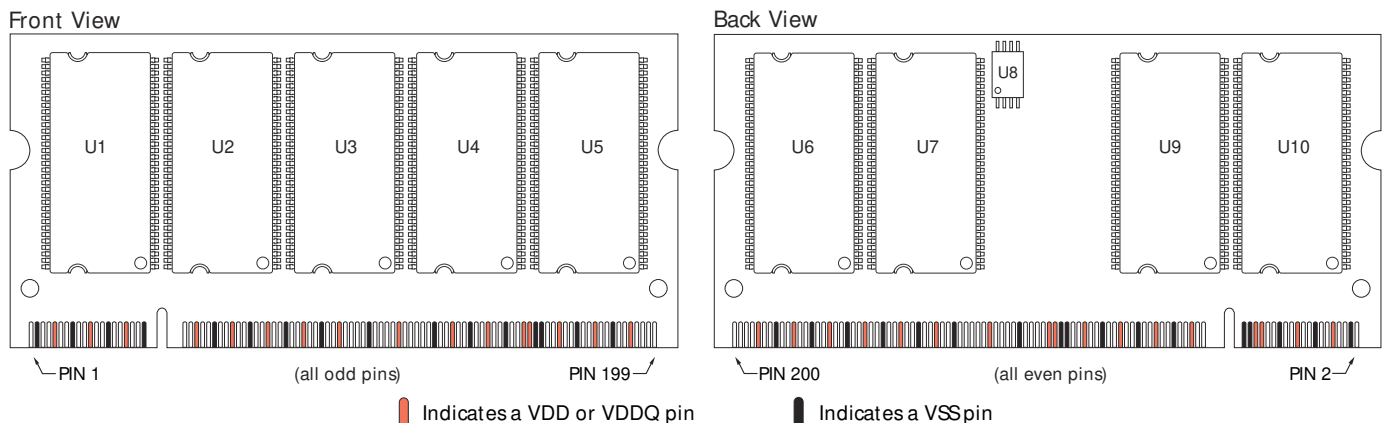


Table 5: Pin Descriptions

Pin numbers may not correlate with symbols; refer to Pin Assignment Tables on page 3 for more information


| PIN NUMBERS | SYMBOL | TYPE | DESCRIPTION |
|--|--|------------------|---|
| 118, 119, 120 | WE#, CAS#, RAS# | Input | Command Inputs: RAS#, CAS#, and WE# (along with S#) define the command being entered. |
| 35, 37, 89, 91, 158, 160 | CK0, CK0#, CK1, CK1#, CK2, CK2# | Input | Clock: CK, CK# are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK, and negative edge of CK#. Output data (DQs and DQS) is referenced to the crossings of CK and CK#. |
| 96 | CKE0 | Input | Clock Enable: CKE HIGH activates and CKE LOW deactivates the internal clock, input buffers and output drivers. Taking CKE LOW provides PRECHARGE POWER-DOWN and SELF REFRESH operations (all device banks idle), or ACTIVE POWER-DOWN (row ACTIVE in any device bank). CKE is synchronous for POWER-DOWN entry and exit, and for SELF REFRESH entry. CKE is asynchronous for SELF REFRESH exit and for disabling the outputs. CKE must be maintained HIGH throughout read and write accesses. Input buffers (excluding CK, CK# and CKE) are disabled during POWER-DOWN. Input buffers (excluding CKE) are disabled during SELF REFRESH. CKE is an SSTL_2 input but will detect an LVCMOSLOW level after VDD is applied. |
| 121 | S0# | Input | Chip Selects: S# enables (registered LOW) and disables (registered HIGH) the command decoder. All commands are masked when S# is registered HIGH. S# is considered part of the command code. |
| 116, 117 | BA0, BA1 | Input | Bank Address: BA0, BA1 define to which device bank an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. |
| 99 (256MB, 512MB, 1GB), 100, 101, 102, 105, 106, 107, 108, 109, 110, 111, 112, 115, 123 (1GB) | A0–A11 (128MB) A0–A12 (256MB, 512MB) A0–A13 (1GB) | Input | Address Inputs: Provide the row address for ACTIVE commands, and the column address and auto precharge bit (A10) for READ/WRITE commands, to select one location out of the memory array in the respective device bank. A10 sampled during a PRECHARGE command determines whether the PRECHARGE applies to one device bank (A10 LOW, device bank selected by BA0, BA1) or all device banks (A10 HIGH). The address inputs also provide the op-code during a MODE REGISTER SET command. BA0 and BA1 define which mode register (mode register or extended mode register) is loaded during the LOAD MODE REGISTER command. |
| 11, 25, 47, 61, 77, 133, 147, 169, 183 | DQS0–DQS8 | Input/ Output | Data Strobe: Output with READ data, input with WRITE data. DQS is edge-aligned with READ data, centered in WRITE data. Used to capture data. |
| 12, 26, 48, 62, 78, 134, 148, 170, 184 | DM0–DM8 | Input | Data Mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH along with that input data during a WRITE access. DM is sampled on both edges of DQS. Although DM pins are input-only, the DM loading is designed to match that of DQ and DQS pins. |
| 71, 72, 73, 74, 79, 80, 83, 84 | CB0–CB7 | Input/ Output | Check Bits. |
| 5–8, 13–20, 23–24, 29–32, 41–44, 49–50, 53–56, 59–60, 65–68, 127–130, 135–136, 139–142, 145–146, 151–154, 163–166, 171–172, 175–178, 181–182, 187–190 | DQ0–DQ63 | Input/ Output | Data I/Os: Data bus. |

Table 5: Pin Descriptions (Continued)

Pin numbers may not correlate with symbols; refer to Pin Assignment Tables on page 3 for more information

| PIN NUMBERS | SYMBOL | TYPE | DESCRIPTION |
|---|---------|------------------|--|
| 195 | SCL | Input | Serial Clock for Presence-Detect: SCL is used to synchronize the presence-detect data transfer to and from the module. |
| 194, 196, 198 | SA0-SA2 | Input | Presence-Detect Address Inputs: These pins are used to configure the presence-detect device. |
| 193 | SDA | Input/ Output | Serial Presence-Detect Data: SDA is a bidirectional pin used to transfer addresses and data into and out of the presence-detect portion of the module. |
| 1, 2 | VREF | Supply | SSTL_2 reference voltage. |
| 9-10, 21-22, 33-34, 36, 45-46, 57-58, 69-70, 81-82, 92-94, 113-114, 131-132, 143-144, 155-157, 167-168, 17-180, 191-192 | VDD | Supply | Power Supply: +2.5V ±0.2V. |
| 3-4 15-16, 27-28, 38-40, 51-52, 63-64, 75-76, 87-88, 90, 103-104, 125-126, 137-138, 149-150, 159, 161-162, 173-174, 185-186 | VSS | Supply | Ground. |
| 197 | VDDSPD | Supply | Serial EEPROM positive power supply: +2.3V to +3.6V. |
| 85, 95, 97, 122, 123 (128MB, 256MB, 512MB), 199 (128MB), 98, 124, 200 | NC | — | No Connect: These pins should be left unconnected. |

Figure 3: Functional Block Diagram

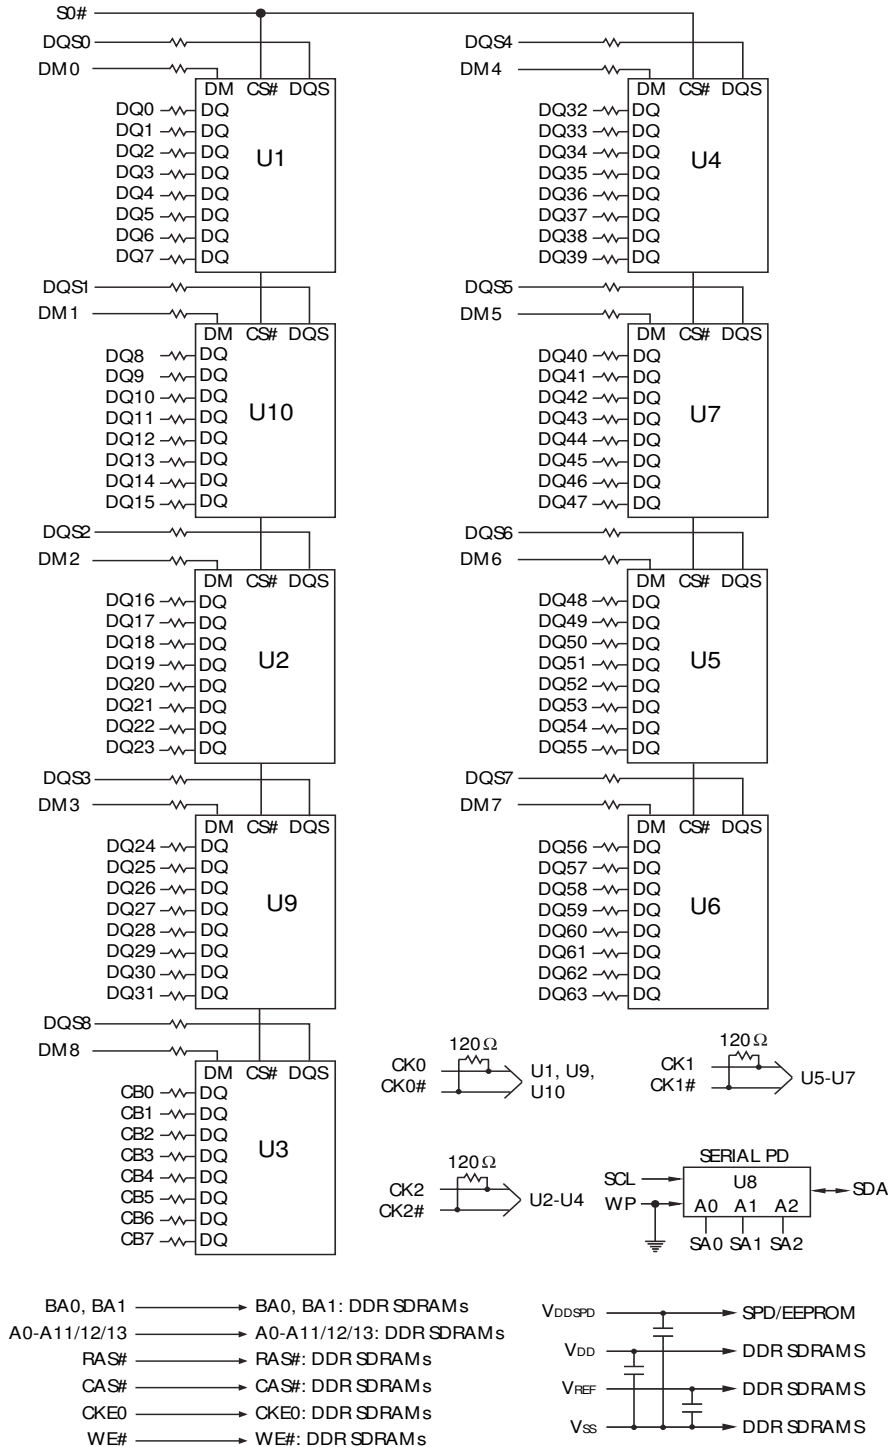

NOTE:

1. All resistor values are 22Ω unless otherwise specified.
2. Per industry standard, Micron modules utilize various component speed grades, as referenced in the module part numbering guide at www.micron.com/numberguide.

Standard modules use the following DDR SDRAM devices:
MT46V16M8TG (128MB); MT46V32M8TG (256MB); MT46V64M8TG (512MB); MT46V128M8TG (1GB)

Lead-free modules use the following DDR SDRAM devices:
MT46V16M8P (128MB); MT46V32M8P (256MB); MT46V64M8P (512MB); MT46V128M8P (1GB)

Contact Micron for availability of IT modules.

General Description

The MT9VDDT1672H, MT9VDDT3272H, MT9VDDT6472H, and MT9VDDT12872H are high-speed CMOS, dynamic random-access, 128MB, 256MB, 512MB, and 1GB memory modules organized in x72 (ECC) configuration. DDR SDRAM modules use internally configured quad-bank DDR SDRAM devices.

DDR SDRAM modules use a double data rate architecture to achieve high-speed operation. The double data rate architecture is essentially a $2n$ -prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. A single read or write access for the DDR SDRAM module effectively consists of a single $2n$ -bit wide, one-clock-cycle data transfer at the internal DRAM core and two corresponding n -bit wide, one-half-clock-cycle data transfers at the I/O pins.

A bidirectional data strobe (DQS) is transmitted externally, along with data, for use in data capture at the receiver. DQS is an intermittent strobe transmitted by the DDR SDRAM during READs and by the memory controller during WRITEs. DQS is edge-aligned with data for READs and center-aligned with data for WRITEs.

DDR SDRAM modules operate from differential clock inputs (CK and CK#); the crossing of CK going HIGH and CK# going LOW will be referred to as the positive edge of CK. Commands (address and control signals) are registered at every positive edge of CK. Input data is registered on both edges of DQS, and output data is referenced to both edges of DQS, as well as to both edges of CK.

Read and write accesses to DDR SDRAM modules are burst oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. Accesses begin with the registration of an ACTIVE command, which is then followed by a READ or WRITE command. The address bits registered coincident with the ACTIVE command are used to select the device bank and row to be accessed (BA0, BA1 select device bank; A0–A11 select device row for 128MB; A0–A12 select device row for 256MB and 512MB; A0–A13 select device row for 1GB). The address bits registered coincident with the READ or WRITE command are used to select the device bank and the starting device column location for the burst access.

DDR SDRAM modules provide for programmable READ or WRITE burst lengths of 2, 4, or 8 locations. An auto precharge function may be enabled to provide a self-timed row precharge that is initiated at the end of the burst access.

The pipelined, multibank architecture of DDR SDRAM modules allows for concurrent operation, thereby providing high effective bandwidth by hiding row precharge and activation time.

An auto refresh mode is provided, along with a power-saving power-down mode. All inputs are compatible with the JEDEC Standard for SSTL_2. All outputs are SSTL_2, Class II compatible. For more information regarding DDR SDRAM operation, refer to the 128Mb, 256Mb, 512Mb, or 1Gb DDR SDRAM component data sheets.

Serial Presence-Detect Operation

DDR SDRAM modules incorporate serial presence-detect (SPD). The SPD function is implemented using a 2,048-bit EEPROM. This nonvolatile storage device contains 256 bytes. The first 128 bytes can be programmed by Micron to identify the module type and various SDRAM organizations and timing parameters. The remaining 128 bytes of storage are available for use by the customer. System READ/WRITE operations between the system logic and the module EEPROM device occur via a standard I²C bus using the DIMM's SCL (clock) and SDA (data) signals, together with SA (2:0), which provide eight unique DIMM/EEPROM addresses. Write protect (WP) is tied to ground on the module, permanently disabling hardware write protect.

Mode Register Definition

The mode register is used to define the specific mode of operation of DDR SDRAM devices. This definition includes the selection of a burst length, a burst type, a CAS latency and an operating mode, as shown in Figure 4, Mode Register Definition Diagram, on page 8. The mode register is programmed via the MODE REGISTER SET command (with BA0 = 0 and BA1 = 0) and will retain the stored information until it is programmed again or the device loses power (except for bit A8, which is self-clearing).

Reprogramming the mode register will not alter the contents of the memory, provided it is performed correctly. The mode register must be loaded (reloaded) when all device banks are idle and no bursts are in progress, and the controller must wait the specified time before initiating the subsequent operation. Violating either of these requirements will result in unspecified operation.

Mode register bits A0–A2 specify the burst length, A3 specifies the type of burst (sequential or interleaved), A4–A6 specify the CAS latency, and A7–A11 (128MB), A7–A12 (256MB, 512MB) or A7–A13 (1GB) specify the operating mode.

Burst Length

Read and write accesses to DDR SDRAM devices are burst oriented, with the burst length being programmable, as shown in Mode Register Diagram. The burst length determines the maximum number of column locations that can be accessed for a given READ or WRITE command. Burst lengths of 2, 4, or 8 locations are available for both the sequential and the interleaved burst types.

Reserved states should not be used, as unknown operation or incompatibility with future versions may result.

When a READ or WRITE command is issued, a block of columns equal to the burst length is effectively selected. All accesses for that burst take place within this block, meaning that the burst will wrap within the block if a boundary is reached. The block is uniquely selected by A1–Ai when the burst length is set to two, by A2–Ai when the burst length is set to four and by A3–Ai when the burst length is set to eight (where Ai is the most significant column address bit for a given configuration; see Note 5 of Table 6, Burst Definition Table, on page 9). The remaining (least significant) address bit(s) is (are) used to select the starting location within the block. The programmed burst length applies to both READ and WRITE bursts.

Burst Type

Accesses within a given burst may be programmed to be either sequential or interleaved; this is referred to as the burst type and is selected via bit M3.

The ordering of accesses within a burst is determined by the burst length, the burst type and the starting column address, as shown in Table 6, Burst Definition Table, on page 9.

Read Latency

The READ latency is the delay, in clock cycles, between the registration of a READ command and the availability of the first bit of output data. The latency can be set to 2 or 2.5 clocks, as shown in Figure 5, CAS Latency Diagram, on page 9.

If a READ command is registered at clock edge *n*, and the latency is *m* clocks, the data will be available nominally coincident with clock edge *n + m*. Table 7, CAS Latency (CL) Table, indicates the operating fre-

quencies at which each CAS latency setting can be used.

Figure 4: Mode Register Definition Diagram

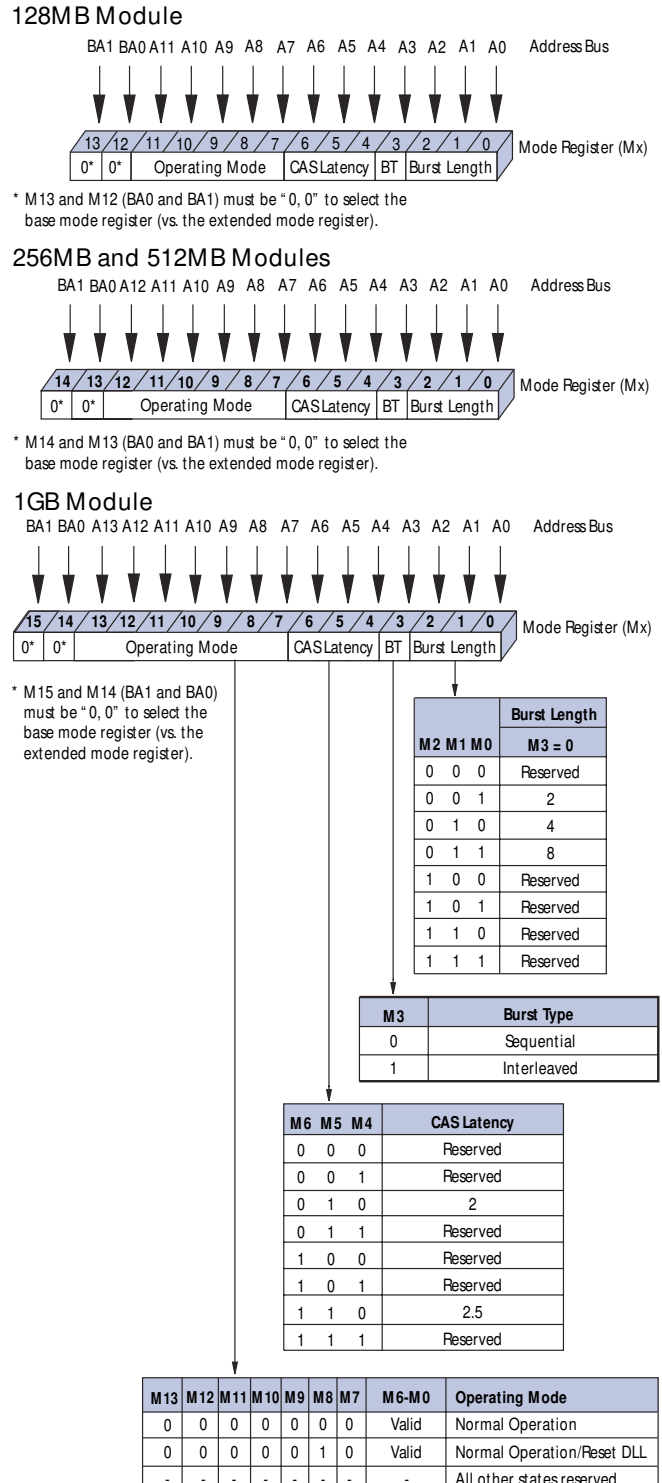


Table 6: Burst Definition Table

| BURST LENGTH | STARTING COLUMN ADDRESS | | | ORDER OF ACCESSES WITHIN A BURST | |
|--------------|-------------------------|---|---|----------------------------------|--------------------|
| | | | | TYPE = SEQUENTIAL | TYPE = INTERLEAVED |
| 2 | A0 | | | | |
| | 0 | | | 0-1 | 0-1 |
| | 1 | | | 1-0 | 1-0 |
| 4 | A1 A0 | | | | |
| | 0 | 0 | | 0-1-2-3 | 0-1-2-3 |
| | 0 | 1 | | 1-2-3-0 | 1-0-3-2 |
| | 1 | 0 | | 2-3-0-1 | 2-3-0-1 |
| | 1 | 1 | | 3-0-1-2 | 3-2-1-0 |
| 8 | A2 A1 A0 | | | | |
| | 0 | 0 | 0 | 0-1-2-3-4-5-6-7 | 0-1-2-3-4-5-6-7 |
| | 0 | 0 | 1 | 1-2-3-4-5-6-7-0 | 1-0-3-2-5-4-7-6 |
| | 0 | 1 | 0 | 2-3-4-5-6-7-0-1 | 2-3-0-1-6-7-4-5 |
| | 0 | 1 | 1 | 3-4-5-6-7-0-1-2 | 3-2-1-0-7-6-5-4 |
| | 1 | 0 | 0 | 4-5-6-7-0-1-2-3 | 4-5-6-7-0-1-2-3 |
| | 1 | 0 | 1 | 5-6-7-0-1-2-3-4 | 5-4-7-6-1-0-3-2 |
| | 1 | 1 | 0 | 6-7-0-1-2-3-4-5 | 6-7-4-5-2-3-0-1 |
| | 1 | 1 | 1 | 7-0-1-2-3-4-5-6 | 7-6-5-4-3-2-1-0 |


NOTE:

- For a burst length of two, A1–Ai select the two-data-element block; A0 selects the first access within the block.
- For a burst length of four, A2–Ai select the four-data-element block; A0–A1 select the first access within the block.
- For a burst length of eight, A3–Ai select the eight-data-element block; A0–A2 select the first access within the block.
- Whenever a boundary of the block is reached within a given sequence above, the following access wraps within the block.
- i = 9 for 128MB, 256MB;
i = 9, 11 for 512MB, 1GB.

Table 7: CAS Latency (CL) Table

| SPEED | ALLOWABLE OPERATING CLOCK FREQUENCY (MHZ) | |
|-------|---|--------------|
| | CL = 2 | CL = 2.5 |
| -335 | 75 ≤ f ≤ 133 | 75 ≤ f ≤ 167 |
| -262 | 75 ≤ f ≤ 133 | 75 ≤ f ≤ 133 |
| -26A | 75 ≤ f ≤ 133 | 75 ≤ f ≤ 133 |
| -265 | 75 ≤ f ≤ 100 | 75 ≤ f ≤ 133 |
| -202 | 75 ≤ f ≤ 100 | N/A |

Figure 5: CAS Latency Diagram

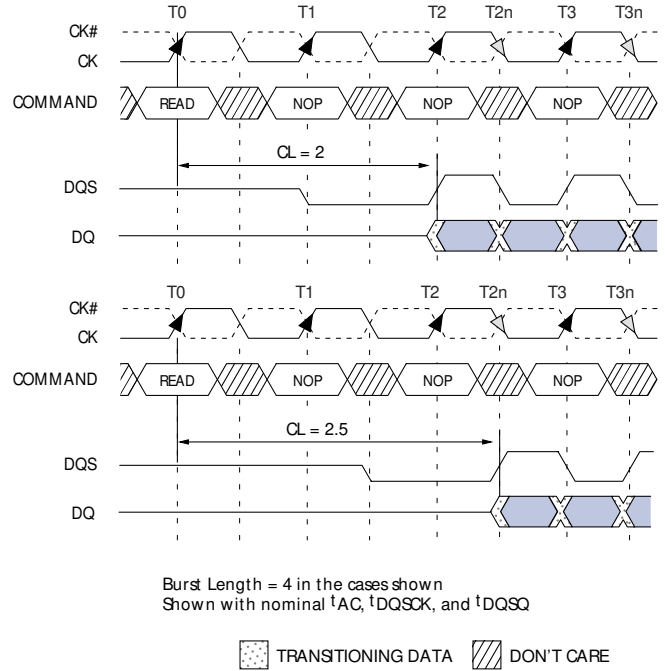

Reserved states should not be used as unknown operation or incompatibility with future versions may result.

Operating Mode

The normal operating mode is selected by issuing a MODE REGISTER SET command with bits A7–A11 (128MB), A7–A12 (256MB, 512MB) or A7–A13 (1GB) each set to zero, and bits A0–A6 set to the desired values. A DLL reset is initiated by issuing a MODE REGISTER SET command with bits A7 and A9–A11 (128MB); A7 and A9–A12 (256MB, 512MB); or A7 and A9–A13 (1GB) each set to zero, bit A8 set to one, and bits A0–A6 set to the desired values. Although not required by the Micron device, JEDEC specifications recommend when a LOAD MODE REGISTER command is issued to reset the DLL, it should always be followed by a LOAD MODE REGISTER command to select normal operating mode.

All other combinations of values for A7–A11 (128MB); A7–A12 (256MB, 512MB); or A7–A13 (1GB) are reserved for future use and/or test modes. Test modes and reserved states should not be used because unknown operation or incompatibility with future versions may result.

Extended Mode Register


The extended mode register controls functions beyond those controlled by the mode register; these additional functions are DLL enable/disable and output drive strength. These functions are controlled via the bits shown in Figure 6, Extended Mode Register Definition Diagram. The extended mode register is programmed via the LOAD MODE REGISTER command to the mode register (with BA0 = 1 and BA1 = 0) and will retain the stored information until it is programmed again or the device loses power. The enabling of the DLL should always be followed by a LOAD MODE REGISTER command to the mode register (BA0/BA1 both LOW) to reset the DLL.

The extended mode register must be loaded when all device banks are idle and no bursts are in progress, and the controller must wait the specified time before initiating any subsequent operation. Violating either of these requirements could result in unspecified operation.

DLL Enable/Disable

The DLL must be enabled for normal operation. DLL enable is required during power-up initialization and upon returning to normal operation after having disabled the DLL for the purpose of debug or evaluation. (When the device exits self refresh mode, the DLL is enabled automatically.) Any time the DLL is enabled, 200 clock cycles with CKE HIGH must occur before a READ command can be issued.

Figure 6: Extended Mode Register Definition Diagram

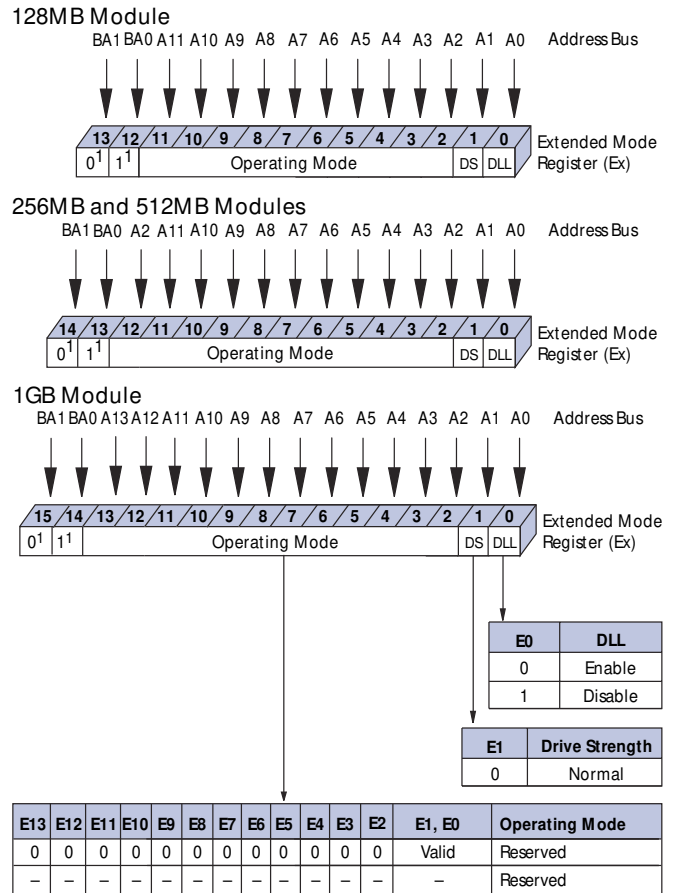

NOTE:

1. BA1 and BA0 (E13 and E12 for 128MB, E14 and E13 for 256MB, 512MB, or E15 and E14 for 1GB) must be "0, 1" to select the Extended Mode Register (vs. the base Mode Register).
2. QFC# is not supported.



Commands

Table 8, Commands Truth Table, and Table 9, DM Operation Truth Table, provide a general reference of available commands. For a more detailed description

of commands and operations, refer to the 128Mb, 256Mb, 512Mb, or 1Gb DDR SDRAM component data sheets.

Table 8: Commands Truth Table

CKE is HIGH for all commands shown except SELF REFRESH; all states and sequences not shown are illegal or reserved

| NAME (FUNCTION) | CS# | RAS# | CAS# | WE# | ADDRESS | NOTES |
|---|-----|------|------|-----|----------|-------|
| DESELECT (NOP) | H | X | X | X | X | 1 |
| NO OPERATION (NOP) | L | H | H | H | X | 1 |
| ACTIVE (Select bank and activate row) | L | L | H | H | Bank/Row | 2 |
| READ (Select bank and column, and start READ burst) | L | H | L | H | Bank/Col | 3 |
| WRITE (Select bank and column, and start WRITE burst) | L | H | L | L | Bank/Col | 3 |
| BURST TERMINATE | L | H | H | L | X | 4 |
| PRECHARGE (Deactivate row in bank or banks) | L | L | H | L | Code | 5 |
| AUTO REFRESH or SELF REFRESH (Enter self refresh mode) | L | L | L | H | X | 6, 7 |
| LOAD MODE REGISTER | L | L | L | L | Op-Code | 8 |

NOTE:

1. Deselect and NOP are functionally interchangeable.
2. BA0–BA1 provide device bank address and A0–A11 (128MB), A0–A12 (256MB, 512MB) or A0–A13 (1GB) provide row address.
3. BA0–BA1 provide device bank address; A0–A9 (128MB, 256MB) or A0–A9,11 (512MB, 1GB), provide column address; A10 HIGH enables the auto precharge feature (nonpersistent), and A10 LOW disables the auto precharge feature.
4. Applies only to read bursts with auto precharge disabled; this command is undefined (and should not be used) for READ bursts with auto precharge enabled and for WRITE bursts.
5. A10 LOW: BA0–BA1 determine which device bank is precharged. A10 HIGH: all device banks are precharged and BA0–BA1 are “Don’t Care.”
6. This command is AUTO REFRESH if CKE is HIGH, SELF REFRESH if CKE is LOW.
7. Internal refresh counter controls row addressing; all inputs and I/Os are “Don’t Care” except for CKE.
8. BA0–BA1 select either the mode register or the extended mode register (BA0 = 0, BA1 = 0 select the mode register; BA0 = 1, BA1 = 0 select extended mode register; other combinations of BA0–BA1 are reserved). A0–A11 (128MB), A0–A12 (256MB, 512MB) or A0–A13 (1GB) provide the op-code to be written to the selected mode register.

Table 9: DM Operation Truth Table

Used to mask write data; provided coincident with the corresponding data

| NAME (FUNCTION) | DM | DQS |
|-----------------|----|-------|
| WRITE Enable | L | Valid |
| WRITE Inhibit | H | X |



Absolute Maximum Ratings

Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions above those indicated in the opera-

tional sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

- VDD Supply Voltage
Relative to VSS.....-1V to +3.6V
- VDDQ Supply Voltage
Relative to VSS..... -1V to +3.6V
- VREF and Inputs Voltage
Relative to VSS..... -1V to +3.6V
- I/O Pin Voltage
Relative to VSS..... -0.5V to VDDQ +0.5V

- Operating Temperature,
T_A (ambient - commercial) 0°C to +70°C
- T_A (ambient - industrial) -40°C to +85°C
- Storage Temperature (plastic) -55°C to +150°C
- Short Circuit Output Current..... 50mA

Table 10: DC Electrical Characteristics and Operating Conditions

Notes: 1-5, 14; notes appear on pages 20-23; 0°C ≤ T_A ≤ +70°C

| PARAMETER/CONDITION | SYMBOL | MIN | MAX | UNITS | NOTES | |
|--|---|-----------------|-------------|-------|------------|--------|
| Supply Voltage | VDD | 2.3 | 2.7 | V | 32, 36 | |
| I/O Supply Voltage | VDDQ | 2.3 | 2.7 | V | 32, 36, 39 | |
| I/O Reference Voltage | VREF | 0.49 x VDDQ | 0.51 x VDDQ | V | 6, 39 | |
| I/O Termination Voltage (system) | VTT | VREF - 0.04 | VREF + 0.04 | V | 7, 39 | |
| Input High (Logic 1) Voltage | V _{IH} (DC) | VREF + 0.15 | VDD + 0.3 | V | 25 | |
| Input Low (Logic 0) Voltage | V _{IL} (DC) | -0.3 | VREF - 0.15 | V | 25 | |
| INPUT LEAKAGE CURRENT Any input 0V ≤ V _{IN} ≤ VDD, VREF pin 0V ≤ V _{IN} ≤ 1.35V (All other pins not under test = 0V) | Command/ Address, RAS#, CAS#, WE#, CKE, S# | -18 | 18 | μA | 46 | |
| | CK, CK# | | | | | |
| | DM | | | | | |
| OUTPUT LEAKAGE CURRENT (DQs are disabled; 0V ≤ V _{OUT} ≤ VDDQ) | DQ, DQS | I _{OZ} | -5 | 5 | μA | 46 |
| OUTPUT LEVELS | | I _{OH} | -16.8 | - | mA | 33, 34 |
| High Current (V _{OUT} = VDDQ - 0.373V, minimum VREF, minimum VTT) Low Current (V _{OUT} = 0.373V, maximum VREF, maximum VTT) | | I _{OL} | 16.8 | - | mA | |

Table 11: AC Input Operating Conditions

Notes: 1-5, 12, 48; notes appear on pages 20-23; 0°C ≤ T_A ≤ +70°C; VDD = VDDQ = +2.5V ±0.2V

| PARAMETER/CONDITION | SYMBOL | MIN | MAX | UNITS | NOTES |
|------------------------------|----------------------|--------------|--------------|-------|--------|
| Input High (Logic 1) Voltage | V _{IH} (AC) | VREF + 0.310 | - | V | 25, 35 |
| Input Low (Logic 0) Voltage | V _{IL} (AC) | - | VREF - 0.310 | V | 25, 35 |
| I/O Reference Voltage | VREF(AC) | 0.49 x VDDQ | 0.51 x VDDQ | V | 6 |

Table 12: IDD Specifications and Conditions – 128M B

DDR SDRAM components only

 Notes: 1–5, 8, 10, 12, 47; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| PARAMETER/CONDITION | SYMBOL | MAX | | | UNITS | NOTES | |
|--|----------------------------------|-------|-------|------------------------|-------|------------|--------|
| | | -335 | -262 | -26A/ -265/ -202 | | | |
| OPERATING CURRENT: One device bank; Active-Precharge; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles | IDD0 | 1,125 | 990 | 945 | mA | 20, 41 | |
| OPERATING CURRENT: One device bank; Active -Read Precharge; Burst = 2; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$; Address and control inputs changing once per clock cycle | IDD1 | 1,215 | 1,080 | 1,080 | mA | 20, 41 | |
| PRECHARGE POWER-DOWN STANDBY CURRENT: All device banks idle; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = (LOW) | IDD2P | 27 | 27 | 27 | mA | 21, 28, 43 | |
| IDLE STANDBY CURRENT: CS# = HIGH; All device banks idle; $t_{CK} = t_{CK}(\text{MIN})$; CKE = HIGH; Address and other control inputs changing once per clock cycle. $V_{IN} = V_{REF}$ for DQ, DQS, and DM | IDD2F | 405 | 405 | 360 | mA | 46 | |
| ACTIVE POWER-DOWN STANDBY CURRENT: One device bank active; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = LOW | IDD3P | 225 | 225 | 180 | mA | 21, 28, 43 | |
| ACTIVE STANDBY CURRENT: CS# = HIGH; CKE = HIGH; One device bank; Active-Precharge; $t_{RC} = t_{RAS}(\text{MAX})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle | IDD3N | 450 | 450 | 405 | mA | | |
| OPERATING CURRENT: Burst = 2; Reads; Continuous burst; One bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$ | IDD4R | 1,260 | 1,170 | 1,125 | mA | 20, 41 | |
| OPERATING CURRENT: Burst = 2; Writes; Continuous burst; One device bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM, and DQS inputs changing twice per clock cycle | IDD4W | 1,260 | 1,125 | 1,080 | mA | 20 | |
| AUTO REFRESH CURRENT | $t_{REFC} = t_{RFC}(\text{MIN})$ | IDD5 | 2,385 | 1,980 | 1,980 | mA | 20, 43 |
| | $t_{REFC} = 15.625\mu\text{s}$ | IDD5A | 45 | 45 | 45 | mA | 24, 43 |
| SELF REFRESH CURRENT: CKE $\leq 0.2\text{V}$ | IDD6 | 27 | 27 | 18 | mA | 9 | |
| OPERATING CURRENT: Four device bank interleaving READs (BL = 4) with auto precharge, $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; Address and control inputs change only during Active READ, or WRITE commands | IDD7 | 3,195 | 2,970 | 2,925 | mA | 20, 42 | |



Table 13: IDD Specifications and Conditions – 256M B

DDR SDRAM components only

Notes: 1–5, 8, 10, 12, 47; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| PARAMETER/CONDITION | SYMBOL | MAX | | | UNITS | NOTES | |
|--|----------------------------------|-------|-------|------------------------|-------|------------|--------|
| | | -335 | -262 | -26A/ -265/ -202 | | | |
| OPERATING CURRENT: One device bank; Active-Precharge; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles | IDD0 | 1,125 | 1,125 | 1,080 | mA | 20, 41 | |
| OPERATING CURRENT: One device bank; Active -Read Precharge; Burst = 4; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$; Address and control inputs changing once per clock cycle | IDD1 | 1,530 | 1,440 | 1,305 | mA | 20, 41 | |
| PRECHARGE POWER-DOWN STANDBY CURRENT: All device banks idle; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = (LOW) | IDD2P | 36 | 36 | 36 | mA | 21, 28, 43 | |
| IDLE STANDBY CURRENT: CS# = HIGH; All device banks idle; $t_{CK} = t_{CK}(\text{MIN})$; CKE = HIGH; Address and other control inputs changing once per clock cycle. $V_{IN} = V_{REF}$ for DQ, DQS, and DM | IDD2F | 450 | 405 | 405 | mA | 46 | |
| ACTIVE POWER-DOWN STANDBY CURRENT: One device bank active; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = LOW | IDD3P | 270 | 225 | 225 | mA | 21, 28, 43 | |
| ACTIVE STANDBY CURRENT: CS# = HIGH; CKE = HIGH; One device bank; Active-Precharge; $t_{RC} = t_{RAS}(\text{MAX})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle | IDD3N | 540 | 450 | 450 | mA | | |
| OPERATING CURRENT: Burst = 2; Reads; Continuous burst; One bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$ | IDD4R | 1,575 | 1,350 | 1,350 | mA | 20, 41 | |
| OPERATING CURRENT: Burst = 2; Writes; Continuous burst; One device bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM, and DQS inputs changing twice per clock cycle | IDD4W | 1,575 | 1,350 | 1,350 | mA | 20 | |
| AUTO REFRESH CURRENT | $t_{REFC} = t_{RFC}(\text{MIN})$ | IDD5 | 2,295 | 2,115 | 2,115 | mA | 20, 43 |
| | $t_{REFC} = 7.8125\mu\text{s}$ | IDD5A | 54 | 54 | 54 | mA | 24, 43 |
| SELF REFRESH CURRENT: CKE $\leq 0.2\text{V}$ | IDD6 | 36 | 36 | 36 | mA | 9 | |
| OPERATING CURRENT: Four device bank interleaving READs (BL = 4) with auto precharge, $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; Address and control inputs change only during Active READ, or WRITE commands | IDD7 | 3,690 | 3,150 | 3,150 | mA | 20, 42 | |



Table 14: IDD Specifications and Conditions – 512M B

DDR SDRAM components only

Notes: 1–5, 8, 10, 12, 47; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| PARAMETER/CONDITION | SYMBOL | MAX | | | UNITS | NOTES | |
|--|----------------------------------|-------|-------|------------------------|-------|------------|--------|
| | | -335 | -262 | -26A/ -265/ -202 | | | |
| OPERATING CURRENT: One device bank; Active-Precharge; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles | IDD0 | 1,170 | 1,170 | 1,035 | mA | 20, 41 | |
| OPERATING CURRENT: One device bank; Active -Read Precharge; Burst = 4; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$; Address and control inputs changing once per clock cycle | IDD1 | 1,440 | 1,440 | 1,305 | mA | 20, 41 | |
| PRECHARGE POWER-DOWN STANDBY CURRENT: All device banks idle; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = (LOW) | IDD2P | 45 | 45 | 45 | mA | 21, 28, 43 | |
| IDLE STANDBY CURRENT: CS# = HIGH; All device banks idle; $t_{CK} = t_{CK}(\text{MIN})$; CKE = HIGH; Address and other control inputs changing once per clock cycle. $V_{IN} = V_{REF}$ for DQ, DQS, and DM | IDD2F | 405 | 405 | 360 | mA | 44 | |
| ACTIVE POWER-DOWN STANDBY CURRENT: One device bank active; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = LOW | IDD3P | 315 | 315 | 270 | mA | 21, 28, 43 | |
| ACTIVE STANDBY CURRENT: CS# = HIGH; CKE = HIGH; One device bank; Active-Precharge; $t_{RC} = t_{RAS}(\text{MAX})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle | IDD3N | 450 | 450 | 405 | mA | | |
| OPERATING CURRENT: Burst = 2; Reads; Continuous burst; One bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$ | IDD4R | 1,485 | 1,485 | 1,305 | mA | 20, 41 | |
| OPERATING CURRENT: Burst = 2; Writes; Continuous burst; One device bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM, and DQS inputs changing twice per clock cycle | IDD4W | 1,575 | 1,395 | 1,215 | mA | 20 | |
| AUTO REFRESH CURRENT | $t_{REFC} = t_{RFC}(\text{MIN})$ | IDD5 | 2,610 | 2,610 | 2,520 | mA | 20, 43 |
| | $t_{REFC} = 7.8125\mu\text{s}$ | IDD5A | 90 | 90 | 90 | mA | 24, 43 |
| SELF REFRESH CURRENT: CKE $\leq 0.2\text{V}$ | IDD6 | 45 | 45 | 45 | mA | 9 | |
| OPERATING CURRENT: Four device bank interleaving READs (BL = 4) with auto precharge, $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; Address and control inputs change only during Active READ, or WRITE commands | IDD7 | 3,645 | 3,600 | 3,150 | mA | 20, 42 | |



Table 15: IDD Specifications and Conditions – 1GB

DDR SDRAM components only

Notes: 1–5, 8, 10, 12, 47; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| PARAMETER/CONDITION | SYMBOL | MAX | | | UNITS | NOTES | |
|--|----------------------------------|-------|-------|------------------------|-------|------------|--------|
| | | -335 | -262 | -26A/ -265/ -202 | | | |
| OPERATING CURRENT: One device bank; Active-Precharge; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles | IDD0 | 1,170 | 1,170 | 1,305 | mA | 20, 41 | |
| OPERATING CURRENT: One device bank; Active -Read Precharge; Burst = 4; $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$; Address and control inputs changing once per clock cycle | IDD1 | 1,440 | 1,440 | 1,620 | mA | 20, 41 | |
| PRECHARGE POWER-DOWN STANDBY CURRENT: All device banks idle; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = (LOW) | IDD2P | 45 | 45 | 90 | mA | 21, 28, 43 | |
| IDLE STANDBY CURRENT: CS# = HIGH; All device banks idle; $t_{CK} = t_{CK}(\text{MIN})$; CKE = HIGH; Address and other control inputs changing once per clock cycle. $V_{IN} = V_{REF}$ for DQ, DQS, and DM | IDD2F | 405 | 405 | 540 | mA | 44 | |
| ACTIVE POWER-DOWN STANDBY CURRENT: One device bank active; Power-down mode; $t_{CK} = t_{CK}(\text{MIN})$; CKE = LOW | IDD3P | 315 | 315 | 270 | mA | 21, 28, 43 | |
| ACTIVE STANDBY CURRENT: CS# = HIGH; CKE = HIGH; One device bank; Active-Precharge; $t_{RC} = t_{RAS}(\text{MAX})$; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM and DQS inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle | IDD3N | 405 | 405 | 405 | mA | | |
| OPERATING CURRENT: Burst = 2; Reads; Continuous burst; One bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; $I_{OUT} = 0\text{mA}$ | IDD4R | 1,485 | 1,485 | 1,800 | mA | 20, 41 | |
| OPERATING CURRENT: Burst = 2; Writes; Continuous burst; One device bank active; Address and control inputs changing once per clock cycle; $t_{CK} = t_{CK}(\text{MIN})$; DQ, DM, and DQS inputs changing twice per clock cycle | IDD4W | 1,395 | 1,395 | 1,890 | mA | 20 | |
| AUTO REFRESH CURRENT | $t_{REFC} = t_{RFC}(\text{MIN})$ | IDD5 | 2,610 | 2,610 | 2,970 | mA | 20, 43 |
| | $t_{REFC} = 7.8125\mu\text{s}$ | IDD5A | 90 | 90 | 90 | mA | 24, 43 |
| SELF REFRESH CURRENT: CKE $\leq 0.2\text{V}$ | IDD6 | 45 | 45 | 81 | mA | 9 | |
| OPERATING CURRENT: Four device bank interleaving READs (BL = 4) with auto precharge, $t_{RC} = t_{RC}(\text{MIN})$; $t_{CK} = t_{CK}(\text{MIN})$; Address and control inputs change only during Active READ, or WRITE commands | IDD7 | 3,645 | 3,600 | 4,365 | mA | 20, 42 | |

Table 16: Capacitance

Note: 11; notes appear on pages 20–23

| PARAMETER | SYMBOL | MIN | MAX | UNITS |
|---|----------|-----|-----|-------|
| Input/Output Capacitance: DQ, DQS, DM | C_{IO} | 4 | 5 | pF |
| Input Capacitance: Command and Address, S#, CKE | C_{I1} | 18 | 27 | pF |
| Input Capacitance: CK, CK# | C_{I2} | 6 | 9 | pF |



Table 17: DDR SDRAM Component Electrical Characteristics and Recommended AC Operating Conditions (-335 and -262 Speed Grades)

Notes: 1-5, 12-15, 29; notes appear on pages 20-23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| AC CHARACTERISTICS | | | -335 | | -262 | | | |
|--|---------------------|----------------|--------------------|--------|--------------------|---------|----------|--------|
| PARAMETER | | SYMBOL | MIN | MAX | MIN | MAX | UNITS | NOTES |
| Access window of DQs from CK/CK# | | t_{AC} | -0.7 | +0.7 | -0.75 | +0.75 | ns | |
| CK high-level width | | t_{CH} | 0.45 | 0.55 | 0.45 | 0.55 | t_{CK} | 26 |
| CK low-level width | | t_{CL} | 0.45 | 0.55 | 0.45 | 0.55 | t_{CK} | 26 |
| Clock cycle time | CL = 2.5 | $t_{CK} (2.5)$ | 6 | 13 | 7.5 | 13 | ns | 40, 45 |
| | CL = 2 | $t_{CK} (2)$ | 7.5 | 13 | 7.5 | 13 | ns | 40, 45 |
| DQ and DM input hold time relative to DQS | | t_{DH} | 0.45 | | 0.5 | | ns | 23, 27 |
| DQ and DM input setup time relative to DQS | | t_{DS} | 0.45 | | 0.5 | | ns | 23, 27 |
| DQ and DM input pulse width (for each input) | | t_{DIPW} | 1.75 | | 1.75 | | ns | 27 |
| Access window of DQS from CK/CK# | | t_{DQSK} | -0.60 | +0.60 | -0.75 | +0.75 | ns | |
| DQS input high pulse width | | t_{DQSH} | 0.35 | | 0.35 | | t_{CK} | |
| DQS input low pulse width | | t_{DQSL} | 0.35 | | 0.35 | | t_{CK} | |
| DQS-DQ skew, DQS to last DQ valid, per group, per access | | t_{DQSQ} | | 0.45 | | 0.5 | ns | 22, 23 |
| Write command to first DQS latching transition | | t_{DQSS} | 0.75 | 1.25 | 0.75 | 1.25 | t_{CK} | |
| DQS falling edge to CK rising - setup time | | t_{DSS} | 0.2 | | 0.2 | | t_{CK} | |
| DQS falling edge from CK rising - hold time | | t_{DSH} | 0.2 | | 0.2 | | t_{CK} | |
| Half clock period | | t_{HP} | t_{CH}, t_{CL} | | t_{CH}, t_{CL} | | ns | 30 |
| Data-out high-impedance window from CK/CK# | | t_{HZ} | | +0.70 | | +0.75 | ns | 16, 37 |
| Data-out low-impedance window from CK/CK# | | t_{LZ} | -0.70 | | -0.75 | | ns | 16, 37 |
| Address and control input hold time (fast slew rate) | | t_{IH_F} | 0.75 | | 0.90 | | ns | 12 |
| Address and control input setup time (fast slew rate) | | t_{IS_F} | 0.75 | | 0.90 | | ns | 12 |
| Address and control input hold time (slow slew rate) | | t_{IH_S} | 0.80 | | 1 | | ns | 12 |
| Address and control input setup time (slow slew rate) | | t_{IS_S} | 0.80 | | 1 | | ns | 12 |
| Address and Control input pulse width (for each input) | | t_{IPW} | 2.2 | | 2.2 | | ns | |
| LOAD MODE REGISTER command cycle time | | t_{MRD} | 12 | | 15 | | ns | |
| DQ-DQS hold, DQS to first DQ to go non-valid, per access | | t_{QH} | $t_{HP} - t_{QHS}$ | | $t_{HP} - t_{QHS}$ | | ns | 22, 23 |
| Data hold skew factor | | t_{QHS} | | 0.60 | | 0.75 | ns | |
| ACTIVE to PRECHARGE command | | t_{RAS} | 42 | 70,000 | 40 | 120,000 | ns | 31, 48 |
| ACTIVE to READ with Auto precharge command | | t_{RAP} | 15 | | 15 | | ns | |
| ACTIVE to ACTIVE/AUTO REFRESH command period | | t_{RC} | 60 | | 60 | | ns | |
| AUTO REFRESH command period | 128MB, 256MB, 512MB | t_{RFC} | 72 | | 75 | | ns | 43 |
| | 1GB | | 120 | | 120 | | | |
| ACTIVE to READ or WRITE delay | | t_{RCD} | 15 | | 15 | | ns | |
| PRECHARGE command period | | t_{RP} | 15 | | 15 | | ns | |
| DQS read preamble | | t_{RPRE} | 0.9 | 1.1 | 0.9 | 1.1 | t_{CK} | 38 |
| DQS read postamble | | t_{RPST} | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} | 38 |
| ACTIVE bank a to ACTIVE bank b command | | t_{RRD} | 12 | | 15 | | ns | |
| DQS write preamble | | t_{WPRE} | 0.25 | | 0.25 | | t_{CK} | |
| DQS write preamble setup time | | t_{WPRES} | 0 | | 0 | | ns | 17, 19 |
| DQS write postamble | | t_{WPST} | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} | 17 |
| Write recovery time | | t_{WR} | 15 | | 15 | | ns | |



Table 17: DDR SDRAM Component Electrical Characteristics and Recommended AC Operating Conditions (-335 and -262 Speed Grades) (Continued)

Notes: 1–5, 12-15, 29; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| AC CHARACTERISTICS | | | -335 | | -262 | | | |
|---------------------------------------|------------|---------------------|------|---------------------|------|---------------|-------|--|
| PARAMETER | SYMBOL | MIN | MAX | MIN | MAX | UNITS | NOTES | |
| Internal WRITE to READ command delay | t_{WTR} | 1 | | 1 | | t_{CK} | | |
| Data valid output window | na | $t_{QH} - t_{DQSQ}$ | | $t_{QH} - t_{DQSQ}$ | | ns | 22 | |
| REFRESH to REFRESH command interval | t_{REFC} | | 70.3 | | 70.3 | μs | 21 | |
| Average periodic refresh interval | t_{REFI} | | 7.8 | | 7.8 | μs | 21 | |
| Terminating voltage delay to VDD | t_{VTD} | 0 | | 0 | | ns | | |
| Exit SELF REFRESH to non-READ command | t_{XSNR} | 75 | | 75 | | ns | | |
| Exit SELF REFRESH to READ command | t_{XSRD} | 200 | | 200 | | t_{CK} | | |

Table 18: DDR SDRAM Component Electrical Characteristics and Recommended AC Operating Conditions (-26A, -265, and -202 Speed Grades)

Notes: 1–5, 12-15, 29; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| AC CHARACTERISTICS | | | -26A/-265 | | -202 | | | |
|--|-------------|------------------|-----------|------------------|------|----------|--------|--------|
| PARAMETER | SYMBOL | MIN | MAX | MIN | MAX | UNITS | NOTES | |
| Access window of DQs from CK/ CK# | t_{AC} | -0.75 | 0.75 | -0.8 | 0.8 | ns | | |
| CK high-level width | t_{CH} | 0.45 | 0.55 | 0.45 | 0.55 | t_{CK} | 26 | |
| CK low-level width | t_{CL} | 0.45 | 0.55 | 0.45 | 0.55 | t_{CK} | 26 | |
| Clock cycle time | CL = 2.5 | $t_{CK} (2.5)$ | 7.5 | 13 | 8 | 13 | ns | 40, 45 |
| | CL = 2 | $t_{CK} (2)$ | 7.5/10 | 13 | 10 | 13 | ns | 40, 45 |
| DQ and DM input hold time relative to DQS | t_{DH} | 0.5 | | 0.6 | | ns | 23, 27 | |
| DQ and DM input setup time relative to DQS | t_{DS} | 0.5 | | 0.6 | | ns | 23, 27 | |
| DQ and DM input pulse width (for each input) | t_{DIPW} | 1.75 | | 2 | | ns | 27 | |
| Access window of DQS from CK/CK# | t_{DQSCK} | -0.75 | +0.75 | -0.8 | +0.8 | ns | | |
| DQS input high pulse width | t_{DQSH} | 0.35 | | 0.35 | | t_{CK} | | |
| DQS input low pulse width | t_{DQSL} | 0.35 | | 0.35 | | t_{CK} | | |
| DQS-DQ skew, DQS to last DQ valid, per group, per access | t_{DQSQ} | | 0.5 | | 0.6 | ns | 22, 23 | |
| Write command to first DQS latching transition | t_{DQSS} | 0.75 | 1.25 | 0.75 | 1.25 | t_{CK} | | |
| DQS falling edge to CK rising - setup time | t_{DSS} | 0.2 | | 0.2 | | t_{CK} | | |
| DQS falling edge from CK rising - hold time | t_{DSH} | 0.2 | | 0.2 | | t_{CK} | | |
| Half clock period | t_{HP} | t_{CH}, t_{CL} | | t_{CH}, t_{CL} | | ns | 30 | |
| Data-out high-impedance window from CK/CK# | t_{HZ} | | +0.75 | | +0.8 | ns | 16, 37 | |
| Data-out low-impedance window from CK/CK# | t_{LZ} | -0.75 | | -0.8 | | ns | 16, 37 | |
| Address and control input hold time (fast slew rate) | t_{IH_F} | 0.90 | | 1.1 | | ns | 12 | |
| Address and control input setup time (fast slew rate) | t_{IS_F} | 0.90 | | 1.1 | | ns | 12 | |
| Address and control input hold time (slow slew rate) | t_{IH_S} | 1 | | 1.1 | | ns | 12 | |
| Address and control input setup time (slow slew rate) | t_{IS_S} | 1 | | 1.1 | | ns | 12 | |
| Address and Control input pulse width (for each input) | t_{IPW} | 2.2 | | 2.2 | | ns | | |
| LOAD MODE REGISTER command cycle time | t_{MRD} | 15 | | 16 | | ns | | |




Table 18: DDR SDRAM Component Electrical Characteristics and Recommended AC Operating Conditions (-26A, -265, and -202 Speed Grades) (Continued)

Notes: 1–5, 12-15, 29; notes appear on pages 20–23; $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$; $V_{DD} = V_{DDQ} = +2.5\text{V} \pm 0.2\text{V}$

| AC CHARACTERISTICS | | | -26A/-265 | | -202 | | | |
|--|----------------------------|-------------|---------------------|---------|---------------------|---------|---------------|--------|
| PARAMETER | | SYMBOL | MIN | MAX | MIN | MAX | UNITS | NOTES |
| DQ-DQS hold, DQS to first DQ to go non-valid, per access | | t_{QH} | $t_{HP} - t_{QHS}$ | | $t_{HP} - t_{QHS}$ | | ns | 22, 23 |
| Data hold skew factor | | t_{QHS} | | 0.75 | | 1 | ns | |
| ACTIVE to PRECHARGE command | | t_{RAS} | 40 | 120,000 | 40 | 120,000 | ns | 31, 48 |
| ACTIVE to READ with Auto precharge command | | t_{RAP} | 20 | | 20 | | ns | |
| ACTIVE to ACTIVE/AUTO REFRESH command period | | t_{RC} | 65 | | 70 | | ns | |
| AUTO REFRESH command period | 128MB, 256MB, 512MB 1GB | t_{RFC} | 72 120 | | 75 120 | | ns | 43 |
| ACTIVE to READ or WRITE delay | | t_{RCD} | 20 | | 20 | | ns | |
| PRECHARGE command period | | t_{RP} | 20 | | 20 | | ns | |
| DQS read preamble | | t_{RPRE} | 0.9 | 1.1 | 0.9 | 1.1 | t_{CK} | 38 |
| DQS read postamble | | t_{RPST} | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} | 38 |
| ACTIVE bank a to ACTIVE bank b command | | t_{RRD} | 15 | | 15 | | ns | |
| DQS write preamble | | t_{WPRE} | 0.25 | | 0.25 | | t_{CK} | |
| DQS write preamble setup time | | t_{WPRES} | 0 | | 0 | | ns | 17, 19 |
| DQS write postamble | | t_{WPST} | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} | 17 |
| Write recovery time | | t_{WR} | 15 | | 15 | | ns | |
| Internal WRITE to READ command delay | | t_{WTR} | 1 | | 1 | | t_{CK} | |
| Data valid output window | | na | $t_{QH} - t_{DQSQ}$ | | $t_{QH} - t_{DQSQ}$ | | ns | 22 |
| REFRESH to REFRESH command interval | | t_{REFC} | | 70.3 | | 70.3 | μs | 21 |
| Average periodic refresh interval | | t_{REFI} | | 7.8 | | 7.8 | μs | 21 |
| Terminating voltage delay to VDD | | t_{VTD} | 0 | | 0 | | ns | |
| Exit SELF REFRESH to non-READ command | | t_{XSNR} | 75 | | 80 | | ns | |
| Exit SELF REFRESH to READ command | | t_{XSRD} | 200 | | 200 | | t_{CK} | |

Notes

1. All voltages referenced to VSS.
2. Tests for AC timing, I_{DD} , and electrical AC and DC characteristics may be conducted at nominal reference/supply voltage levels, but the related specifications and device operation are guaranteed for the full voltage range specified.
3. Outputs measured with equivalent load:




4. AC timing and I_{DD} tests may use a V_{IL} -to- V_{IH} swing of up to 1.5V in the test environment, but input timing is still referenced to V_{REF} (or to the crossing point for CK/CK#), and parameter specifications are guaranteed for the specified AC input levels under normal use conditions. The minimum slew rate for the input signals used to test the device is 1V/ns in the range between $V_{IL(AC)}$ and $V_{IH(AC)}$.
5. The AC and DC input level specifications are as defined in the SSTL_2 Standard (i.e., the receiver will effectively switch as a result of the signal crossing the AC input level, and will remain in that state as long as the signal does not ring back above [below] the DC input LOW [HIGH] level).
6. V_{REF} is expected to equal $V_{DDQ}/2$ of the transmitting device and to track variations in the DC level of the same. Peak-to-peak noise (non-common mode) on V_{REF} may not exceed ± 2 percent of the DC value. Thus, from $V_{DDQ}/2$, V_{REF} is allowed $\pm 25mV$ for DC error and an additional $\pm 25mV$ for AC noise. This measurement is to be taken at the nearest V_{REF} bypass capacitor.
7. V_{TT} is not applied directly to the device. V_{TT} is a system supply for signal termination resistors, is expected to be set equal to V_{REF} and must track variations in the DC level of V_{REF} .
8. I_{DD} is dependent on output loading and cycle rates. Specified values are obtained with minimum cycle time at $CL = 2$ for -26A and -202, $CL = 2.5$ for -265 and -335 with the outputs open.
9. Enables on-chip refresh and address counters.
10. I_{DD} specifications are tested after the device is properly initialized, and is averaged at the defined cycle rate.
11. This parameter is sampled. $V_{DD} = +2.5V \pm 0.2V$, $V_{DDQ} = +2.5V \pm 0.2V$, $V_{REF} = V_{SS}$, $f = 100 MHz$, $T_A = 25^\circ C$, $V_{OUT(DC)} = V_{DDQ}/2$, $V_{OUT(peak\ to\ peak)} = 0.2V$. DM input is grouped with I/O pins, reflecting the fact that they are matched in loading.
12. For slew rates $< 1 V/ns$ and $\geq 0.5 V/ns$. If the slew rate is $< 0.5V/ns$, timing must be derated: t_{IS} has an additional 50ps per each 100 mV/ns reduction in slew rate from 500 mV/ns, while t_{IH} is unaffected. If the slew rate exceeds 4.5 V/ns, functionality is uncertain. For -335, slew rates must be $\geq 0.5 V/ns$.
13. The CK/CK# input reference level (for timing referenced to CK/CK#) is the point at which CK and CK# cross; the input reference level for signals other than CK/CK# is V_{REF} .
14. Inputs are not recognized as valid until V_{REF} stabilizes. Exception: during the period before V_{REF} stabilizes, $CKE \leq 0.3 \times V_{DDQ}$ is recognized as LOW.
15. The output timing reference level, as measured at the timing reference point indicated in Note 3, is V_{TT} .
16. t_{HZ} and t_{LZ} transitions occur in the same access time windows as data valid transitions. These parameters are not referenced to a specific voltage level, but specify when the device output is no longer driving (HZ) or begins driving (LZ).
17. The intent of the Don't Care state after completion of the postamble is the DQS-driven signal should either be high, low, or high-Z and that any signal transition within the input switching region must follow valid input requirements. That is, if DQS transitions high [above $V_{IHDC}(MIN)$] then it must not transition low (below V_{IHDC}) prior to $t_{DQSH}(MIN)$.
18. This is not a device limit. The device will operate with a negative value, but system performance could be degraded due to bus turnaround.
19. It is recommended that DQS be valid (HIGH or LOW) on or before the WRITE command. The case shown (DQS going from High-Z to logic LOW) applies when no WRITES were previously in progress on the bus. If a previous WRITE was in progress, DQS could be HIGH during this time, depending on t_{DQSS} .
20. MIN (t_{RC} or t_{RFC}) for I_{DD} measurements is the smallest multiple of t_{CK} that meets the minimum absolute value for the respective parameter. $t_{RAS}(MAX)$ for I_{DD} measurements is the largest multiple of t_{CK} that meets the maximum absolute value for t_{RAS} .
21. The refresh period 64ms. This equates to an average refresh rate of 15.625 μs (128MB) or 7.8125 μs (256MB, 512MB, 1GB). However, an AUTO

REFRESH command must be asserted at least once every 140.6µs (128MB) or 70.3µs (256MB, 512MB, 1GB); burst refreshing or posting by the DRAM controller greater than eight refresh cycles is not allowed.

- 22. The data valid window is derived by achieving other specifications: t_{HP} ($t_{CK}/2$), t_{DQSQ} , and t_{QH} ($t_{QH} = t_{HP} - t_{QHS}$). The data valid window derates directly proportional with the clock duty cycle and a practical data valid window can be derived. The clock is allowed a maximum duty cycle variation of 45/55, beyond which functionality is uncertain. Figure 7, Derating Data Valid Window, shows derating curves are provided below for duty cycles ranging between 50/50 and 45/55.
- 23. Each byte lane has a corresponding DQS.
- 24. This limit is actually a nominal value and does not result in a fail value. CKE is HIGH during REFRESH command period (t_{RFC} [MIN]) else CKE is LOW (i.e., during standby).

- 25. To maintain a valid level, the transitioning edge of the input must:
 - a. Sustain a constant slew rate from the current AC level through to the target AC level, $V_{IL}(AC)$ or $V_{IH}(AC)$.
 - b. Reach at least the target AC level.
 - c. After the AC target level is reached, continue to maintain at least the target DC level, $V_{IL}(DC)$ or $V_{IH}(DC)$.
- 26. JEDEC specifies CK and CK# input slew rate must be $\geq 1V/ns$ (2V/ns differentially).
- 27. DQ and DM input slew rates must not deviate from DQS by more than 10 percent. If the DQ/DM/DQS slew rate is less than 0.5 V/ns, timing must be derated: 50ps must be added to t_{DS} and t_{DH} for each 100 mV/ns reduction in slew rate. If slew rate exceeds 4 V/ns, functionality is uncertain. For -335, slew rates must be ≥ 0.5 V/ns.
- 28. VDD must not vary more than 4 percent if CKE is not active while any bank is active.

Figure 7: Derating Data Valid Window
($t_{QH} - t_{DQSQ}$)

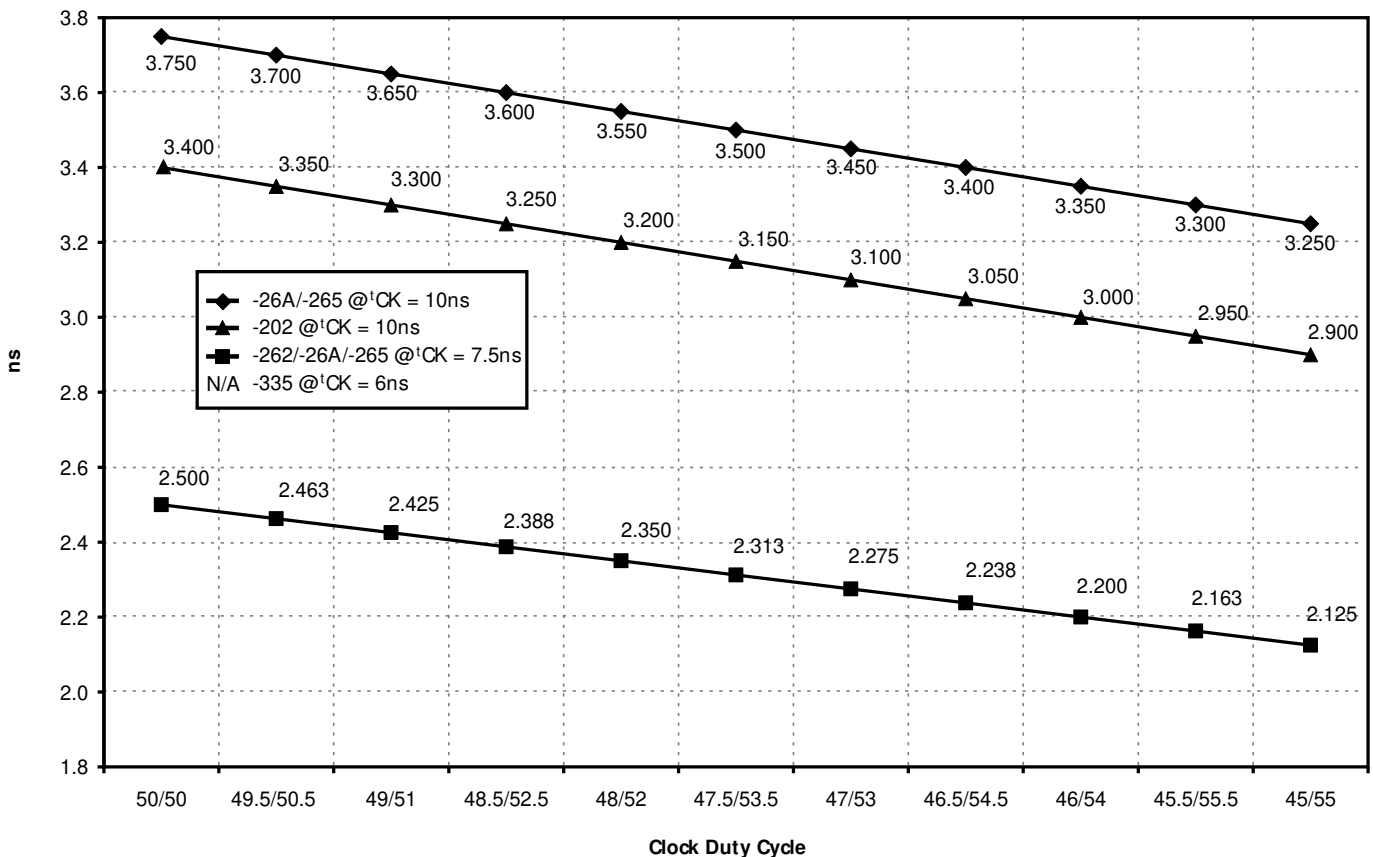

29. The clock is allowed up to $\pm 150\text{ps}$ of jitter. Each timing parameter is allowed to vary by the same amount.
30. t_{HP} min is the lesser of t_{CL} minimum and t_{CH} minimum actually applied to the device CK and CK/ inputs, collectively during bank active.
31. READs and WRITEs with auto precharge are not allowed to be issued until $t_{RAS}(\text{MIN})$ can be satisfied prior to the internal precharge command being issued.
32. Any positive glitch in the nominal voltage must be less than 1/3 of the clock and not more than +400mV or 2.9V maximum, whichever is less. Any negative glitch must be less than 1/3 of the clock cycle and not exceed either -300mV or 2.2V minimum, whichever is more positive.
33. Normal Output Drive Curves:
 - a. The full variation in driver pull-down current from minimum to maximum process, temperature and voltage will lie within the outer bounding lines of the V-I curve of Figure 8, Pull-Down Characteristics.
 - b. The variation in driver pull-down current within nominal limits of voltage and temperature is expected, but not guaranteed, to lie within the inner bounding lines of the V-I curve of Figure 8, Pull-Down Characteristics.
 - c. The full variation in driver pull-up current from minimum to maximum process, temperature and voltage will lie within the outer bounding lines of the V-I curve of Figure 9, Pull-Up Characteristics.
 - d. The variation in driver pull-up current within nominal limits of voltage and temperature is expected, but not guaranteed, to lie within the inner bounding lines of the V-I curve of Figure 9, Pull-Up Characteristics.
 - e. The full variation in the ratio of the maximum to minimum pull-up and pull-down current should be between 0.71 and 1.4, for device drain-to-source voltages from 0.1V to 1.0V, and at the same voltage and temperature.
 - f. The full variation in the ratio of the nominal pull-up to pull-down current should be unity ± 10 percent, for device drain-to-source voltages from 0.1V to 1.0V.
34. The voltage levels used are derived from a minimum VDD level and the referenced test load. In practice, the voltage levels obtained from a properly terminated bus will provide significantly different voltage values.
35. V_{IH} overshoot: $V_{IH}(\text{MAX}) = V_{DDQ} + 1.5\text{V}$ for a pulse width $\leq 3\text{ns}$ and the pulse width can not be greater than 1/3 of the cycle rate. V_{IL} undershoot: $V_{IL}(\text{MIN}) = -1.5\text{V}$ for a pulse width $\leq 3\text{ns}$ and the pulse width can not be greater than 1/3 of the cycle rate.
36. VDD and VDDQ must track each other.
37. $t_{HZ}(\text{MAX})$ will prevail over $t_{DQSCK}(\text{MAX}) + t_{RPST}(\text{MAX})$ condition. $t_{LZ}(\text{MIN})$ will prevail over $t_{DQSCK}(\text{MIN}) + t_{RPRE}(\text{MAX})$ condition.
38. t_{RPST} end point and t_{RPRE} begin point are not referenced to a specific voltage level but specify when the device output is no longer driving (t_{RPST}), or begins driving (t_{RPRE}).

Figure 8: Pull-Down Characteristics


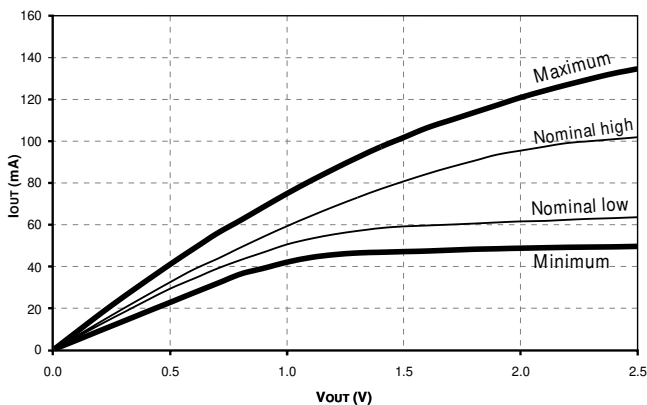


Figure 9: Pull-Up Characteristics

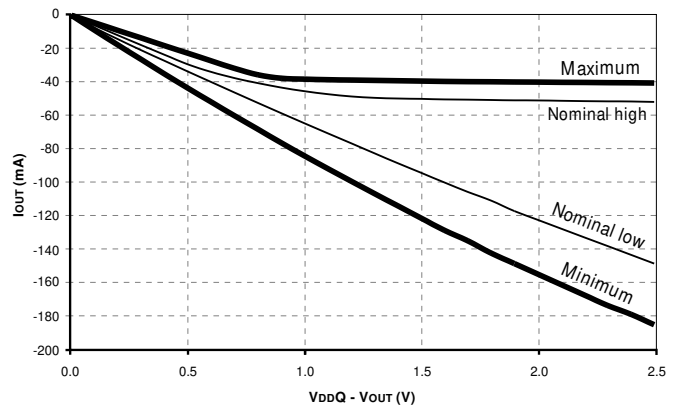

39. During initialization, VDDQ, VTT, and VREF must be equal to or less than VDD + 0.3V. Alternatively, VTT may be 1.35V maximum during power up, even if VDD/ VDDQ are 0V, provided a minimum of 42Ω of series resistance is used between the VTT supply and the input pin.
40. The current Micron part operates below the slowest JEDEC operating frequency of 83 MHz. As such, future die may not reflect this option.
41. Random addressing changing and 50 percent of data changing at every transfer.
42. Random addressing changing and 100 percent of data changing at every transfer.
43. CKE must be active (high) during the entire time a refresh command is executed. That is, from the time the AUTO REFRESH command is registered, CKE must be active at each rising clock edge, until tREF later.
44. IDD2N specifies the DQ, DQS, and DM to be driven to a valid high or low logic level. IDD2Q is similar to IDD2F except IDD2Q specifies the address and control inputs to remain stable. Although IDD2F, IDD2N, and IDD2Q are similar, IDD2F is “worst case.”
45. Whenever the operating frequency is altered, not including jitter, the DLL is required to be reset. This is followed by 200 clock cycles (before READ commands).
46. Leakage number reflects the worst case leakage possible through the module pin, not what each memory device contributes.
47. When an input signal is HIGH or LOW, it is defined as a steady state logic HIGH or LOW.
48. The -335 speed grade will operate with tRAS (MIN) = 40ns and tRAS (MAX) = 120,000ns at any slower frequency.

Initialization

To ensure device operation the DRAM must be initialized as described below:

1. Simultaneously apply power to VDD and VDDQ.
2. Apply VREF and then VTT power.
3. Assert and hold CKE at a LVCMOS logic low.
4. Provide stable CLOCK signals.
5. Wait at least 200 μ s.
6. Bring CKE high and provide at least one NOP or DESELECT command. At this point the CKE input changes from a LVCMOS input to a SSTL2 input only and will remain a SSTL_2 input unless a power cycle occurs.
7. Perform a PRECHARGE ALL command.
8. Wait at least ^tRP time, during this time NOPs or DESELECT commands must be given.
9. Using the LMR command program the Extended Mode Register (E0 = 0 to enable the DLL and E1 = 0 for normal drive or E1 = 1 for reduced drive, E2 through En must be set to 0; where n = most significant bit).
10. Wait at least ^tMRD time, only NOPs or DESELECT commands are allowed.
11. Using the LMR command program the Mode Register to set operating parameters and to reset the DLL. Note at least 200 clock cycles are required between a DLL reset and any READ command.
12. Wait at least ^tMRD time, only NOPs or DESELECT commands are allowed.
13. Issue a PRECHARGE ALL command.
14. Wait at least ^tRP time, only NOPs or DESELECT commands are allowed.
15. Issue an AUTO REFRESH command (Note this may be moved prior to step 13).
16. Wait at least ^tRFC time, only NOPs or DESELECT commands are allowed.
17. Issue an AUTO REFRESH command (Note this may be moved prior to step 13).
18. Wait at least ^tRFC time, only NOPs or DESELECT commands are allowed.
19. Although not required by the Micron device, JEDEC requires a LMR command to clear the DLL bit (set M8 = 0). If a LMR command is issued the same operating parameters should be utilized as in step 11.
20. Wait at least ^tMRD time, only NOPs or DESELECT commands are allowed.
21. At this point the DRAM is ready for any valid command. Note 200 clock cycles are required between step 11 (DLL Reset) and any READ command.

Figure 10: Initialization Flow Diagram


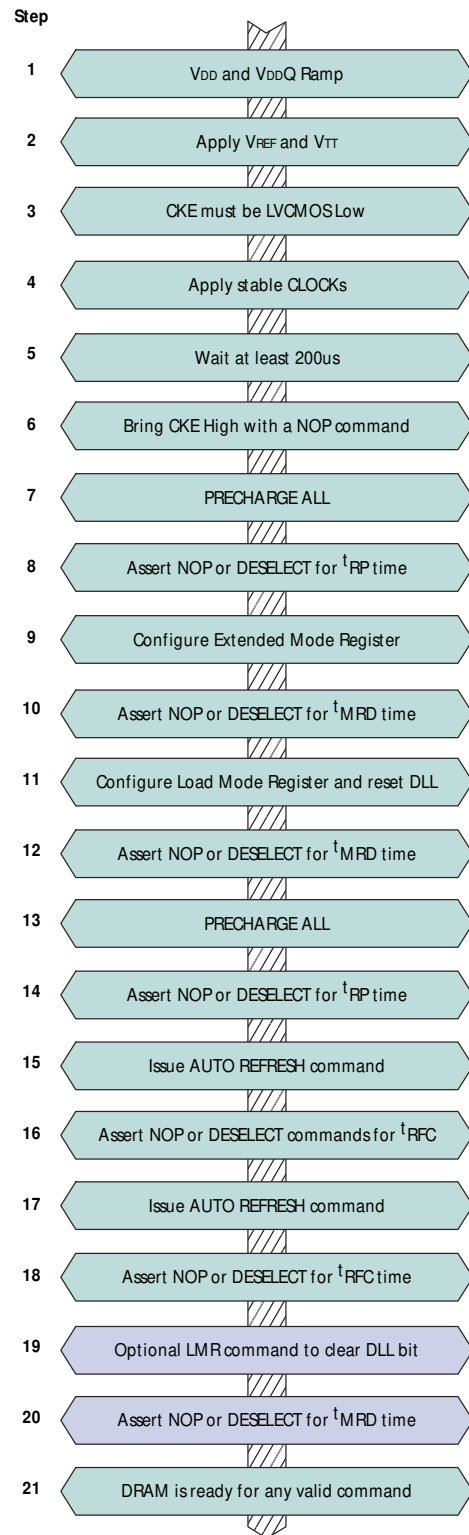


Figure 11: Component Case Temperature vs. Air Flow

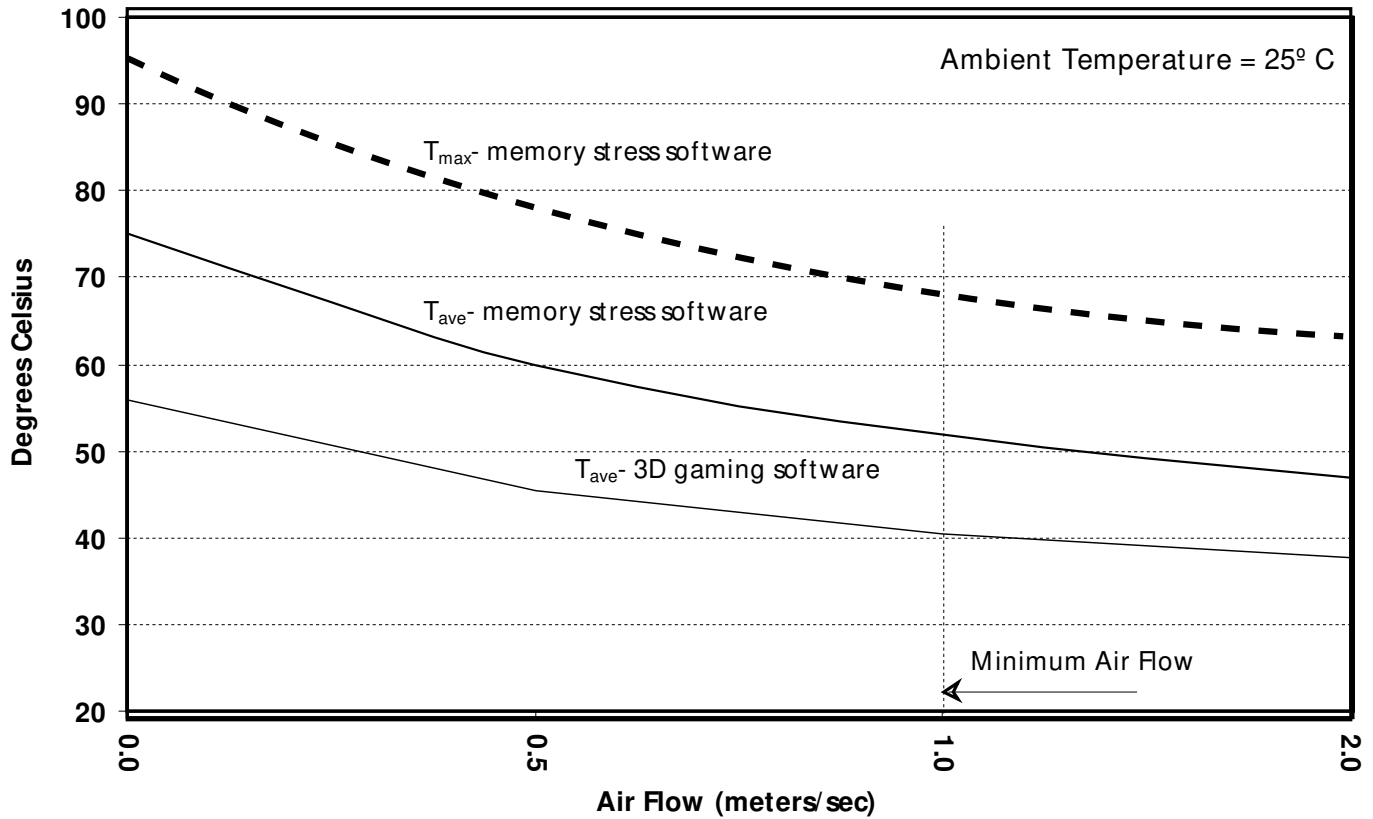

NOTE:

1. Micron Technology, Inc. recommends a minimum air flow of 1 meter/second (~197 LFM) across all modules.
2. The component case temperature measurements shown above were obtained experimentally. The typical system to be used for experimental purposes is a dual-processor 600 MHz work station, fully loaded, with four comparable registered memory modules. Case temperatures charted represent worst-case component locations on modules installed in the internal slots of the system.
3. Temperature versus air speed data is obtained by performing experiments with the system motherboard removed from its case and mounted in a Eiffel-type low air speed wind tunnel. Peripheral devices installed on the system motherboard for testing are the processor(s) and video card, all other peripheral devices are mounted outside of the wind tunnel test chamber.
4. The memory diagnostic software used for determining worst-case component temperatures is a memory diagnostic software application developed for internal use by Micron Technology, Inc.