



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MTH100



- Designed for Extended Hold-Up Applications
- 80% Less Hold Up Capacitance Required
- High Energy Density
- High Efficiency
- User Programmable
- Reduces System Size and Weight
- 10 A Output Current
- Wide Input Range
- 3 Year Warranty

The MTH100 is a COTS hold-up module developed specifically for the defense and avionics market. The product is designed to maintain electronic system operation during extended input bus drop-out scenarios. It reduces the capacitance needed by up to 80%, charging the hold-up capacitor to a high voltage (35 V or 45 V) and uses the additional stored energy to supply the system.

## Input Characteristics

| Characteristic                      | Minimum | Typical | Maximum | Units | Notes & Conditions                                 |
|-------------------------------------|---------|---------|---------|-------|--|
| Input Voltage                       | 10.00   | 28.00   | 40.00   | VDC   |  |
| Transient Input Range               |         |         | 50.00   | V     | For 1 s  |
| Input Current                       |         |         | 10.05   | A     | At full load (10 A)                                |
| Additional Input Charging Current   |         | 1.50    | 2.50    | A     | At 10 VDC input, during hold up capacitor charging |
| No Load Current                     |         |         | 50.00   | mA    |  |
| Power Fail Voltage Threshold (DCFP) | 10.00   |         |         | V     | V <sub>fail</sub> set by resistor R1, see page 5   |
| Reverse Voltage Protection          |         |         |         |       | Required and to be provided, see page 5            |
| Fuse Protection                     |         |         |         |       | External fuse required for overload protection     |

## Output Characteristics

| Characteristic       | Minimum                | Typical | Maximum | Units | Notes & Conditions |
|----------------------|------------------------|---------|---------|-------|--------------------|
| Output Current       |                        |         | 10      | A     |                    |
| Output Power         |                        |         | 100     | W     |                    |
| Voltage Drop         |                        |         | 130     | mV    | At 10 A            |
| Output Voltage       | V <sub>in</sub> - 0.13 |         |         | V     | At 10 A load       |
| Changeover Capacitor | 150                    |         | 470     | µF    | ±20%, see page 5   |
| Hold Up Time         |                        |         |         |       | See page 5         |

## Charger Output

| Characteristic                             | Minimum  | Typical | Maximum      | Units   | Notes & Conditions   |
|--|--|---------|--------------|---------|--|
| Hold Up Capacitor (C1)                     | 1000   |         |              | µF      | See page 5   |
| Hold Up Capacitor Charge Time              |  |         |              | s       | See page 5   |
| Set Accuracy                               |  | 2       |              | %       |  |
| Charger Output Voltage (V <sub>Cap</sub> ) | 35<br>45   |         | 36.4<br>46.8 | V       | CVP not connected<br>CVP connected   |
| Ripple and Noise                           |  |         | 1            | % pk-pk | Of charger output @ 20 MHz   |
| Overvoltage Protection                     | 48   | 49      | 50           | V       |  |
| Overload Protection                        |  |         |              |         | No damage for overload or short circuit. If V <sub>out</sub> < 30 V after 10 s the charger will shut down and restart after a further 10 s |
| Overtemperature Protection                 | 102  |         | 107          | °C      | With 5 °C typical hysteresis   |
| Charge/Discharge Detect Signal (CDD)       | Open collector output, 100 V, 100 mA max, Low at 90% V <sub>cap</sub> , High at 30% V <sub>cap</sub> , Tolerance ±3%                               |         |              |         |  |
| Power Fail Detect (DCFD)                   | Open collector output, 100 V, 100 mA max, Low at V <sub>in</sub> > V <sub>fail</sub> , High at V <sub>in</sub> < V <sub>fail</sub> , Tolerance ±3% |         |              |         |  |

## General Specification

| Characteristic      | Minimum      | Typical | Maximum | Units | Notes & Conditions              |
|---------------------|--------------|---------|---------|-------|---------------------------------|
| Efficiency          | 98           |         |         | %     | At 28 VDC input and max power   |
| Series Resistance   |              |         | 0.013   |       |                                 |
| Isolation           | 1000<br>1000 |         |         | VDC   | Input to Case<br>Output to Case |
| Switching Frequency |              | 400     |         | KHZ   |                                 |

## Environmental

| Characteristic        | Minimum  | Typical | Maximum | Units | Notes & Conditions              |
|-----------------------|--|---------|---------|-------|---------------------------------|
| Operating Temperature | -40  |         | +100    | °C    | Case                            |
| Extended Temperature  | -55  |         |         | °C    | Start up with -LT screen option |
| Storage Temperature   | -50  |         | 125     | °C    | Excluding Packaging             |
| Operating Altitude    | 70,000 feet (21336 m)                                      |         |         |       |                                 |
| Shock                 | 100g MIL-STD 810D Method 516.3                             |         |         |       |                                 |
| Bump                  | 2000 bumps in each axes at 40g, MIL-STD-810D, Method 516.3 |         |         |       |                                 |
| Vibration             | 10 to 2000 Hz MIL-STD 810D, Method 514.3                   |         |         |       |                                 |
| Salt Atmosphere       | 48 hours duration MIL-STD 810E, Method 509.1               |         |         |       |                                 |

## EMC

| Standard                 | Category   |
|--------------------------|--|
| Conducted Emissions      | EN55022 Conducted Level B, MIL-STD-461E/F CE101, CE102 |
| Immunity                 | MIL-STD 1275 A-D                                       |
| Conducted Susceptibility | MIL-STD-461E CS101, CS114, CS115, CS116                |

EMC standards are met when use in conjunction with the MTF or DSF filter modules or other external components.

## Models & Ratings

| Output Voltage                      | Input Voltage | Efficiency | Model Number |
|-------------------------------------|---------------|------------|--------------|
| Vin - (Iout x 0.013) <sup>(1)</sup> | 10 - 40 VDC   | 98 %       | MTH100       |
| Vcap - 0.8 V <sup>(2)</sup>         |               |            |              |

1. During normal operation.
2. During hold-up time.

3. For -55 °C extended operating range add suffix '-LT' to the part number

## MTBF Calculations

| Temperature / Environment | Ground Mobile - GM | Airbourne Inhabited Cargo - AIC | Airbourne Inhabited Fighter - AIF |
|---------------------------|--------------------|---------------------------------|-----------------------------------|
| 20 °C                     | 1560851 Hrs        | 1179429 Hrs                     | 553496 Hrs                        |
| 40 °C                     | 1048943 Hrs        | 795673 Hrs                      | 373869 Hrs                        |
| 60 °C                     | 730034 Hrs         | 557914 Hrs                      | 263091 Hrs                        |
| 80 °C                     | 520067 Hrs         | 402490 Hrs                      | 191184 Hrs                        |
| 100 °C                    | 374123 Hrs         | 295449 Hrs                      | 142217 Hrs                        |

## Block Diagram

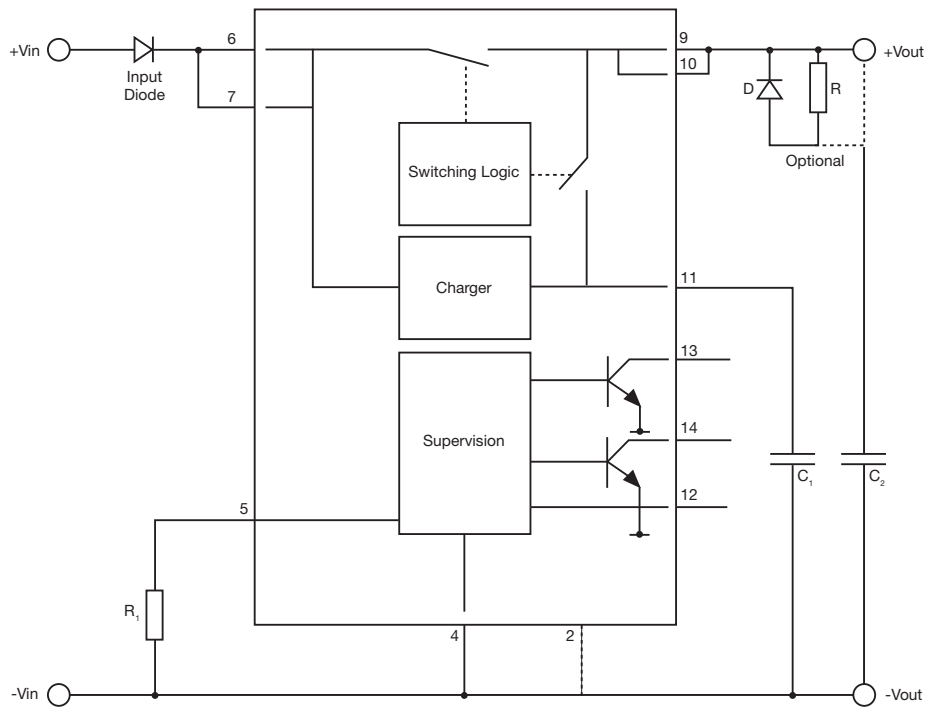


Figure 1 - Block diagram

The MTH100 module includes three main circuits:

- Switching Logic** This circuit monitors the input bus voltage and compares it to the power fail threshold voltage  $V_{fail}$  (set externally). When the input exceeds the fail threshold the charger and hold up switch are enabled.
- Charger** The charger is used to charge the hold up capacitor to 35 V or 45 V depending on the setting of the CVP pin 12.
- Supervision Circuit** The supervision circuit monitors the charging status of the hold up capacitor. It also generates two isolated flags: input DC fail detect (DCFD) and the charge/discharge detect (CDD). These signals are used at the system level for management of power interruption.

## EMC Conducted Emissions

Test conditions:  $V_{in} = 28\text{ V}$ , 22 output load,  $V_{cap} = 45\text{ V}$ , 1 k load on the charger; using MTF50 with 1  $\mu\text{F}$  on input.

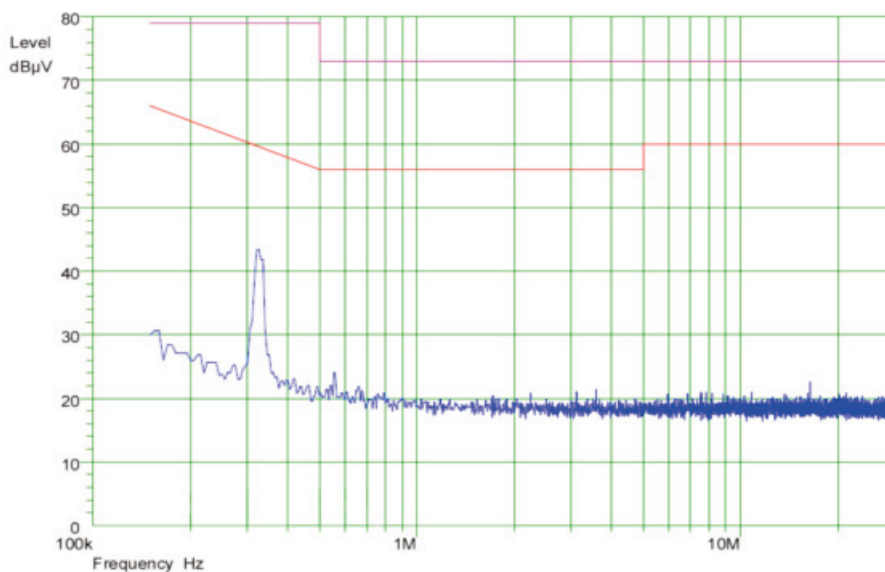


Figure 2 - Conducted emissions

## Application Notes

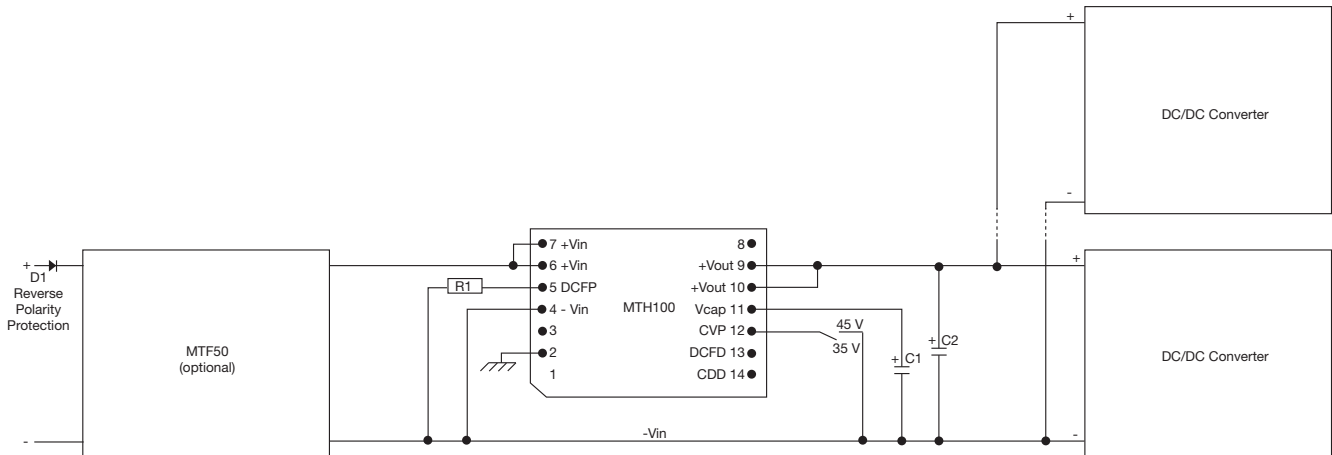


Figure 3 - Connection diagram

$$R1 = \left( \frac{40.67}{V_{fail} - 9.785} - 3.92 \right) \times 10^3$$

$$C1 = \left( \frac{2 \times P_{out} \times t_{hold-up}}{V_{cap}^2 - V_{min}^2} \right) \times 1.1$$

$$C2 = \frac{P_{out} \times 400 \times 10^{-6}}{V_{fail}^2 - V_{min}^2}$$

R1: Resistor setting the input voltage fail threshold (DCFP)  
 V<sub>fail</sub>: Required fail voltage

C1: Hold up capacitor (minimum value including tolerance)  
 t<sub>hold up</sub>: Hold up time required

V<sub>cap</sub>: C1 charge voltage  
 V<sub>min</sub>: Minimum DC/DC input voltage (≥10 VDC)

P<sub>out</sub>: Output power from MTH100  
 C2: Changeover capacitor

| Maximum charge time at Vin = 10 V |          |          |     |
|-----------------------------------|----------|----------|-----|
| C1 (μF)                           | Vcap (V) | Time (s) |     |
|                                   |          | Typical  | Max |
| 10,000                            | 45       | 1.2      | 1.5 |
| 10,000                            | 35       | 0.8      | 1.0 |
| 30,000                            | 45       | 3.4      | 4.0 |
| 30,000                            | 35       | 2.0      | 2.4 |
| 50,000                            | 45       | 5.5      | 6.0 |
| 50,000                            | 35       | 3.2      | 3.8 |


## Notes

- C1 has a minimum value of 1000 μF, this enables an open circuit or missing component to be detected. There is no maximum limit other than extended charge time.
- MTH100 charges the Hold-up capacitor C1 to 45V max when charge voltage programming (CVP) pin is connected or 35V when not connected. Charging starts when the input voltage reaches the power fail voltage threshold.
- Input DC fail programming (DCFP) sets the power fail voltage threshold using resistor R1. See formula for the value required.
- Input DC fail detect (DCFD) is an open collector circuit which changes state when the input voltage fails below the set threshold.
- Charge/discharge detect (CDD) is an open collector circuit which goes low when C1 is charged to 90% of Vcap or high when C1 discharges down to 30% of Vcap.
- DCFD & CDD may be pulled up to +Vout with a suitable pull up resistor to create a signal referenced to the input or may be used to drive an opto-coupler diode with a suitable current limiting resistor where the signal is required to be referenced to the output.

## Charge Time

Example:


- C1 = 30 mF
- C2 = 150  $\mu$ s
- Vcap = 45 V
- CVP = Low
- DCFP = 10 V
- tcharge = 1.7 s

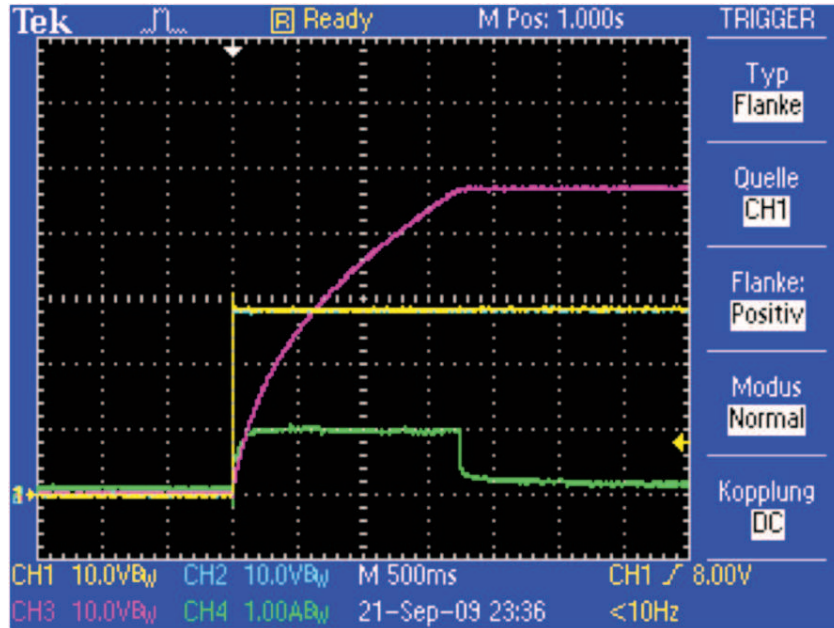

## Hold Up Time

Example:

- C1 = 50 mF
- C2 = 150  $\mu$ F
- Constant Power Load = 10.5 A
- Vcap = 45 V
- CVP = Low
- DCFP = 15 V
- t<sub>hold up</sub> = 500 ms

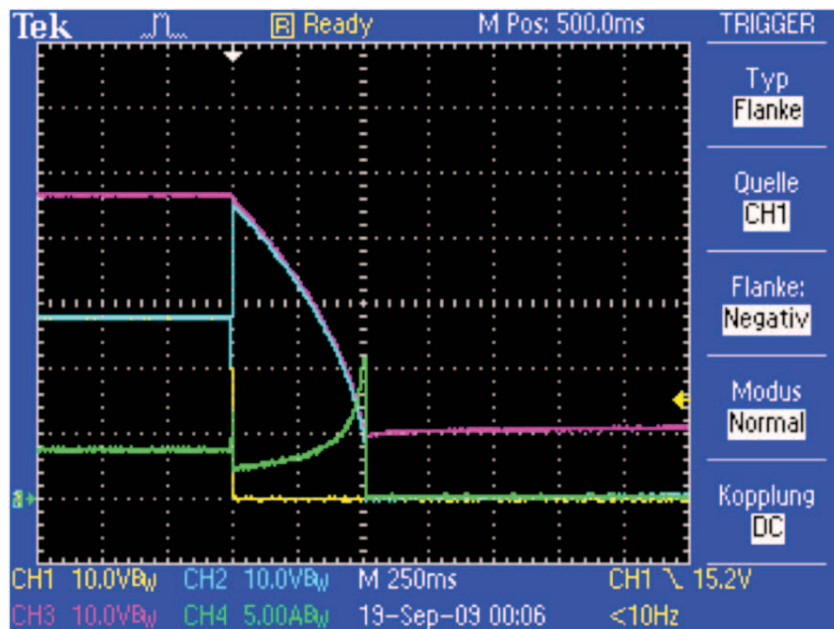


## Digital Outputs (DCFD, CDD)

Digital outputs at rising Vin and Vcap

Example:

C1 = 30 mF  
 Constant Power Load = 10.5 A  
 Vcap = 45 V  
 DCFP = 10 V

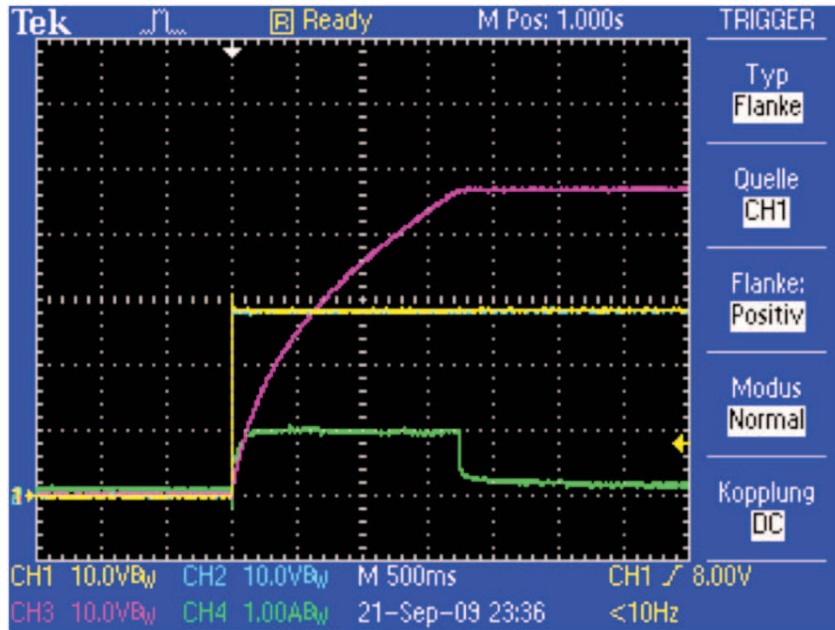


|          |      |
|----------|------|
| CH1 Vin  | DCFD |
| CH3 Vcap |      |

Digital outputs at falling Vin and Vcap

Example:


C1 = 30 mF  
 Constant Power Load = 10.5 A  
 Vcap = 45 V  
 DCFP = 10 V

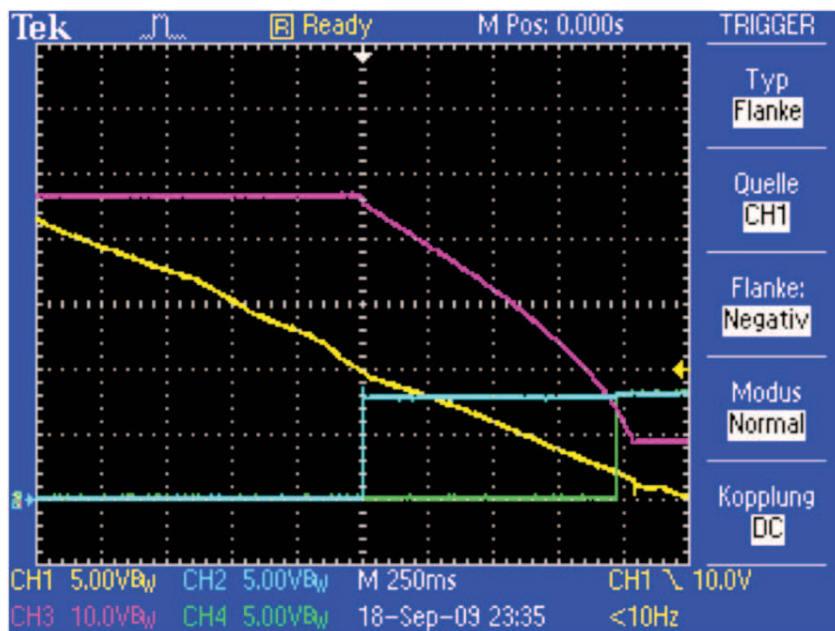

|          |      |
|----------|------|
| CH1 Vin  | DCFD |
| CH3 Vcap |      |



## Mechanical Details

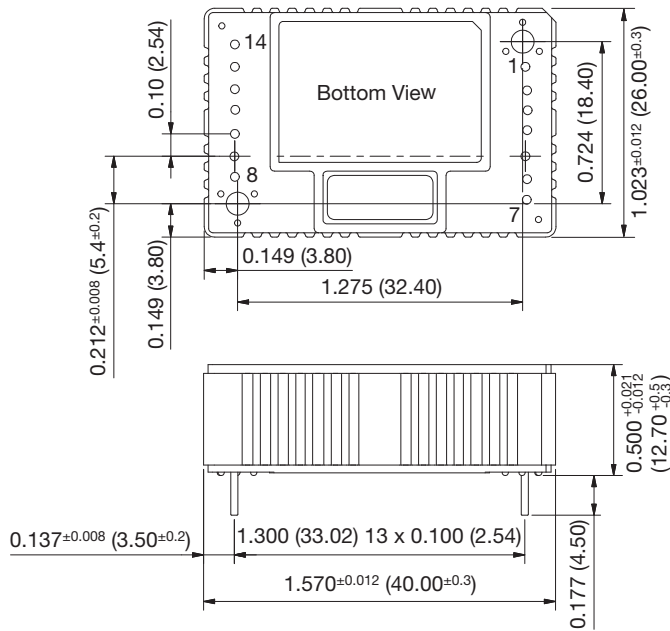

| Pin | Function                         | Pin | Function                         |
|-----|----------------------------------|-----|----------------------------------|
| 1   | Not fitted                       | 8   | Not fitted                       |
| 2   | Case                             | 9   | +Vout                            |
| 3   | Not fitted                       | 10  | +Vout                            |
| 4   | -Vin                             | 11  | Hold-up capacitor voltage, Vcap  |
| 5   | Input DC fail programming (DCFP) | 12  | Charge voltage programming (CVP) |
| 6   | +Vin                             | 13  | Input DC fail detect (DCFD)      |
| 7   | +Vin                             | 14  | Charge/discharge detect (CDD)    |

## Notes

1. Dimensions are in inches (mm)
2. Tolerance: ±0.02 (±0.5)
3. Weight: 0.06 lb (25 g)
4. Materials & Finish:

Pin - Diameter: 0.032 (0.8), Material: Cu Zn30 2.5 µm Ni  
 Finish: 0.2-0.5 µm AU (HV 170-200)

Mounting Hole - Diameter: 0.102 (2.6)  
 Case - Material: Aluminium (Al Mg Si 0.5), Finish: Chromated  
 Nameplate - Non-conductive plastic