imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Peak Emission Wavelength: 365nm

The MTSM365UV-D5120 is a ultraviolet light emitting diode with peak emission wavelength of 365nm. The High power UV LED is designed for high current operation and high power output operations. It incorporates state of the art SMD design and low thermal resistant material.

FEATURES

- > Super high power output
- > Low thermal resistance
- > SMT solderable
- > Designed for high current operation
- APPLICATIONS
 > UV Curing
- > Printing
- > Coating
- > Counterfeit Detection / Security



Absolute Maximum Ratings (Ta=25°C)

	-			
ITEMS	SYMBOL	RATINGS	UNIT	lead-free
Forward Current	If	500	mA	
Junction Temperature	Tj	90	٥C	
Operating Temperature	Topr	-10 to +85	٥C	
Storage Temperature	Tstg	-40 to +100	°C	

Note: Also available on PCB - Star Board MTSM365UV-D5120S

Electrical & Optical Characteristics (Ta = 25°C, RH=30%)

		N 1		,	
ITEMS	SYMBOL	CONDITION	TYPICAL	UNIT	
Peak Wavelength [1]	λρ	IF=500mA	365	nm	
Radiant Flux [2]	Фе [3]	IF=500mA	900	mW	
Radiant Flux	Φe	IF=500mA	220	mW	
Forward Voltage [4]	Vf	IF=500mA	3.6	V	
FWHM	Δλ	IF=500mA	9	nm	
Viewing Angle	20- 1/2	IF=500mA	120	deg	
Thermal Resistance	R⊖j-b [5]		5.5	°C/W	
Notes: [1] Poak wavelongth Measurem	ant talaranca is + 2nm				

[1] Peak wavelength Measurement tolerance is \pm 3nm

[2] Radiant Flux Measurement tolerance is ± 10%


[3] Φe is the Total Radiant Flux as measured with a radiometer with an integrated sphere


[4] Forward voltage measurement tolerance is ± 3%


[5] ROj-b is the thermal resistance between chip junction to PCB board bottom




Ultraviolet Emitter Product No: MTSM365V-D5120

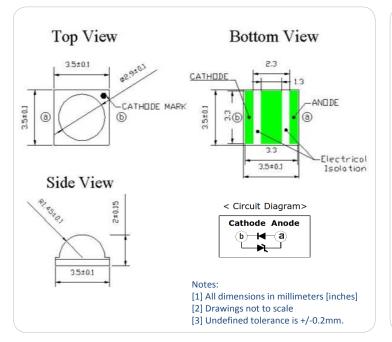







Recommended PCB Solder Pad



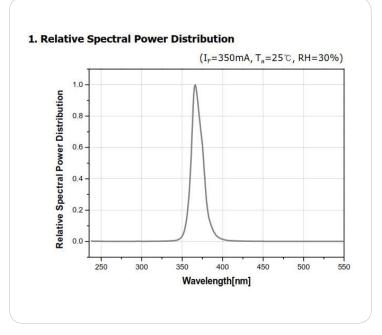

2. Forward Current VS Forward Voltage

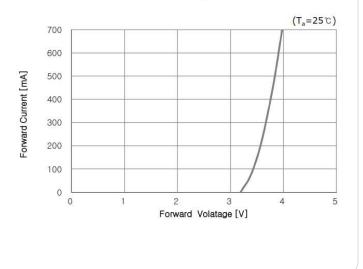

2016-10-14


2




Ultraviolet Emitter

Product No: MTSM365UV-D5120


T_a =25 °C, RH=30%

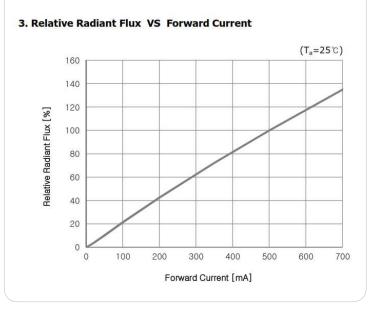


4. Peak Wavelength VS Forward Current



5. Relative Radiant Flux VS Ambient Temperature

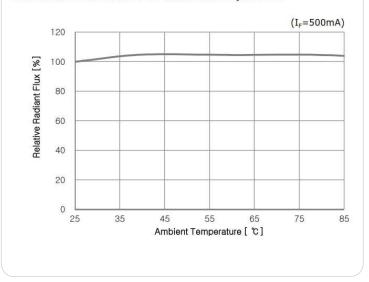



6. Peak Wavelength VS Ambient Temperature

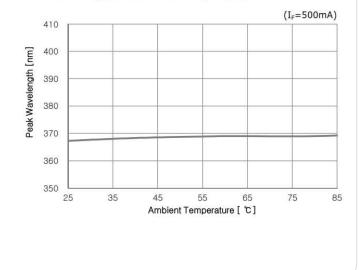




Ultraviolet Emitter Product No: MTSM365UV-D5120

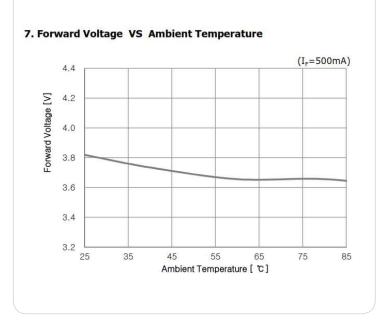

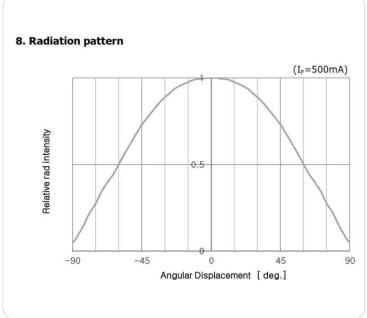


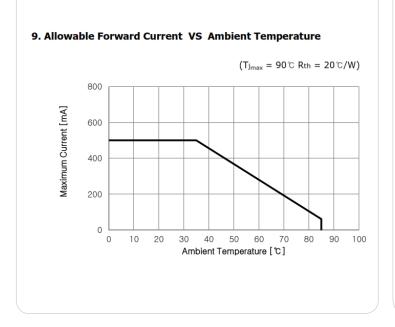



Ultraviolet Emitter Product No: MTSM365UV-D5120

Reflow Soldering Profile

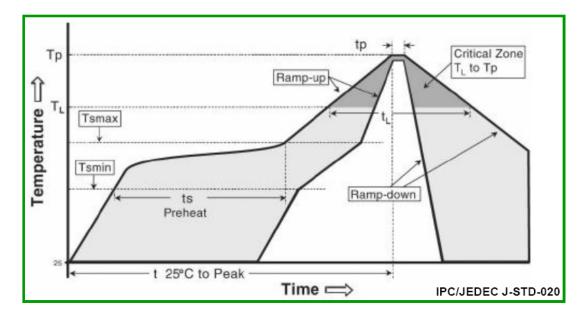

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (Ts_max to Tp)	3° C/second max.	3° C/second max.
Preheat - Temperature Min (Ts_min) - Temperature Max (Ts_max) - Time (Ts_min to Ts_max) (ts)	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-180 seconds
Time maintained above: - Temperature (TL) - Time (tL)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak Temperature (Tp)	215℃	260 °C
Time within 5°C of actual Peak Temperature (t)2	10-30 seconds	20-40 seconds
Ramp-down Rate	6 °C/second max.	6 °C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

* Caution

- 1. Reflow soldering should not be done more than one time.
- 2. Repairs should not be done after the LEDs have been soldered. When repair is unavoidable, suitable tools must be used.
- 3. Die slug is to be soldered.
- 4. When soldering, do not put stress on the LEDs during heating.
- 5. After soldering, do not warp the circuit board.
- 6. Recommend to use a convection type reflow machine with 7 ~ 8 zones.

The information contained herein is subject to change without notice.

5



Reliability

1. Test Result

Test Item	Test Condition	Note	# Failed /Tested
Room Temp. Operational Life	Ta=25℃, IF=500mA	1000hrs	0/5
High Temperature Operating Life	Ta=85ºC, I _F =60mA	1000hrs	0/5
Thermal shock	Ta max=120℃, Ta min=-40℃ 30min dwell/transfer time : 10sec, 1 cycle=1hr	200 cycles	0/22
Resistance to Soldering			0/10
Solderability	Temp=260 ±5 °C, 95% Coverage	1 time	0/10
ESD	R=1.5kΩ, C=100pF Voltage level=2kV	3 times Negative /positive	0/22

2. Failure Criteria

Parameter	Symbol	Test Conditions	Max. or Min. allowable shift value
Forward Voltage	V _F	IF=500mA	Max. Initial measurement x 1.2
Radiant Flux	Φ _e	IF=500mA	Min. Initial measurement x 0.7

Notes :

1. The value is measured after the test sample is cooled down to the room temperature.



Precaution for use


- 1) Storage
 - To avoid moisture penetration, we recommend storing UV LEDs in a dry box with a desiccant. The recommended temperature and Relative humidity are between 5°C and 30°C and below 50% respectively.
 - Replace the remained LEDs into the moisture-proof bag and reseal the bag after work to avoid those LEDs being exposed to moisture. Prolonged exposure to moisture can adversely affect the proper functioning of the LEDs.
 - If the package has been opened more than 4 week(MSL_2a) or the color of the desiccant changes, components should be dried for 10-24 hr at 60 \pm 5 $^\circ$ C
 - The conditions of resealing are as follows
 - Temperature is 5 to 30° C and Relative humidity is less than 60°
- 2) Handling Precautions
 - VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor them when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues.
 - In case of attaching LEDs, do not use adhesives that outgas organic vapor.
 - Soldering should be done as soon as possible after opening the moisture-proof bag.
 - Do not rapidly cool device after soldering.
 - Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.
 - Components should not be mounted on warped (non coplanar) portion of PCB.
 - The UV LED is encapsulated with a silicone resin for the highest flux efficiency. So it needs to be handled carefully as below
 - Avoid touching silicone resin parts especially with sharp tools such as pincettes(Tweezers)







- Avoid leaving fingerprints on silicone resin parts.
- Silicone resin will attract dust so use covered containers for storage.
- When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that excessive mechanical pressure on the surface of the resin must be prevented.
- It is not recommend to cover the silicone resin of the LEDs with other resin (epoxy, urethane, etc).
- 3) Safety for eyes and skin
 - The Products emit high intensity ultraviolet light which can make your eyes and skin harmful, So do not look directly into the UV light and wear protective equipment during operation.
- 4) Cleaning
 - This device is not allowed to be used in any type of fluid such as water, oil, organic solvent, etc.
- 5) Others
 - The appearance and specifications of the product may be modified for improvement without notice.
 - When the LEDs are in operation the maximum current should be decided after measuring the package temperature.
 - The driving circuit must be designed to allow forward voltage only when it is ON or OFF. If the
 reverse voltage is applied to LED, migration can be generated resulting in LED damage.
 - · Do not handle this product with acid or sulfur material in sealed space.

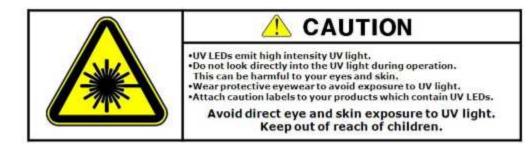

8



Ultraviolet Emitter Product No: MTSM365UV-D5120

Reel Packaging

