



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DUAL SINGLE-SUPPLY OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

NJM2119 is an ultra-low input offset voltage and bias current, low drift and single supply dual operational amplifier. NJM2119 is suitable for a high accurate instrumental amplifier and sensor amplifier.


■ FEATURES

- Single Supply
- Operating Voltage (+4V~+36V)
- Low Input Offset Voltage (90 μ V typ.)
- Low Input Bias Current (18nA typ.)
- Low Input Offset Voltage Drift (4.0 μ V/ $^{\circ}$ C typ.)
- Package Outline DIP8,DMP8
- Bipolar Technology

■ PIN CONFIGURATION



■ PACKAGE OUTLINE



NJM2119D



NJM2119M

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.V⁻
- 5.B +INPUT
- 6.B -INPUT
- 7.B OUTPUT
- 8.V⁺

NJM2119

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ (V ⁺ /V ⁻)	36 (± 18)	V
Input Voltage	V _{IC}	-0.3~+36	V
Differential Input Voltage	V _{ID}	± 36 (note)	V
Power Dissipation	P _D	(DIP8) 700 (DMP8) 300	mW
Operating Temperature Range	T _{opr}	-40~+85	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

(note) For supply voltage less than ±18V, the absolute maximum input voltage is equal to the supply voltage.


■ ELECTRICAL CHARACTERISTICS

(V⁺=5.0V, Ta=25±2°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S ≤50Ω	-	90	450	μV
V _{IO} Drift	ΔV _{IO} /ΔT	Ta=-30~+85°C	-	4.0	-	μV/°C
Input Offset Current	I _{IO}		-	0.3	7.0	nA
Input Bias Current	I _B		-	18	50	nA
Operating Current	I _{CC}	R _L =∞	-	1.0	1.5	mA
Input Common Mode Voltage Range	V _{ICM}		0~3.5	-	-	V
Common Mode Rejection Ratio	CMR		85	100	-	dB
Supply Voltage Rejection Ratio	SVR		85	100	-	dB
Large Signal Voltage Gain	A _V	R _L =600Ω	90	105	-	dB
Maximum Output Voltage Swing 1	+V _{OM1}	R _L =600Ω	3.4	4.0	-	V
Maximum Output Voltage Swing 1	-V _{OM1}	R _L =600Ω	-	5.0	10.0	mV
Maximum Output Voltage Swing 2	-V _{OM2}	I _{SINK} =1mA	-	220	350	mV
Slew Rate	SR	A _V =1	-	0.3	-	V/μs
Gain Bandwidth Product	GB		-	1.0	-	MHz

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage
($T_a=25^\circ\text{C}$)

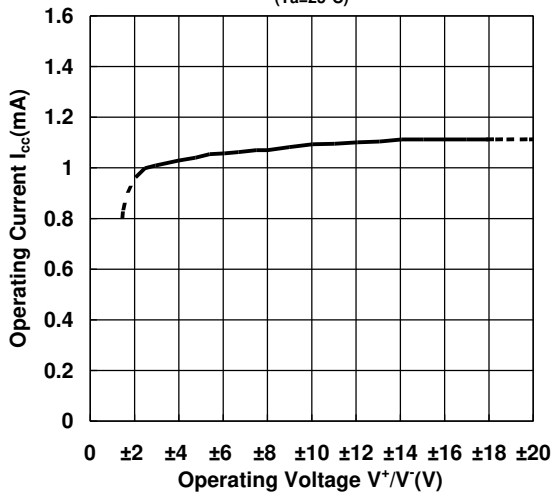


Maximum Output Voltage Swing vs. Operating Voltage
($T_a=25^\circ\text{C}$, $R_L=2\text{k}\Omega$)

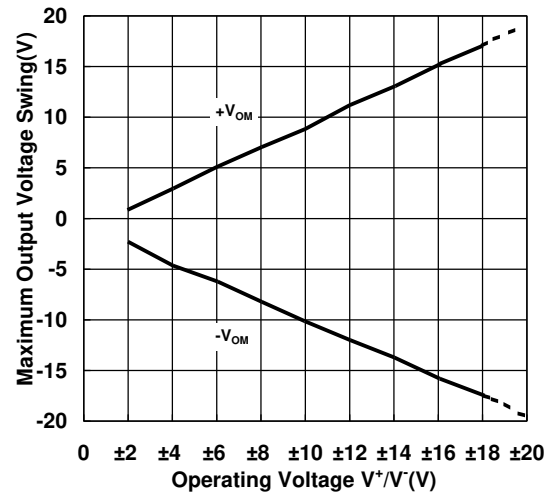


Output Source Current
($V^+=5\text{V}$, $T_a=25^\circ\text{C}$)

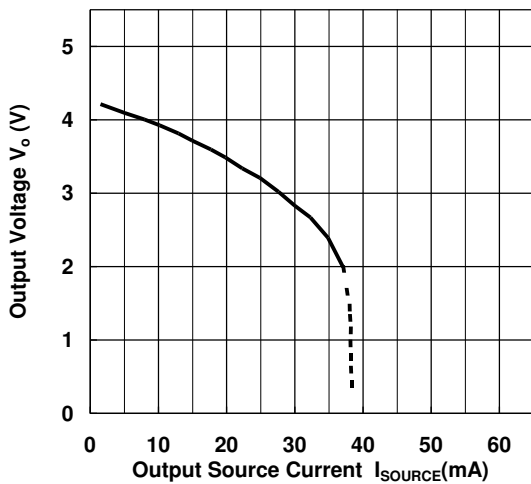


Output Sink Current
($V^+=5\text{V}$, $T_a=25^\circ\text{C}$)

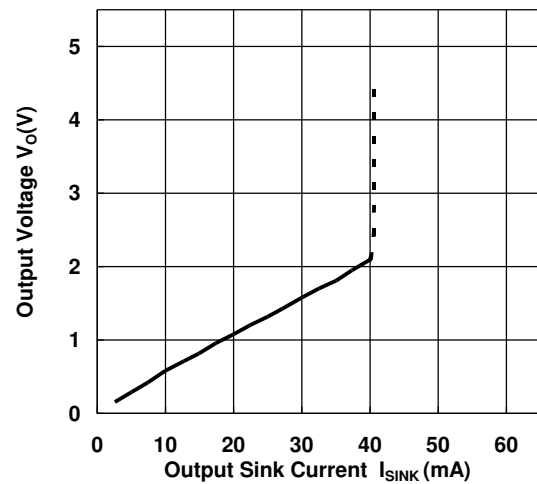





Voltage Gain vs. Frequency
($V^+/V^-=\pm 2.5\text{V}$, $R_L=2\text{k}\Omega$, $A_v=40\text{dB}$, $T_a=25^\circ\text{C}$)

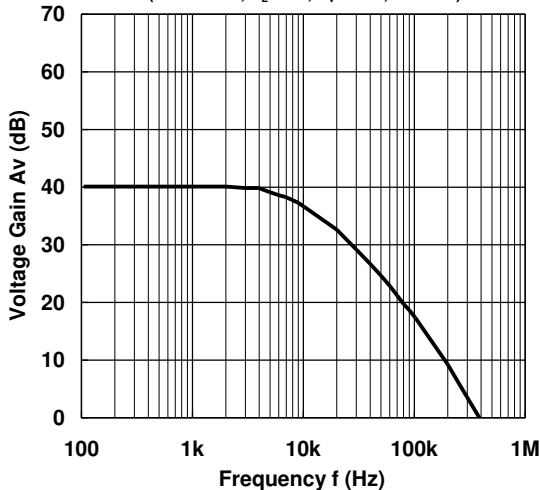

Maximum Output Voltage Swing vs. Load Resistance
($V^+=5\text{V}$, $T_a=25^\circ\text{C}$)

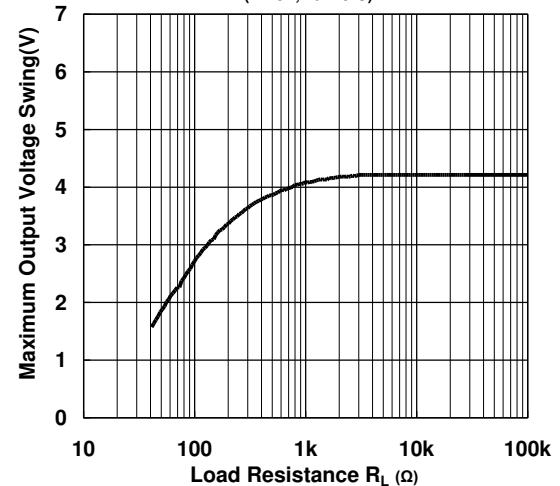

■ TYPICAL CHARACTERISTICS

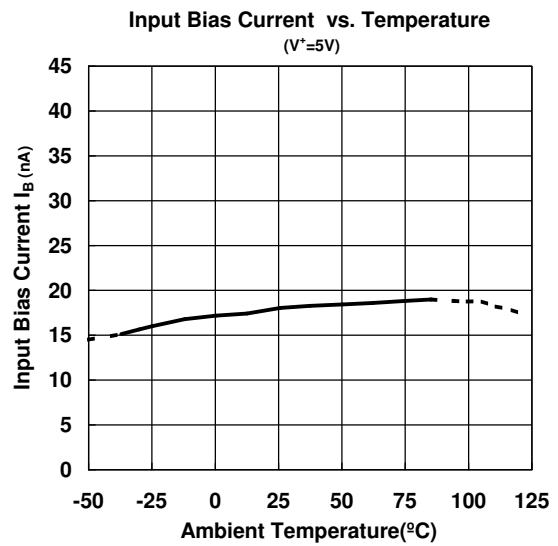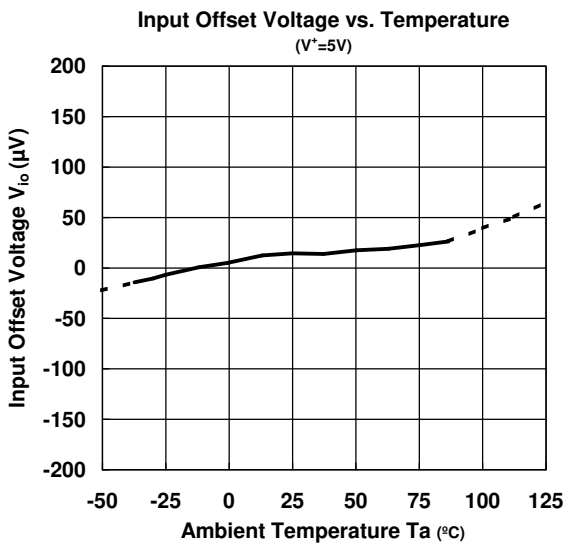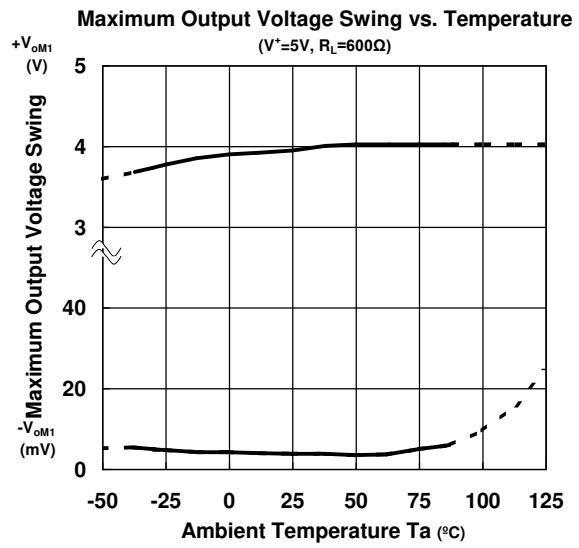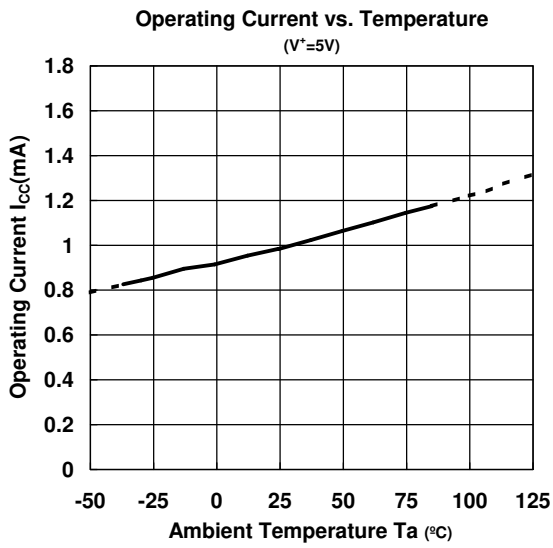

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.