



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Small Sized Quartz Crystal Oscillator

### ■GENERAL DESCRIPTION

The NJU6366 series is a C-MOS fundamental quartz crystal oscillator that consists of an oscillation amplifier, 3-stage divider and 3-state output buffer.

The 3-stage divider generates only one frequency selected of  $f_0, f_0/2, f_0/4$  and  $f_0/8$  by internal circuits is output.

The oscillation amplifier is realized very low stand-by current using NAND circuit.

The 3-state output buffer is C-MOS compatible

Furthermore, the package is small-sized MTP-6.

### ■PACKAGE OUTLINE




NJU6366XC-C    NJU6366XF1

### ■FEATURES

- Operating Voltage                                2.0 to 5.5V
- Maximum Oscillation Frequency            50MHz
- Low Operating Current
- High Fan-out                                         $I_{OH}/I_{OL}=4mA @2.5V$
- 3-Stage Divider                                    One of  $f_0, f_0/2, f_0/4$  and  $f_0/8$
- Oscillation Stop and Output Stand-by Function
- 3-State Output Buffer
- Oscillation Capacitors  $C_g$  and  $C_d$  on-chip
- Package Outline                                    Thin-Chip/MTP-6
- C-MOS Technology

### ■PAD LOCATION/PIN CONFIGURATION

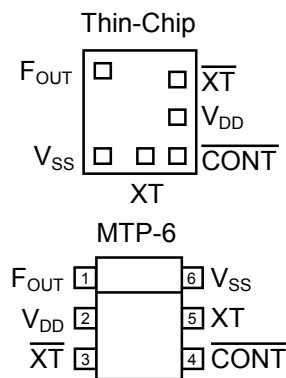

### ■LINE-UP TABLE


Type No.	$F_{OUT}$	Internal Connect		$C_g/C_d$
		Connect	Non Connect	
NJU6366	A $f_0$	A Line	B,C,D Line	23/23pF
	B $f_0/2$	B Line	A,C,D Line	23/23pF
	C $f_0/4$	C Line	A,B,D Line	23/23pF
	D $f_0/8$	D Line	A,B,C Line	23/23pF

### ■COORDINATES

Pad Name	X	Y
$F_{OUT}$	-207	247
$V_{SS}$	-207	-247
XT	33	-247
$\overline{CONT}$	207	-247
$V_{DD}$	207	-17
$\overline{XT}$	207	172

Starting Point: Chip Center    Unit[um]  
 Chip Size: 0.67x0.75mm  
 Thin-Chip Thickness(-C): 260±20um  
 Pad Size: 90x90um  
 Die Substrate:  $V_{DD}$  Level

### ■BLOCK DIAGRAM

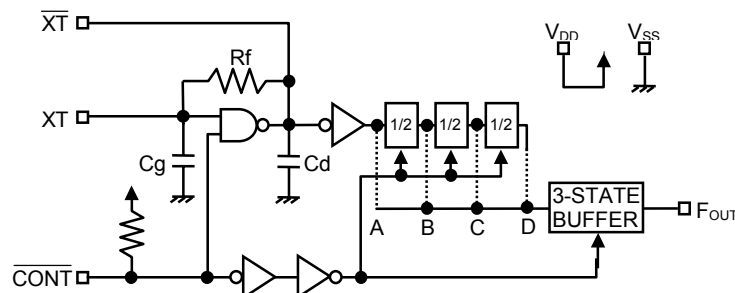

## ■ TERMINAL DESCRIPTION

SYMBOL	FUNCTION	
$\overline{\text{CONT}}$	Oscillation and 3-state Output Buffer Control	
	$\overline{\text{CONT}}$	$F_{\text{OUT}}$
	H or OPEN	Output either one frequency selected of $f_0$ , $f_0/2$ , $f_0/4$ and $f_0/8$ Note1)
	L	Oscillation Stop and High impedance Output
$\overline{\text{XT}}$	Quartz Crystal Connecting Terminals	
$V_{\text{SS}}$	$V_{\text{SS}}=0\text{V}$	
$F_{\text{OUT}}$	Frequency Output	
$V_{\text{DD}}$	$V_{\text{DD}}=2.5\text{V}/3.0\text{V}/5.0\text{V}$	

Note1) Refer to the line-up table.

## ■ ABSOLUTE MAXIMUM RATINGS

( $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	$V_{\text{DD}}$	-0.5 to +7.0	V
Input Voltage	$V_{\text{IN}}$	$V_{\text{SS}}-0.5$ to $V_{\text{DD}}+0.5$	V
Output Voltage	$V_{\text{O}}$	-0.5 to $V_{\text{DD}}+0.5$	V
Input Current	$I_{\text{IN}}$	$\pm 10$	mA
Output Current	$I_{\text{O}}$	$\pm 25$	mA
Power Dissipation Note4)	$P_{\text{D}}$	200(MTP-6)	mW
Operating Temperature Range	$T_{\text{opr}}$	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	$T_{\text{stg}}$	-55 to +125	$^\circ\text{C}$

Note2) If the supply voltage( $V_{\text{DD}}$ ) is less than 7.0V, the input voltage must not over the  $V_{\text{DD}}$  level though 7.0V is limit specified.

Note3) Decoupling capacitor should be connected between  $V_{\text{DD}}$  and  $V_{\text{SS}}$  due to the stabilized operation for the circuit.

Note4) The power dissipation is the maximum value at only the package.

## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	V <sub>DD</sub>		2.0		5.5	V

(V<sub>DD</sub>=2.5V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I <sub>DD</sub>	A version, fosc=16MHz, C <sub>L</sub> =15pF			5	mA
		B version, fosc=16MHz, C <sub>L</sub> =15pF			4	
		C version, fosc=16MHz, C <sub>L</sub> =15pF			3	
		D version, fosc=16MHz, C <sub>L</sub> =15pF			3	
Oscillation Stopping Current	I <sub>STB</sub>	$\overline{\text{CONT}} = V_{SS}$ , No load		2	5	uA
Stand-by Current	I <sub>st</sub>	$\overline{\text{CONT}} = \text{XT} = V_{SS}$ , No load Note5)			1	uA
Input Voltage	V <sub>IH</sub>		2.0		2.5	V
	V <sub>IL</sub>		0		0.5	V
Output Current	I <sub>OH</sub>	V <sub>OH</sub> =2.2V	4			mA
	I <sub>OL</sub>	V <sub>OL</sub> =0.3V	4			mA
Input Current	I <sub>IN</sub>	$\overline{\text{CONT}} = 0.8V_{DD}$		7.5	12.0	uA
		$\overline{\text{CONT}} = 0.2V_{DD}$		1.2	2.0	uA
3-state Off Leakage Current	I <sub>OZ</sub>	$\overline{\text{CONT}} = V_{SS}$ , F <sub>OUT</sub> = V <sub>DD</sub> or V <sub>SS</sub>			±0.1	uA
Feedback Resistance	R <sub>f</sub>			255		kΩ
Internal Capacitor	C <sub>g</sub> /C <sub>d</sub>	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	F <sub>MAX</sub>		50			MHz
Output Signal Symmetry	SYM	C <sub>L</sub> =15pF, @V <sub>DD</sub> /2	45	50	55	%
		C <sub>L</sub> =30pF, @V <sub>DD</sub> /2	45	50	55	
Output Signal Rise Time	tr	C <sub>L</sub> =15pF, 10% to 90%		3	6	ns
		C <sub>L</sub> =30pF, 10% to 90%		3	6	
Output Signal Fall Time	tf	C <sub>L</sub> =15pF, 90% to 10%		3	6	ns
		C <sub>L</sub> =30pF, 90% to 10%		3	6	
Output Disable time	t <sub>PLZ</sub>	C <sub>L</sub> =15pF, R <sub>UP</sub> =10kΩ			250	ns
Output Enable Time	t <sub>PZL</sub>	C <sub>L</sub> =15pF, R <sub>UP</sub> =10kΩ			250	ns

Note5) Excluding input current on  $\overline{\text{CONT}}$  Terminal.

( $V_{DD}=3.0V, T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	$I_{DD}$	A version, fosc=16MHz, $C_L=15pF$			6	mA
		B version, fosc=16MHz, $C_L=15pF$			5	
		C version, fosc=16MHz, $C_L=15pF$			4	
		D version, fosc=16MHz, $C_L=15pF$			4	
Oscillation Stopping Current	$I_{STB}$	$\overline{CONT} = V_{SS}$ , No load		2	5	uA
Stand-by Current	$I_{st}$	$\overline{CONT} = XT = V_{SS}$ , No load Note5)			1	uA
Input Voltage	$V_{IH}$		2.4		3.0	V
	$V_{IL}$		0		0.6	V
Output Current	$I_{OH}$	$V_{OH}=2.7V$	5			mA
	$I_{OL}$	$V_{OL}=0.3V$	5			mA
Input Current	$I_{IN}$	$\overline{CONT} = 0.8V_{DD}$		10.0	15.0	uA
		$\overline{CONT} = 0.2V_{DD}$		1.8	3.0	uA
3-state Off Leakage Current	$I_{OZ}$	$\overline{CONT} = V_{SS}$ , $F_{OUT} = V_{DD}$ or $V_{SS}$			$\pm 0.1$	uA
Feedback Resistance	$R_f$			255		k $\Omega$
Internal Capacitor	$C_g/C_d$	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	$F_{MAX}$		50			MHz
Output Signal Symmetry	SYM	$C_L=15pF, @V_{DD}/2$	45	50	55	%
		$C_L=30pF, @V_{DD}/2$	45	50	55	
Output Signal Rise Time	tr	$C_L=15pF, 10\%$ to 90%		3	6	ns
		$C_L=30pF, 10\%$ to 90%		3	6	
Output Signal Fall Time	tf	$C_L=15pF, 90\%$ to 10%		3	6	ns
		$C_L=30pF, 90\%$ to 10%		3	6	
Output Disable time	$t_{PLZ}$	$C_L=15pF, R_{UP}=10k\Omega$			200	ns
Output Enable Time	$t_{PZL}$	$C_L=15pF, R_{UP}=10k\Omega$			200	ns

Note5) Excluding input current on  $\overline{CONT}$  Terminal.



( $V_{DD}=5.0V, T_a=25^{\circ}C$ )

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	$I_{DD}$	A version, fosc=16MHz, $C_L=15pF$			10	mA
		B version, fosc=16MHz, $C_L=15pF$			9	
		C version, fosc=16MHz, $C_L=15pF$			9	
		D version, fosc=16MHz, $C_L=15pF$			8	
Oscillation Stopping Current	$I_{STB}$	$\overline{CONT} = V_{SS}$ , No load		5	10	uA
Stand-by Current	$I_{st}$	$\overline{CONT} = XT = V_{SS}$ , No load Note5)			1	uA
Input Voltage	$V_{IH}$		3.5		5.0	V
	$V_{IL}$		0		1.5	V
Output Current	$I_{OH}$	$V_{OH}=4.5V$	8			mA
	$I_{OL}$	$V_{OL}=0.5V$	8			mA
Input Current	$I_{IN}$	$\overline{CONT} = 0.8V_{DD}$		27.0	40.0	uA
		$\overline{CONT} = 0.2V_{DD}$		5.5	8.0	uA
3-state Off Leakage Current	$I_{OZ}$	$\overline{CONT} = V_{SS}$ , $F_{OUT} = V_{DD}$ or $V_{SS}$			$\pm 0.1$	uA
Feedback Resistance	$R_f$			255		k $\Omega$
Internal Capacitor	$C_g/C_d$	fosc=16MHz		23/23		pF
Maximum Oscillation Frequency	$F_{MAX}$		50			MHz
Output Signal Symmetry	SYM	$C_L=15pF, @V_{DD}/2$	45	50	55	%
		$C_L=30pF, @V_{DD}/2$	45	50	55	
Output Signal Rise Time	$t_r$	$C_L=15pF, 10\%$ to 90%		3	6	ns
		$C_L=30pF, 10\%$ to 90%		3	6	
Output Signal Fall Time	$t_f$	$C_L=15pF, 90\%$ to 10%		3	6	ns
		$C_L=30pF, 90\%$ to 10%		3	6	
Output Disable time	$t_{PLZ}$	$C_L=15pF, R_{UP}=10k\Omega$			100	ns
Output Enable Time	$t_{PZL}$	$C_L=15pF, R_{UP}=10k\Omega$			100	ns



Note5) Excluding input current on  $\overline{CONT}$  Terminal.

■ MEASUREMENT CIRCUITS



(1) Output Signal Symmetry ( $C_L=15\text{pF}$ )

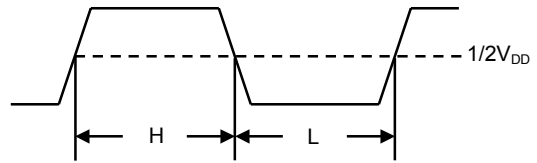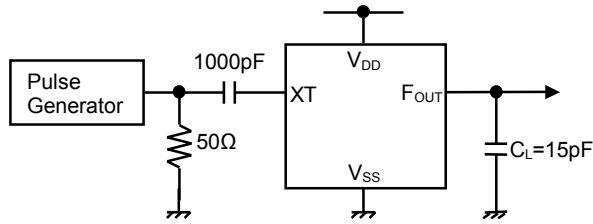

(2) Output Signal Rise/Fall Time ( $C_L=15\text{pF}$ )

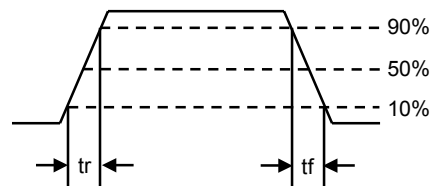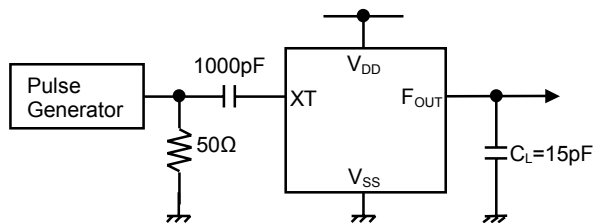

(3) Output Disable/Enable Time ( $C_L=15\text{pF}, R_{UP}=10\text{k}\Omega$ )

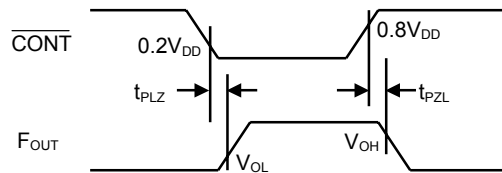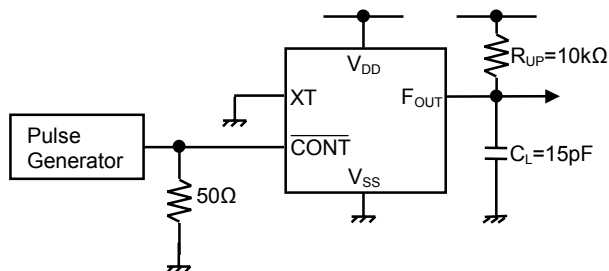

[CAUTION]  
 The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.