imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





April 2017

Inductors for Decoupling Circuits

Wound Ferrite

NLC Series

NLC453232 Type

NLC453232

4532 [1812 inch]*

* Dimensions Code JIS[EIA]

⊗TDK

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

| | IINDERS |
|--|---|
| The storage period is less than 6 months. Be sure to follow the stores. If the storage period elapses, the soldering of the terminal electron. | |
| \bigcirc Do not use or store in locations where there are conditions such a | s gas corrosion (salt, acid, alkali, etc.). |
| Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature does not exceed 150°C. | e difference between the solder temperature and chip temperature |
| Soldering corrections after mounting should be within the range of If overheated, a short circuit, performance deterioration, or lifespa | |
| When embedding a printed circuit board where a chip is mounted the overall distortion of the printed circuit board and partial distortion | |
| Self heating (temperature increase) occurs when the power is turr design. | ned ON, so the tolerance should be sufficient for the set thermal |
| Carefully lay out the coil for the circuit board design of the non-mag A malfunction may occur due to magnetic interference. | netic shield type. |
| ◯ Use a wrist band to discharge static electricity in your body throug | h the grounding wire. |
| \bigcirc Do not expose the products to magnets or magnetic fields. | |
| \bigcirc Do not use for a purpose outside of the contents regulated in the o | delivery specifications. |
| The products listed on this catalog are intended for use in general equipment, home appliances, amusement equipment, computer equipment, industrial robots) under a normal operation and use of The products are not designed or warranted to meet the requirement quality require a more stringent level of safety or reliability, or who society, person or property. If you intend to use the products in the applications listed below or set forth in the each catalog, please contact us. | equipment, personal equipment, office equipment, measurement ondition. ents of the applications listed below, whose performance and/or |
| Aerospace/Aviation equipment Transportation equipment (cars, electric trains, ships, etc.) Medical equipment Power-generation control equipment Atomic energy-related equipment Seabed equipment Transportation control equipment When designing your equipment even for general-purpose applicatio | (8) Public information-processing equipment (9) Military equipment (10) Electric heating apparatus, burning equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (13) Other applications that are not considered general-purpose applications |

Inductors for Decoupling Circuits

Wound Ferrite

⊗TDK

Product compatible with RoHS directive Compatible with lead-free solders

Overview of NLC453232 Type

FEATURES


O Resin mold type wound inductor for decoupling circuits.

 \bigcirc E-12 Series, wide lineup compatible with K (±10%) tolerance allows for various usages.

APPLICATION

Smart meters, AV equipment, xDSL, electronic devices for communications infrastructure such as mobile base stations, industrial equipment, other

PART NUMBER CONSTRUCTION



OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

| | Temperat | ure range | Package quantity | Individual weight |
|-----------|----------------------|-----------------------|------------------|-------------------|
| Туре | Operating | Storage | | |
| | temperature* (°C) | temperature** (°C) | (pieces/reel) | (mg) |
| NLC453232 | -40 to +105 | -40 to +105 | 500 | 180 |

* Operating temperature range includes self-temperature rise.


** The Storage temperature range is for after the circuit board is mounted.

O RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

(4/10)


NLC453232 Type

RECOMMENDED REFLOW PROFILE

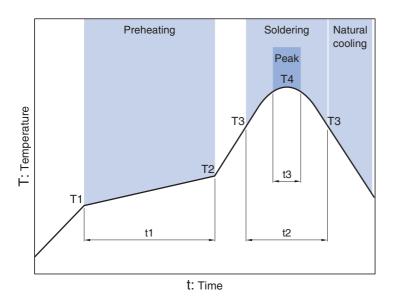

Preheating Soldering Peak Temp. Time Temp. Time Temp. Time **T1** T2 **T**4 t1 ТЗ t2 t3 150°C 180°C 90 to 120s 230°C 255°C 40s 10s max.


SHAPE & DIMENSIONS

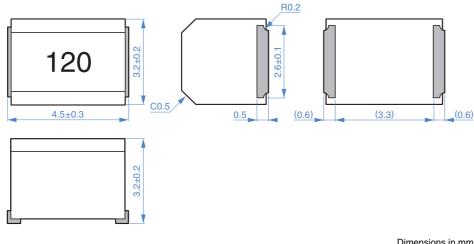



Dimensions in mm

RECOMMENDED LAND PATTERN



Dimensions in mm

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

⊗TDK

NLC453232 Type

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE

| L | | Q | L, Q measuring frequency | DC resistance | Rated current* | Part No. | |
|------|-----------|------|-----------------------------|---------------|----------------|--------------------|--|
| (µH) | Tolerance | min. | (MHz) | (Ω)max. | (mA)max. | | |
| 1 | ±10% | 10 | 7.96 | 0.11 | 1050 | NLC453232T-1R0K-PF | |
| 1.2 | ±10% | 10 | 7.96 | 0.12 | 1000 | NLC453232T-1R2K-PF | |
| 1.5 | ±10% | 10 | 7.96 | 0.15 | 950 | NLC453232T-1R5K-PF | |
| 1.8 | ±10% | 10 | 7.96 | 0.16 | 900 | NLC453232T-1R8K-PF | |
| 2.2 | ±10% | 10 | 7.96 | 0.18 | 850 | NLC453232T-2R2K-PF | |
| 2.7 | ±10% | 10 | 7.96 | 0.2 | 800 | NLC453232T-2R7K-PF | |
| 3.3 | ±10% | 10 | 7.96 | 0.22 | 750 | NLC453232T-3R3K-PF | |
| 3.9 | ±10% | 10 | 7.96 | 0.24 | 700 | NLC453232T-3R9K-PF | |
| 4.7 | ±10% | 10 | 7.96 | 0.27 | 650 | NLC453232T-4R7K-PF | |
| 5.6 | ±10% | 10 | 7.96 | 0.3 | 650 | NLC453232T-5R6K-PF | |
| 6.8 | ±10% | 10 | 7.96 | 0.35 | 600 | NLC453232T-6R8K-PF | |
| 8.2 | ±10% | 10 | 7.96 | 0.4 | 600 | NLC453232T-8R2K-PF | |
| 10 | ±10% | 10 | 2.52 | 0.5 | 550 | NLC453232T-100K-PF | |
| 12 | ±10% | 10 | 2.52 | 0.6 | 500 | NLC453232T-120K-PF | |
| 15 | ±10% | 10 | 2.52 | 0.7 | 450 | NLC453232T-150K-PF | |
| 18 | ±10% | 10 | 2.52 | 0.8 | 400 | NLC453232T-180K-PF | |
| 22 | ±10% | 10 | 2.52 | 0.9 | 370 | NLC453232T-220K-PF | |
| 27 | ±10% | 10 | 2.52 | 1.2 | 330 | NLC453232T-270K-PF | |
| 33 | ±10% | 10 | 2.52 | 1.4 | 300 | NLC453232T-330K-PF | |
| 39 | ±10% | 10 | 2.52 | 1.6 | 280 | NLC453232T-390K-PF | |
| 47 | ±10% | 10 | 2.52 | 1.9 | 260 | NLC453232T-470K-PF | |
| 56 | ±10% | 10 | 2.52 | 2.2 | 240 | NLC453232T-560K-PF | |
| 68 | ±10% | 10 | 2.52 | 2.6 | 220 | NLC453232T-680K-PF | |
| 82 | ±10% | 10 | 2.52 | 3.5 | 200 | NLC453232T-820K-PF | |
| 100 | ±10% | 20 | 0.796 | 4 | 180 | NLC453232T-101K-PF | |
| 120 | ±10% | 20 | 0.796 | 4.5 | 160 | NLC453232T-121K-PF | |
| 50 | ±10% | 20 | 0.796 | 6.5 | 140 | NLC453232T-151K-PF | |
| 180 | ±10% | 20 | 0.796 | 7.5 | 120 | NLC453232T-181K-PF | |
| 220 | ±10% | 20 | 0.796 | 9 | 120 | NLC453232T-221K-PF | |
| 270 | ±10% | 20 | 0.796 | 11 | 100 | NLC453232T-271K-PF | |
| 330 | ±10% | 20 | 0.796 | 13 | 90 | NLC453232T-331K-PF | |

* Rated current: smaller value of either Idc1 or Idc2.

Idc1: When based on the inductance change rate (10% below the initial L value)

Idc2: When based on the temperature increase (Temperature increase of 20°C by self heating)

O Measurement equipment

| Product No. | Manufacturer |
|---------------------|-----------------------|
| 4194A+16085A+16093B | Keysight Technologies |
| VP-2941A | Panasonic |
| | |

* Equivalent measurement equipment may be used.


4294A

(7/10)

NLC453232 Type

ELECTRICAL CHARACTERISTICS

L FREQUENCY CHARACTERISTICS GRAPH

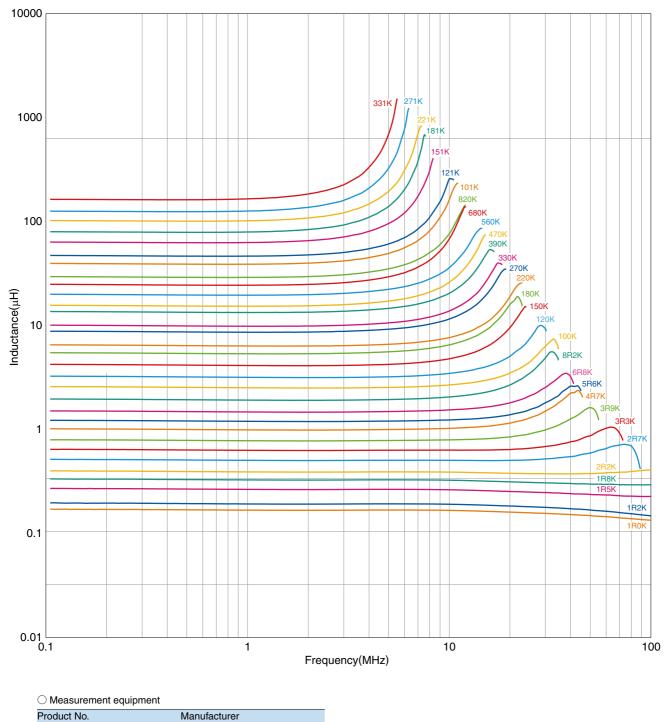

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

Keysight Technologies


* Equivalent measurement equipment may be used.

(8/10)

NLC453232 Type

ELECTRICAL CHARACTERISTICS

□ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

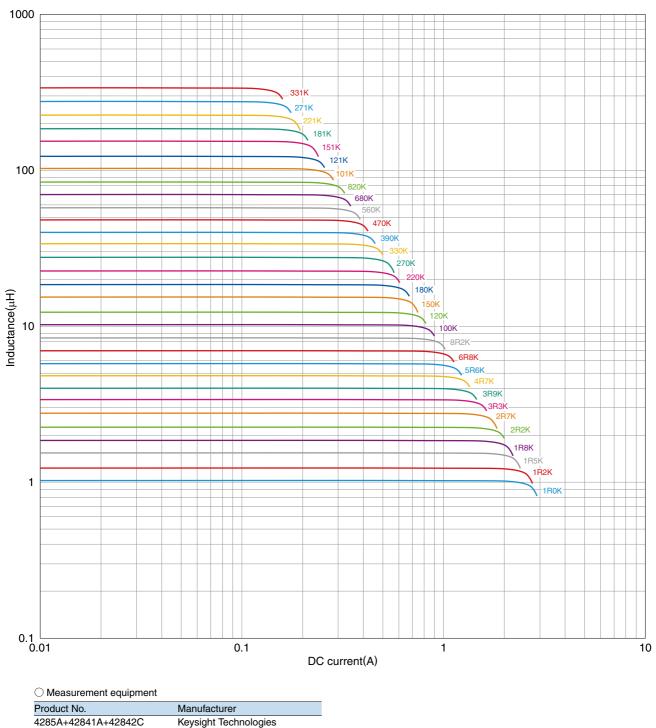


* Equivalent measurement equipment may be used.

(9/10)

NLC453232 Type

ELECTRICAL CHARACTERISTICS

□ IMPEDANCE FREQUENCY CHARACTERISTICS GRAPH

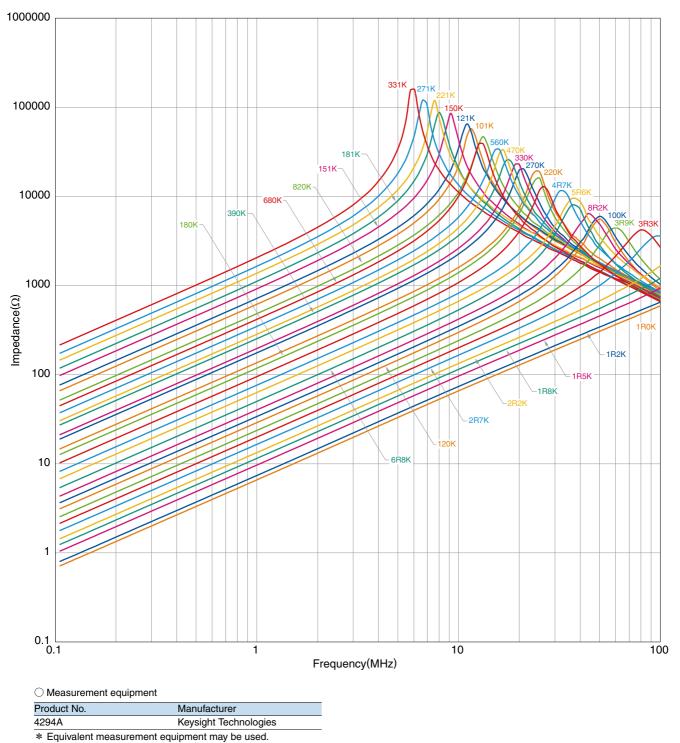


⊗TDK

INDUCTORS

NLC453232 Type

PACKAGING STYLE


REEL DIMENSIONS



| Туре | А | W1 | W2 | Ν | E |
|-----------|------|----|----|-----|-----|
| NLC453232 | ø180 | 13 | 17 | ø60 | 0.5 |

* These values are typical values.

TAPE DIMENSIONS

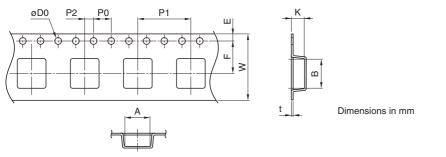

| Туре | Α | В | øD0 | Е | F | P0 | P1 | P2 | W | K | t |
|-----------|-----|-----|------------|----------|-----------|-----------|-----------|-----------|-----------|-----|-----|
| NLC453232 | 3.6 | 4.9 | 1.5+0.1/-0 | 1.75±0.1 | 5.50±0.05 | 4.00±0.10 | 8.00±0.10 | 2.00±0.05 | 12.0±0.30 | 3.2 | 0.4 |