# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






### WWW.LUNAINC.COM

# **Optocoupler NSL 32SR2**

### **Precision – Control – Results**

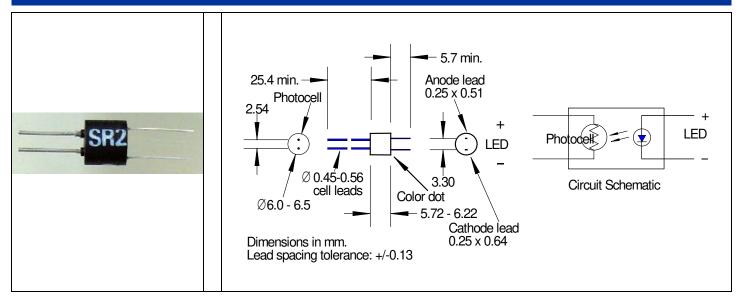

### DESCRIPTION

This optocoupler consists of an LED input optically coupled to a photocell. The photocell resistance is high when the LED current is "off" and low resistance when the LED current is "on".

### **FEATURES**

- Compact, moisture resistant package •
- Low LED current •
- Very low "on" resistance
- Passive resistance output •
- Low distortion

### **APPLICATIONS**

Industrial

RELIABILITY

Contact Luna for recommendations on specific test conditions and procedures.

### **ABSOLUTE MAXIMUM RATINGS**

SYMBOL	MIN		МАХ	UNITS	
Isolation Voltage	-	-	2000	V	$T_a = 23^{\circ}C$ UNLESS OTHERWISE NOTED
Operating Temperature	-40	to	+75	°C	Non condensing
Soldering Temperature	-40	-	+75	°C	-
Soldering Temperature	-	-	+260	°C	>2mm from case for < 5 sec.
NOTE					

### NOTE:

1.Measure after 1 minute ON @ I<sub>F</sub> = 20mA and followed by 10 sec OFF

2. Print "NSL-32SR2" and date code YYWW

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

Page 1/2

REV 01-04-16



### WWW.LUNAINC.COM

## Optocoupler NSL 32SR2

### **Precision – Control – Results**

**OPTO-ELECTRICAL PARAMETERS** 

 $T_a = 23$ °C UNLESS NOTED OTHERWISE

PARAMETER	TEST CONDITIONS	MIN	ТҮР	MAX	UNITS
LED			•	•	
Forward Current	-	-	-	25	mA
Forward Current	I <sub>f</sub> = 20 mA	-	-	2.5	V
Reverse Current	$V_{R} = 4V$	-		10	μΑ
CELL					
Maximum Cell Voltage	Peak AC or DC	-	-	60	V
Power Dissipation	2	-	-	50	mW
COUPLED					
On Resistance	I <sub>f</sub> =20 mA	-	-	40	Ω
	I <sub>f</sub> =5 mA	-	140	-	Ω
Off Resistance	10 sec after $I_f = V-0.5$ Vdc on cell	25	5	-	MΩ
Rise Time	Time to reach 63% of final conductive @ $I_f = 5mA$	-	5	-	m sec
Decay Time	Time to reach 100K $\Omega$ from removal of I <sub>f</sub> = 5mA	-	80	-	m sec
Cell Temp Coefficient	I <sub>f</sub> > 5 mA	-	0.7	-	%/K

### NOTE:


1.Derate linearly to 0 at 75°C

2.>2 mm from case for <5 sec.

3."FULLTONE OPTO-1" and date code YYWW

4. Approved LED APC16792 to be used only

### **TYPICAL PERFORMANCE**

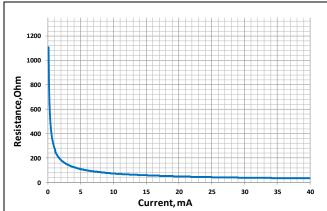

PHOTOCELL RESISTANCE vs. LED CURRENT

REV 01-04-16