



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ARM CORTEX[®]-M 32-BIT MICROCONTROLLER

NuMicro[®] Family NUC126 Series Datasheet

The information described in this document is the exclusive intellectual property of Nuvoton Technology Corporation and shall not be reproduced without permission from Nuvoton.

Nuvoton is providing this document only for reference purposes of NuMicro microcontroller based system design. Nuvoton assumes no responsibility for errors or omissions.

All data and specifications are subject to change without notice.

For additional information or questions, please contact: Nuvoton Technology Corporation.

www.nuvoton.com

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	8
1.1	Key Features Support Table	9
2	FEATURES	10
2.1	NuMicro® NUC126 Features	10
3	ABBREVIATIONS.....	18
3.1	Abbreviations.....	18
4	PARTS INFORMATION LIST AND PIN CONFIGURATION.....	20
4.1	NuMicro® NUC126 Selection Guide	20
4.1.1	NuMicro® NUC126 Naming Rule	20
4.1.2	NuMicro® NUC126 USB Series (M452 Compatible) Selection Guide.....	21
4.2	Pin Configuration	22
4.2.1	NuMicro® NUC126 USB Series LQFP48 Pin Diagram	22
4.2.2	NuMicro® NUC126 USB Series LQFP64 Pin Diagram	23
4.2.3	NuMicro® NUC126 USB Series LQFP100 Pin Diagram	24
4.3	Pin Description	25
4.3.1	NUC126 USB Series Pin Description	25
4.3.2	GPIO Multi-function Pin Summary.....	40
5	BLOCK DIAGRAM.....	52
5.1	NuMicro® NUC126 Block Diagram	52
6	FUNCTIONAL DESCRIPTION	53
6.1	ARM® Cortex®-M0 Core	53
6.2	System Manager	55
6.2.1	Overview	55
6.2.2	System Reset	55
6.2.3	Power Modes and Wake-up Sources	62
6.2.4	System Power Distribution	65
6.2.5	System Memory Map.....	67
6.2.6	SRAM Memory Organization	69
6.2.7	Register Lock	70
6.2.8	Auto Trim.....	70
6.2.9	UART1_TXD modulation with PWM.....	71
6.2.10	Voltage Detector (VDET).....	72
6.2.11	System Timer (SysTick)	73
6.2.12	Nested Vectored Interrupt Controller (NVIC)	74
6.3	Clock Controller.....	77
6.3.1	Overview	77
6.3.2	System Clock and SysTick Clock	80
6.3.3	Peripherals Clock	81
6.3.4	Power-down Mode Clock.....	82
6.3.5	Clock Output.....	82
6.4	Flash Memory Controller (FMC).....	84

6.4.1	Overview	84
6.4.2	Features	84
6.5	Analog Comparator Controller (ACMP)	85
6.5.1	Overview	85
6.5.2	Features	85
6.6	Analog-to-Digital Converter (ADC)	86
6.6.1	Overview	86
6.6.2	Features	86
6.7	CRC Controller (CRC)	87
6.7.1	Overview	87
6.7.2	Features	87
6.8	External Bus Interface (EBI)	88
6.8.1	Overview	88
6.8.2	Features	88
6.9	General Purpose I/O (GPIO)	89
6.9.1	Overview	89
6.9.2	Features	89
6.10	Hardware Divider (HDIV)	90
6.10.1	Overview	90
6.10.2	Features	90
6.10.3	Block Diagram	90
6.11	I ² C Serial Interface Controller (I ² C)	91
6.11.1	Overview	91
6.11.2	Features	91
6.12	PDMA Controller (PDMA)	92
6.12.1	Overview	92
6.12.2	Features	92
6.13	PWM Generator and Capture Timer (PWM)	93
6.13.1	Overview	93
6.13.2	Features	93
6.14	Real Time Clock (RTC)	95
6.14.1	Overview	95
6.14.2	Features	95
6.15	Smart Card Host Interface (SC)	96
6.15.1	Overview	96
6.15.2	Features	96
6.16	Serial Peripheral Interface (SPI)	97
6.16.1	Overview	97
6.16.2	Features	97
6.17	Timer Controller (TMR)	98
6.17.1	Overview	98
6.17.2	Features	98
6.18	USB Device Controller (USBD)	100
6.18.1	Overview	100

6.18.2	Features	100
6.19	USCI - Universal Serial Control Interface Controller	102
6.19.1	Overview	102
6.19.2	Features	102
6.20	USCI – UART Mode	103
6.20.1	Overview	103
6.20.2	Features	103
6.21	USCI - SPI Mode	104
6.21.1	Overview	104
6.21.2	Features	104
6.22	USCI - I ² C Mode	106
6.22.1	Overview	106
6.22.2	Features	106
6.23	UART Interface Controller (UART)	107
6.23.1	Overview	107
6.23.2	Features	107
6.24	Watchdog Timer (WDT)	108
6.24.1	Overview	108
6.24.2	Features	108
6.24.3	Clock Control	108
6.25	Window Watchdog Timer (WWDT)	109
6.25.1	Overview	109
6.25.2	Features	109
6.25.3	Clock Control	109
7	APPLICATION CIRCUIT	110
8	ELECTRICAL CHARACTERISTICS	111
8.1	Absolute Maximum Ratings	111
8.2	DC Electrical Characteristics	112
8.3	AC Electrical Characteristics	120
8.3.1	External 4~24 MHz High Speed Crystal (HXT) Input Clock	120
8.3.2	External 4~24 MHz High Speed Crystal (HXT) Oscillator	120
8.3.3	External 32.768 kHz Low Speed Crystal (LXT) Input Clock	121
8.3.4	External 32.768 kHz Low Speed Crystal (LXT) Input Clock	122
8.3.5	Internal 48 MHz High Speed RC Oscillator (HIRC48)	123
8.3.6	Internal 22.1184 MHz High Speed RC Oscillator (HIRC)	123
8.3.7	Internal 10 kHz Low Speed RC Oscillator (LIRC)	123
8.4	Analog Characteristics	125
8.4.1	LDO	125
8.4.2	Temperature Sensor	125
8.4.3	Internal Voltage Reference (Int_V _{REF})	125
8.4.4	Power-on Reset	126
8.4.5	Low-Voltage Reset	126
8.4.6	Brown-out Detector	126
8.4.7	12-bit ADC	127

8.4.8	Analog Comparator	129
8.4.9	USB PHY	130
8.5	Flash DC Electrical Characteris	131
8.6	I2C Dynamic Characteristics	132
8.7	SPI Dynamic Characteristics	133
8.7.1	Dynamic Characteristics of Data Input and Output Pin	133
9	PACKAGE DIMENSIONS	135
9.1	LQFP 100L (14x14x1.4 mm footprint 2.0 mm)	135
9.2	LQFP 64L (7x7x1.4 mm footprint 2.0 mm)	136
9.3	LQFP 48L (7x7x1.4mm2 Footprint 2.0mm)	137
10	REVISION HISTORY	138

LIST OF FIGURES

Figure 4.2-1 NuMicro [®] NUC126 USB Series LQFP 48-pin Diagram	22
Figure 4.2-2 NuMicro [®] NUC126 USB Series LQFP 64-pin Diagram	23
Figure 4.2-3 NuMicro [®] NUC126 USB Series LQFP 100-pin Diagram	24
Figure 5.1-1 NuMicro [®] NUC126 Block Diagram.....	52
Figure 6.1-1 Functional Block Diagram	53
Figure 6.2-1 System Reset Sources	56
Figure 6.2-2 nRESET Reset Waveform	58
Figure 6.2-3 Power-on Reset (POR) Waveform	59
Figure 6.2-4 Low Voltage Reset (LVR) Waveform	60
Figure 6.2-5 Brown-out Detector (BOD) Waveform	61
Figure 6.2-6 NuMicro [®] NUC126 Power Mode State Machine.....	63
Figure 6.2-7 NuMicro [®] NUC126 Power Distribution Diagram	66
Figure 6.2-8 SRAM Block Diagram	69
Figure 6.2-9 SRAM Memory Organization	70
Figure 6.2-10 UART1_TXD Modulated with PWM Channel	71
Figure 6.2-11 VDET Block Diagram	72
Figure 6.3-1 Clock Generator Block Diagram	78
Figure 6.3-2 Clock Generator Global View Diagram	79
Figure 6.3-3 System Clock Block Diagram.....	80
Figure 6.3-4 HXT Stop Protect Procedure	81
Figure 6.3-5 SysTick Clock Control Block Diagram	81
Figure 6.3-6 Clock Source of Clock Output.....	82
Figure 6.3-7 Clock Output Block Diagram.....	83
Figure 6.10-1 Hardware Divider Block Diagram.....	90
Figure 6.21-1 SPI Master Mode Application Block Diagram	104
Figure 6.21-2 SPI Slave Mode Application Block Diagram	104
Figure 6.22-1 I ² C Bus Timing	106
Figure 6.24-1 Watchdog Timer Clock Control.....	108
Figure 6.25-1 WWDT Clock Control.....	109
Figure 8.3-1 Typical Crystal Application Circuit	121
Figure 8.3-2 Typical Crystal Application Circuit	122
Figure 8.6-1 I ² C Timing Diagram.....	132
Figure 8.7-1 SPI Master Mode Timing Diagram.....	133
Figure 8.7-2 SPI Slave Mode Timing Diagram.....	134

List of Tables

Table 1.1-1 Key Features Support Table	9
Table 3.1-1 List of Abbreviations	19
Table 4.3-1 NUC126 GPIO Multi-function Table	51
Table 6.2-1 Reset Value of Registers	58
Table 6.2-2 Power Mode Difference Table.....	62
Table 6.2-3 Clocks in Power Modes.....	64
Table 6.2-4 Condition of Entering Power-down Mode Again	65
Table 6.2-5 Address Space Assignments for On-Chip Controllers	68
Table 6.2-6 Exception Model.....	75
Table 6.2-7 Interrupt Number Table	76
Table 6.3-8 Clock Stable Count Value Table	78

1 GENERAL DESCRIPTION

The NuMicro® NUC126 series microcontroller based on the ARM® Cortex®-M0 core operates at up to 72 MHz. With its crystal-less USB 2.0 FS interface, it is able to generate precise frequency required by USB protocol without the need of external crystal. It features adjustable V_{DDIO} pins for specific I/O pins with a wide range of voltage from 1.8V to 5.5V for various operating voltages of external components, a unique high-speed PWM with clock frequency up to 144 MHz for precision control, and an integrated hardware divider to speed up the calculation for the control algorithms. Apart from that, the NUC126 also integrates SPROM (Security Protection ROM) which provides a secure code execution area to protect the intelligent property of developers. The NUC126 series is ideal for industrial control, motor control and metering applications.

The NUC126 series supports the wide voltage range from 2.5V to 5.5V and temperature ranging from -40°C to 105°C, up to 256 Kbytes of Flash memory, 20 Kbytes of SRAM, 4 Kbytes of ISP (In-System Programming) ROM as well as ICP (In-Circuit Programming) ROM and IAP (In-Application Programming) ROM in 48-, 64- or 100-pin packages. It also supports high immunity of 8KV ESD (HBM)/4KV EFT. It is also equipped with plenty of peripherals such as USB interface, Timers, Watchdog Timers, RTC, PDMA, EBI, UART, Smart Card Interface, SPI, I²S, I²C, GPIO, up to 12 channels of 16-bit PWM, up to 20 channels of 12-bit ADC, analog comparator, temperature sensor, low voltage reset, brown-out detector, 96-bit UID (Unique Identification), and 128-bit UCID (Unique Customer Identification).

1.1 Key Feature and Application

Product Line	USB	USCI	UART	I ² C	SPI/I ² S	ISO 7816	PWM	EBI	PDMA	ADC	ACMP	RTC V _{BAT}	1.8V IO
NUC126	2.0 FS Device	3	3	2	2	2	12	Y	5	20	2	Y	Y

Table 1.1-1 Key Features Support Table

The NuMicro[®] NUC126 series is suitable for a wide range of applications such as:

- Industrial Automation
- PLCs
- Inverters
- Home Automation
- Security Alarm System
- Power Metering
- Portable Data Collector
- Portable RFID Reader
- System Supervisors
- Smart Card Reader
- Printer
- Bar Code Scanner
- Motor Control
- Digital Power

2 FEATURES

2.1 NuMicro® NUC126 Features

- Core
 - ARM® Cortex®-M0 core running up to 72 MHz
 - One 24-bit system timer
 - Supports low power sleep mode
 - Single-cycle 32-bit hardware multiplier
 - NVIC for the 32 interrupt inputs, each with 4-levels of priority
 - Supports programmable mask-able interrupts
 - Serial Wire Debug supports with 2 watch-points/4 breakpoints
- Built-in LDO for wide operating voltage ranged from 2.5V to 5.5V
- Flash Memory
 - Supports 256/128 KB application ROM (APROM)
 - Supports 4 KB Flash for loader (LDROM)
 - Supports 2 KB Security Protection Rom (SPROM)
 - Supports 12 bytes User Configuration block to control system initiation
 - Supports Data Flash with configurable memory size
 - Supports 2 KB page erase for all embedded flash
 - Supports In-System-Programming (ISP), In-Application-Programming (IAP) update embedded flash memory
 - Supports CRC-32 checksum calculation function
 - Supports flash all one verification function
 - Hardware external read protection of whole flash memory by Security Lock Bit
 - Supports 2-wired ICP update through SWD/ICE interface
- SRAM Memory
 - 20 KB embedded SRAM
 - Supports byte-, half-word- and word-access
 - Supports PDMA mode
- Hardware Divider
 - Signed (two's complement) integer calculation
 - 32-bit dividend with 16-bit divisor calculation capacity
 - 32-bit quotient and 32-bit remainder outputs (16-bit remainder with sign extends to 32-bit)
 - Divided by zero warning flag
 - 6 HCLK clocks taken for one cycle calculation
 - Write divisor to trigger calculation
 - Waiting for calculation ready automatically when reading quotient and remainder
- PDMA (Peripheral DMA)
 - Supports 5 independent configurable channels for automatic data transfer between memories and peripherals
 - Supports single and burst transfer type
 - Supports Normal and Scatter-Gather Transfer modes
 - Supports two types of priorities modes: Fixed-priority and Round-robin modes
 - Supports byte-, half-word- and word-access
 - Supports incrementing mode for the source and destination address for each channel
 - Supports time-out function for channel 0 and channel 1
 - Supports software and SPI/I2S, UART, USCI, USB, ADC, PWM and TIMER request
- Clock Control

- Built-in 22.1184 MHz high speed RC oscillator for system operation (Frequency variation < 2% at -40°C ~ +105°C)
- Built-in 48 MHz internal high speed RC oscillator for USB device operation(Frequency variation < 2% at -40°C ~ +105°C)

Built-in 10 kHz low speed RC oscillator for Watchdog Timer and Wake-up operation

Built-in 4~24 MHz high speed crystal oscillator for precise timing operation

Built-in 32.768 kHz low speed crystal oscillator for Real Time Clock

Supports PLL up to 144 MHz for high resolution PWM operation

Supports dynamically calibrating the HIRC48 to 48 MHz $\pm 0.25\%$ by external 32.768K crystal oscillator (LXT)

Supports dynamically calibrating the HIRC to 22.1184Mhz by external 32.768K crystal oscillator (LXT)

Supports clock on-the-fly switch

- Supports clock failure detection for system clock
- Supports auto clock switch once clock failure detected
- Supports exception (NMI) generated once a clock failure detected
- Supports divided clock output

●GPIO

Four I/O modes

TTL/Schmitt trigger input selectable

I/O pin configured as interrupt source with edge/level trigger setting

Supports high driver and high sink current I/O (up to 20 mA at 5V)

Supports software selectable slew rate control

Supports up to 81/49/35 GPIOs for LQFP100/64/48 respectively

●Timer/PWM

Supports 4 sets of Timers/PWM

Timer Mode	PWM Mode
TM_CNT_OUT	PWM_CH0
TM_EXT	PWM_CH1 (Complementary)

Timer Mode

- Supports 4 sets of 32-bit timers with 24-bit up-timer and one 8-bit pre-scale counter
- Independent clock source for each timer
- Provides one-shot, periodic, toggle and continuous counting operation modes
- Supports event counting function to count the event from external pin
- Supports input capture function to capture or reset counter value
- Supports chip wake-up from Idle/Power-down mode if a timer interrupt signal is generated
- Support Timer0 ~ Timer3 time-out interrupt signal or capture interrupt signal to trigger PWM, EADC and PDMA function
- Supports Inter-Timer trigger mode

PWM Mode

- Supports maximum clock frequency up to 50MHz
- Supports independent mode for 4 sets of independent PWM output channel
- Supports complementary mode for 4 sets of complementary paired PWM output channel with 12-bit Dead-time generator
- Supports 12-bit pre-scalar from 1 to 4096

- Supports 16-bit resolution PWM counter, each timer provides 1 PWM counter
- Supports up, down and up/down counter operation type
- Supports one-shot or Auto-reload counter operation mode
- Supports mask function and tri-state enable for each PWM pin
- Supports brake function
- Supports interrupt when PWM counter match zero, period value or compared value, and brake condition happened
- Supports trigger ADC when PWM counter match zero, period value or compared value
- Watchdog Timer
 - Supports multiple clock sources from LIRC(default selection), HCLK/2048 and LXT
 - 8 selectable time-out period from 1.6ms ~ 26.0sec (depending on clock source)
 - Able to wake up from Power-down or Idle mode
 - Interrupt or reset selectable on watchdog time-out
- Window Watchdog Timer
 - Supports multiple clock sources from HCLK/2048 (default selection) and LIRC
 - Window set by 6-bit counter with 11-bit prescale
 - Interrupt or reset selectable on time-out
- RTC
 - Supports separate battery power pin VBAT
 - Supports software compensation by setting frequency compensate register (FCR)
 - Supports RTC counter (second, minute, hour) and calendar counter (day, month, year)
 - Supports Alarm registers (second, minute, hour, day, month, year)
 - Supports Alarm mask registers
 - Selectable 12-hour or 24-hour mode
 - Automatic leap year recognition
 - Supports periodic time tick interrupt with 8 period options 1/128, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2 and 1 second
 - Supports wake-up function
- PWM
 - Supports maximum clock frequency up to 144MHz
 - Supports up to two PWM modules, each module provides 6 output channels.
 - Supports independent mode for PWM output/Capture input channel
 - Supports complementary mode for 2 complementary paired PWM output channel
 - Dead-time insertion with 12-bit resolution
 - Two compared values during one period
 - Supports 12-bit pre-scalar from 1 to 4096
 - Supports 16-bit resolution PWM counter
 - Up, down and up/down counter operation type
 - Supports mask function and tri-state enable for each PWM pin
 - Supports brake function
 - Brake source from pin and system safety events: clock failed, Brown-out detection and CPU lockup.
 - Noise filter for brake source from pin
 - Edge detect brake source to control brake state until brake interrupt cleared
 - Level detect brake source to auto recover function after brake condition removed
 - Supports interrupt on the following events:
 - PWM counter match zero, period value or compared value
 - Brake condition happened
 - Supports trigger ADC on the following events:

- PWM counter match zero, period value or compared value
- Supports up to 12 capture input channels with 16-bit resolution
- Supports rising or falling capture condition
- Supports input rising/falling capture interrupt
- Supports rising/falling capture with counter reload option

- USCI

Supports up to 3 sets of USCI

USCI	UART Mode	SPI Mode	I ² C Mode
USCI_CLK	-	SPI_CLK	SCL
USCI_CTL0	nCTS	SPI_SS	-
USCI_CTL1	nRTS	-	-
USCI_DAT0	Rx	SPI_MOSI	SDA
USCI_DAT1	Tx	SPI_MISO	-

UART Mode

- Supports one transmit buffer and two receive buffer for data payload
- Supports hardware auto flow control function
- Supports programmable baud-rate generator
- Support 9-Bit Data Transfer (Support 9-Bit RS-485)
- Baud rate detection possible by built-in capture event of baud rate generator
- Supports Wake-up function (Data and nCTS Wakeup Only)

SPI Mode

- Supports Master or Slave mode operation (the maximum frequency -- Master = fPCLK / 2, Slave = fPCLK / 5)
- Supports one transmit buffer and two receive buffers for data payload
- Configurable bit length of a transfer word from 4 to 16-bit
- Supports MSB first or LSB first transfer sequence
- Supports Word Suspend function
- Supports 3-wire, no slave select signal, bi-direction interface
- Supports wake-up function by slave select signal in Slave mode
- Supports one data channel half-duplex transfer

I²C Mode

- Full master and slave device capability
- Supports of 7-bit addressing, as well as 10-bit addressing
- Communication in standard mode (100 kBit/s) or in fast mode (up to 400 kBit/s)
- Supports multi-master bus
- Supports one transmit buffer and two receive buffer for data payload
- Supports 10-bit bus time-out capability
- Supports bus monitor mode.
- Supports Power down wake-up by data toggle or address match
- Supports setup/hold time programmable
- Supports multiple address recognition (two slave address with mask option)

- UART

Supports up to 3 sets of UART

Full-duplex asynchronous communications

Separates receive and transmit 16/16 bytes entry FIFO for data payloads

Supports hardware auto-flow control (RX, TX, CTS and RTS)

Programmable receiver buffer trigger level

Supports programmable baud rate generator for each channel individually

Supports 8-bit receiver buffer time-out detection function

Programmable transmitting data delay time between the last stop and the next start bit by setting DLY (UART_TOUT [15:8])

Supports Auto-Baud Rate measurement and baud rate compensation function
 Supports break error, frame error, parity error and receive/transmit buffer overflow detection function

Fully programmable serial-interface characteristics

- Programmable number of data bit, 5-, 6-, 7-, 8- bit character
- Programmable parity bit, even, odd, no parity or stick parity bit generation and detection
- Programmable stop bit, 1, 1.5, or 2 stop bit generation

Supports IrDA SIR function mode

- Supports for 3/16 bit duration for normal mode

Supports LIN function mode

- Supports LIN master/slave mode
- Supports programmable break generation function for transmitter
- Supports break detection function for receiver

Supports RS-485 mode

- Supports RS-485 9-bit mode
- Supports hardware or software enables to program nRTS pin to control RS-485 transmission direction

Supports nCTS, incoming data, Received Data FIFO reached threshold and RS-485 Address Match (AAD mode) wake-up function

- Supports PDMA transferSmart Card Host (SC)

Supports up to two Smart Card Hosts

SC Mode	UART Mode
SC_DATA	Rx
SC_CLK	Tx
SC_CD	-
SC_PWR	-
SC_RST	-

SC Mode

- Supports up to two ISO-7816-3 ports
- Compliant to ISO-7816-3 T=0, T=1
- Separate receive / transmit 4 bytes entry FIFO for data payloads
- Programmable transmission clock frequency
- Programmable receiver buffer trigger level
- Programmable guard time selection (11 ETU ~ 266 ETU)
- One 24-bit and two 8-bit time-out counters for Answer to Request (ATR) and waiting times processing
- Supports auto inverse convention function
- Supports transmitter and receiver error retry and error limit function
- Supports hardware activation sequence process
- Supports hardware warm reset sequence process
- Supports hardware deactivation sequence process
- Supports hardware auto deactivation sequence when detecting the card is removal

UART Mode

- Full duplex, asynchronous communications
- Supports receiving / transmitting 4-bytes FIFO
- Supports programmable baud rate generator for each channel
- Programmable even, odd or no parity bit generation and detection
- Programmable stop bit, 1 or 2 stop bit generation

- SPI/I²S

Supports up to two SPI/I²S controllers

SPI Mode	I ² S Mode
SPI_CLK	I2S_BCLK
SPI_SS	I2S_LRCLK
SPI_MOSI	I2S_DO
SPI_MISO	I2S_DI
-	I2S_MCLK

SPI Mode

- Supports Master or Slave mode operation
- Configurable bit length of a transfer word from 8 to 32-bit
- Provides separate 4-/8-level depth transmit and receive FIFO buffers
- Supports MSB first or LSB first transfer sequence
- Supports Byte Reorder function
- Supports PDMA transfer

I²S Mode

- Supports Master or Slave mode operation
- Capable of handling 8-, 16-, 24- and 32-bit word sizes in I2S mode
- Provides separate 4-level depth transmit and receive FIFO buffers in I2S mode
- Supports monaural and stereo audio data in I2S mode
- Supports PCM mode A, PCM mode B, I2S and MSB justified data format in I2S mode
- Supports PDMA transfer

● I²C

Supports up to two sets of I2C device

Supports Master/Slave mode

Supports bidirectional data transfer between masters and slaves

Supports multi-master bus (no central master)

Arbitration between simultaneously transmitting masters without corruption of serial data on the bus

Serial clock synchronization allows devices with different bit rates to communicate via one serial bus

Serial clock synchronization can be used as a handshake mechanism to suspend and resume serial transfer

Supports 14-bit time-out counter requesting the I2C interrupt if the I2C bus hangs up and timer-out counter overflows

Programmable clocks allow versatile rate control

Supports multiple address recognition, four slave address with mask option

Supports two-level buffer function

Supports setup/hold time programmable

Supports wake-up function

● USB 2.0 FS Device Controller

Crystal-less USB 2.0 FS Device

Compliant to USB specification version 2.0

On-chip USB Transceiver

- Supports Control, Bulk In/Out, Interrupt and Isochronous transfers
- Auto suspend function when no bus signaling for 3 ms
- Supports USB 2.0 Link Power Management (LPM)
- Provides 8 programmable endpoints
- Supports 512 Bytes internal SRAM as USB buffer
- Provides remote wake-up capability
- On-chip 5V to 3.3V LDO for USB PHY

● ADC

- Supports 12-bit SAR ADC
- 12-bit resolution and 10-bit accuracy is guaranteed
- Analog input voltage range: 0~ AV_{DD}
- Supports external VREF pin
- Up to 20 single-end analog input channels
- Maximum ADC peripheral clock frequency is 16 MHz
- Conversion rate up to 800K SPS at 5V
- Configurable ADC internal sampling time
- Supports single-scan, single-cycle-scan, and continuous scan and scan on enabled channels
- Supports individual conversion result register with valid and overrun indicators for each channel
- Supports digital comparator to monitor conversion result and user can select whether to generate an interrupt when conversion result matches the compare register setting
- An A/D conversion can be triggered by:
 - Software enable
 - External pin (STADC)
 - Timer 0~3 overflow pulse trigger
 - PWM triggers with optional start delay period
- Supports 4 internal channels for
 - Operational amplifier output
 - Band-gap VBG input
 - Temperature sensor input
 - VBAT voltage measure
- Supports internal reference voltage: 2.048V, 2.560V, 3.072V and 4.096V
- Supports PDMA transfer
- Analog Comparator
 - Supports up to 2 rail-to-rail analog comparators
 - Supports 4 multiplexed I/O pins at positive node.
 - Supports I/O pin and internal voltages at negative node
 - Support selectable internal voltage reference from:
 - Band-gap V_{BG}
 - Voltage divider source from AV_{DD} and internal reference voltage.
 - Supports programmable hysteresis
 - Supports programmable speed and power consumption
 - Interrupts generated when compare results change, interrupt event condition is programmable.
 - Supports power-down wake-up
 - Supports triggers for break events and cycle-by-cycle control for PWM
- Cyclic Redundancy Calculation Unit
 - Supports four common polynomials CRC-CCITT, CRC-8, CRC-16, and CRC-32
 - Programmable initial value
 - Supports programmable order reverse setting for input data and CRC checksum
 - Supports programmable 1's complement setting for input data and CRC checksum.
 - Supports 8/16/32-bit of data width
 - Interrupt generated once checksum error occurs
- User Configurable VDD1=1.8~5.5V IO Interface
 - Supports UART0, SPI0 and I2C0
- Supports 96-bit Unique ID (UID)
- Supports 128-bit Unique Customer ID (UCID)
- One built-in temperature sensor with 1°C resolution
- Brown-out detector

- With 8 levels: 4.3 V/ 3.7V/ 2.7V/ 2.2V
- Supports Brown-out Interrupt and Reset option
- Low Voltage Reset
 - Threshold voltage levels: 2.0 V
- Power consumption

Chip power down current < 10 μ A with RAM data retention.
 V_{BAT} power domain operating current <1.5 μ A
- Operating Temperature: -40°C ~105°C
- Packages
 - All Green package (RoHS)

LQFP 100-pin
 LQFP 64-pin(7mmx7mm)
 LQFP 48-pin

3 ABBREVIATIONS

3.1 Abbreviations

Acronym	Description
ACMP	Analog Comparator Controller
ADC	Analog-to-Digital Converter
AES	Advanced Encryption Standard
APB	Advanced Peripheral Bus
AHB	Advanced High-Performance Bus
BOD	Brown-out Detection
DAP	Debug Access Port
DES	Data Encryption Standard
EBI	External Bus Interface
EPWM	Enhanced Pulse Width Modulation
FIFO	First In, First Out
FMC	Flash Memory Controller
FPU	Floating-point Unit
GPIO	General-Purpose Input/Output
HCLK	The Clock of Advanced High-Performance Bus
HIRC	22.1184 MHz Internal High Speed RC Oscillator
HXT	4~24 MHz External High Speed Crystal Oscillator
IAP	In Application Programming
ICP	In Circuit Programming
ISP	In System Programming
LDO	Low Dropout Regulator
LIN	Local Interconnect Network
LIRC	10 kHz internal low speed RC oscillator (LIRC)
MPU	Memory Protection Unit
NVIC	Nested Vectored Interrupt Controller
PCLK	The Clock of Advanced Peripheral Bus
PDMA	Peripheral Direct Memory Access
PLL	Phase-Locked Loop
PWM	Pulse Width Modulation
QEI	Quadrature Encoder Interface
SD	Secure Digital
SPI	Serial Peripheral Interface


SPS	Samples per Second
TDES	Triple Data Encryption Standard
TMR	Timer Controller
UART	Universal Asynchronous Receiver/Transmitter
UCID	Unique Customer ID
USB	Universal Serial Bus
WDT	Watchdog Timer
WWDT	Window Watchdog Timer

Table 3.1-1 List of Abbreviations

4 PARTS INFORMATION LIST AND PIN CONFIGURATION

4.1 NuMicro® NUC126 Selection Guide

4.1.1 NuMicro® NUC126 Naming Rule

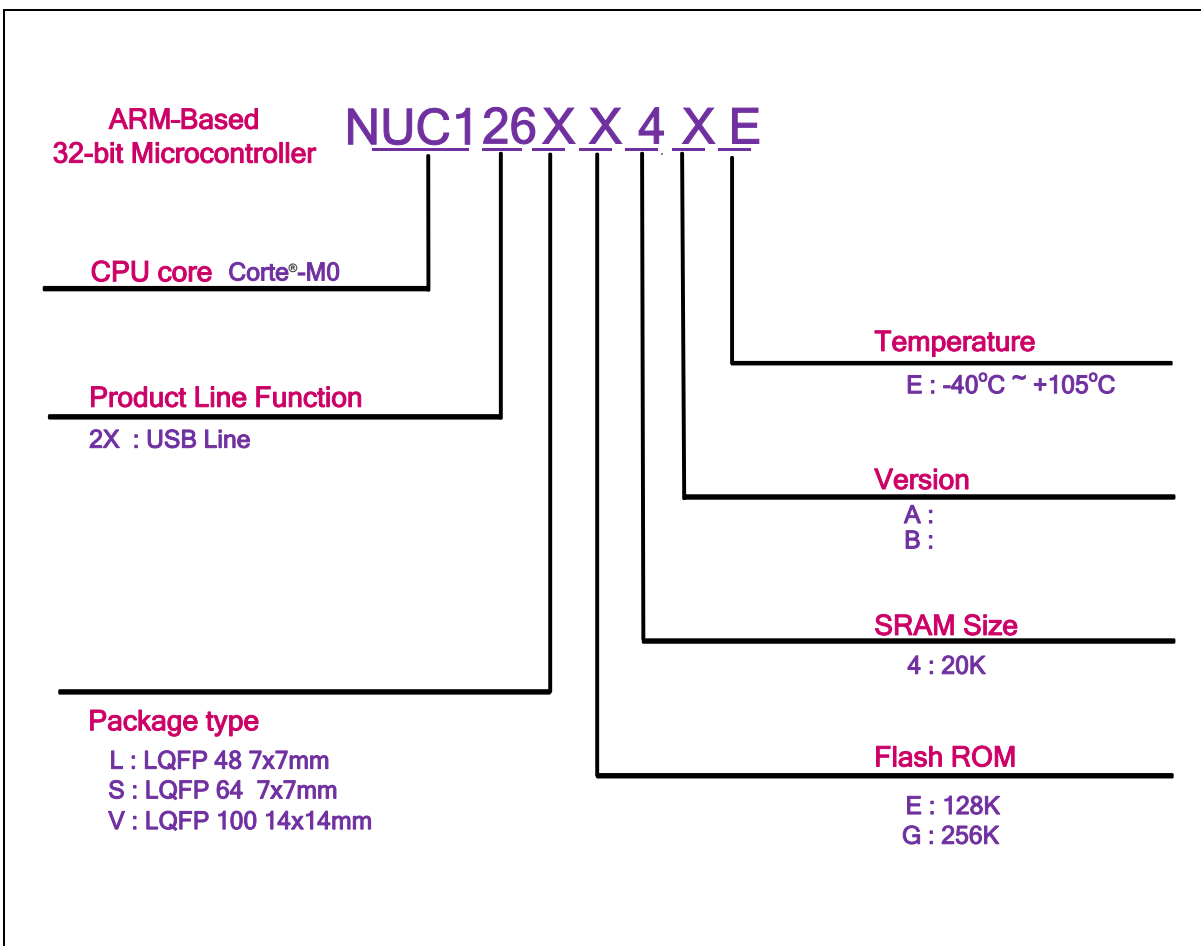

4.1.2 NuMicro® NUC126 USB Series (M452 Compatible) Selection Guide

Part Number	Flash (KB)	SRAM (KB)	Data Flash (KB)	SPROM (KB)	ISP ROM (KB)	I/O	Timer/PWM	PWM	Connectivity						ADC(12-Bit)	ACMP	PDMA	VBAT(RTC)	LVIO	EBI	ICP/API/ISP	Package
									USB	USCI*	UART	SC/UART	SPI/I ² S	I ² C								
NUC126LE4AE	128	20	Conf*	2	4	35	4	10	1	3	3	2	2	2	9-ch	2	5	--	√	√	√	LQFP 48
NUC126LG4AE	256	20	Conf*	2	4	35	4	10	1	3	3	2	2	2	9-ch	2	5	--	√	√	√	LQFP 48
NUC126SE4AE	128	20	Conf*	2	4	49	4	12	1	3	3	2	2	2	15-ch	2	5	√	√	√	√	LQFP 64*
NUC126SG4AE	256	20	Conf*	2	4	49	4	12	1	3	3	2	2	2	15-ch	2	5	√	√	√	√	LQFP 64*
NUC126VG4AE	256	20	Conf*	2	4	81	4	12	1	3	3	2	2	2	20-ch	2	5	√	√	√	√	LQFP 100

Conf*: Configurable

USCI*: support UART, SPI or I²C

LQFP64*: 7x7 mm

4.2 Pin Configuration

4.2.1 NuMicro® NUC126 USB Series LQFP48 Pin Diagram

Corresponding Part Number: NUC126LE4AE, NUC126LG4AE

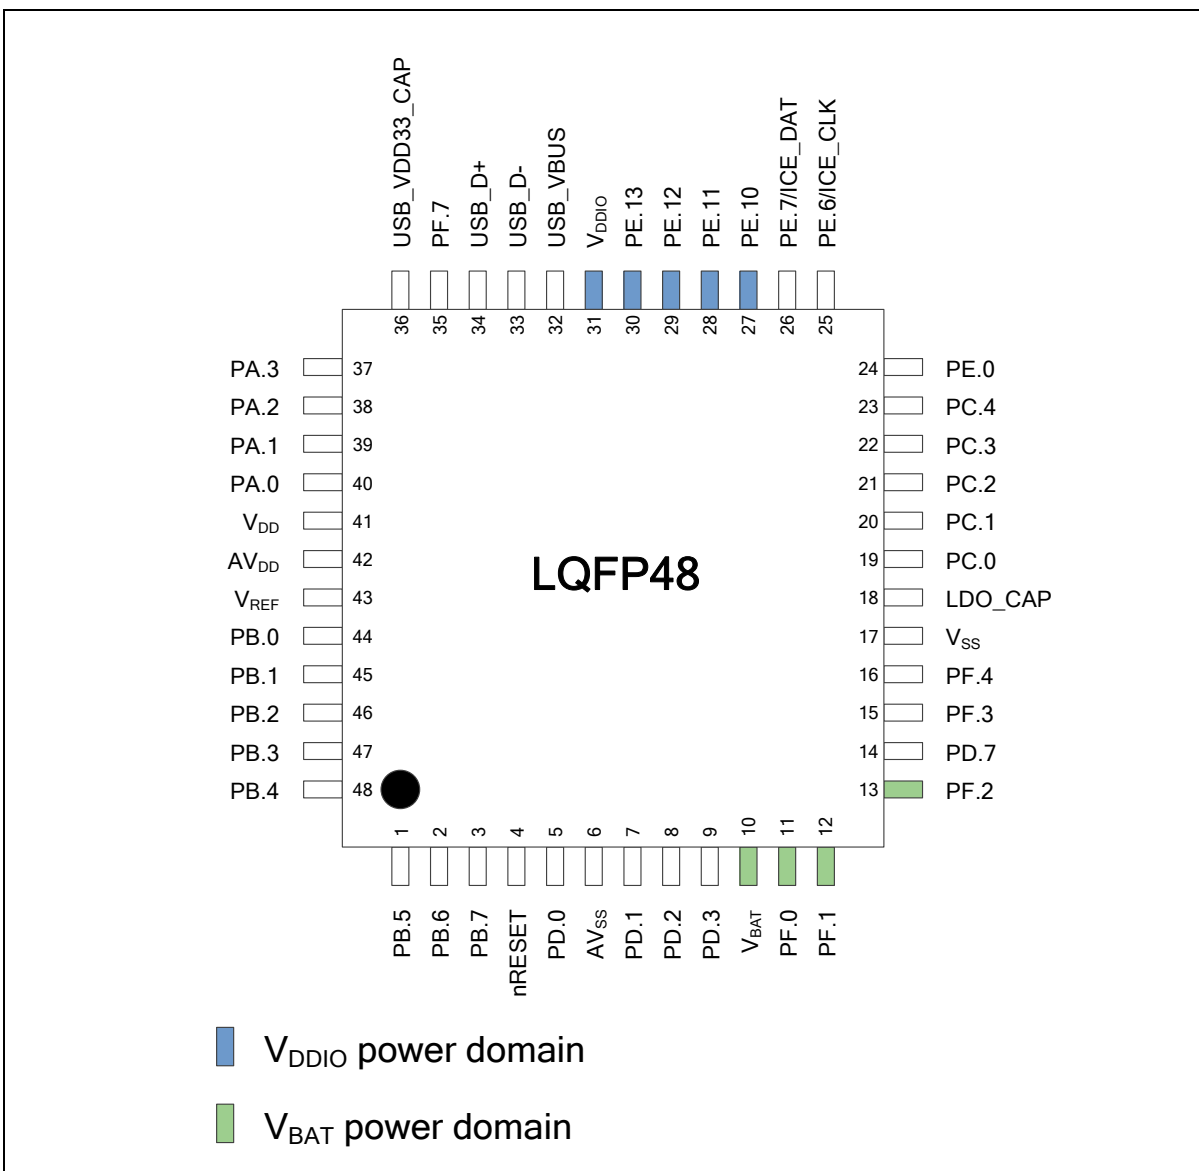


Figure 4.2-1 NuMicro® NUC126 USB Series LQFP 48-pin Diagram

4.2.2 NuMicro® NUC126 USB Series LQFP64 Pin Diagram

Corresponding Part Number: NUC126SE4AE, NUC126SG4AE

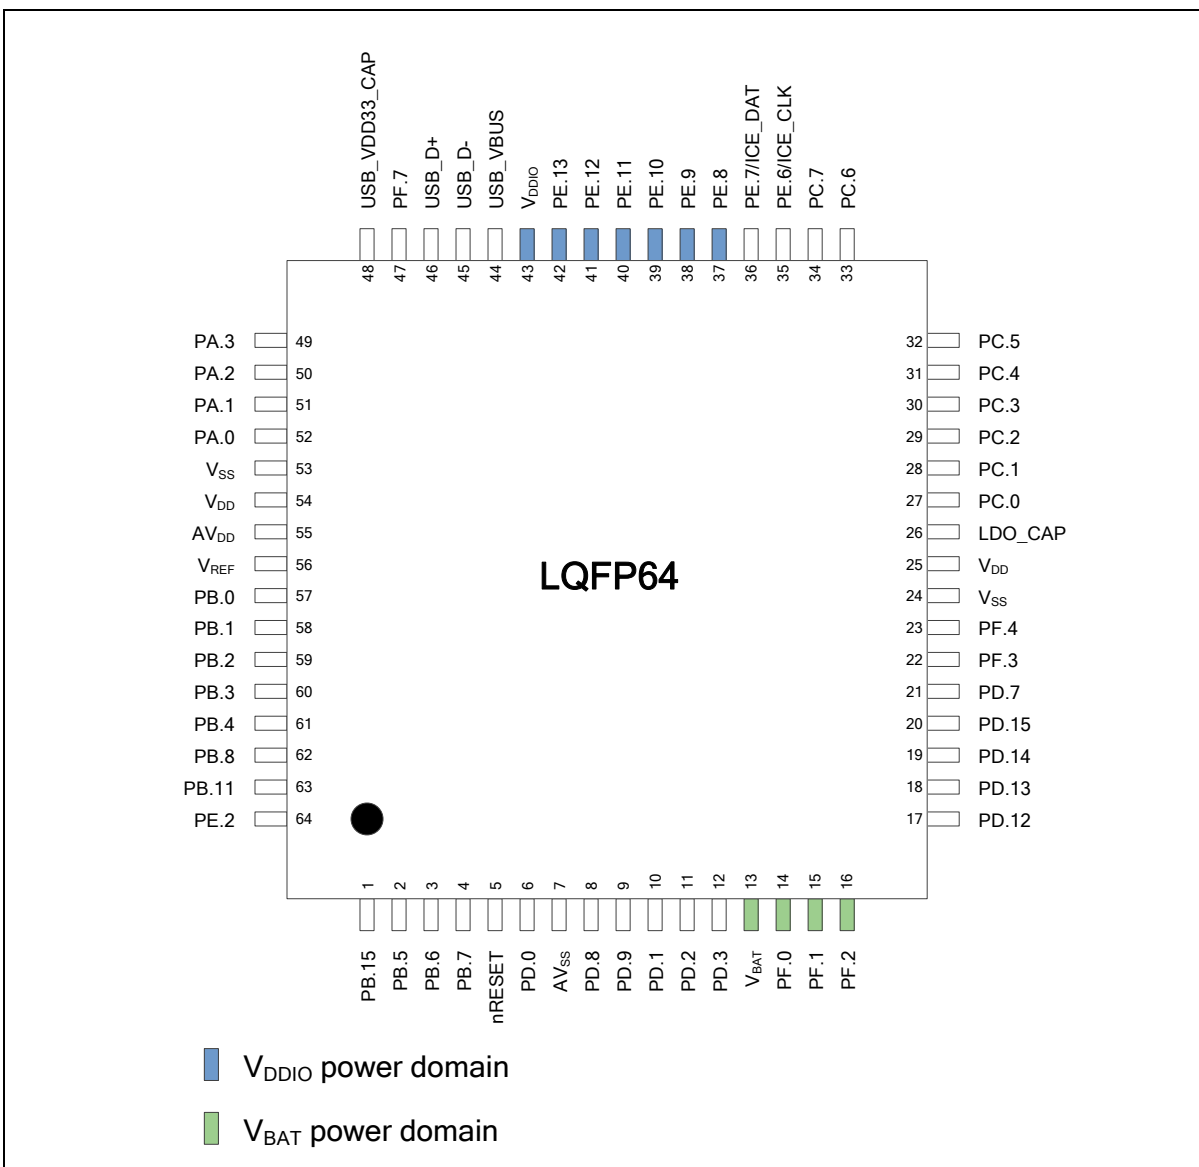


Figure 4.2-2 NuMicro® NUC126 USB Series LQFP 64-pin Diagram

4.2.3 NuMicro® NUC126 USB Series LQFP100 Pin Diagram

Corresponding Part Number: NUC126VG4AE

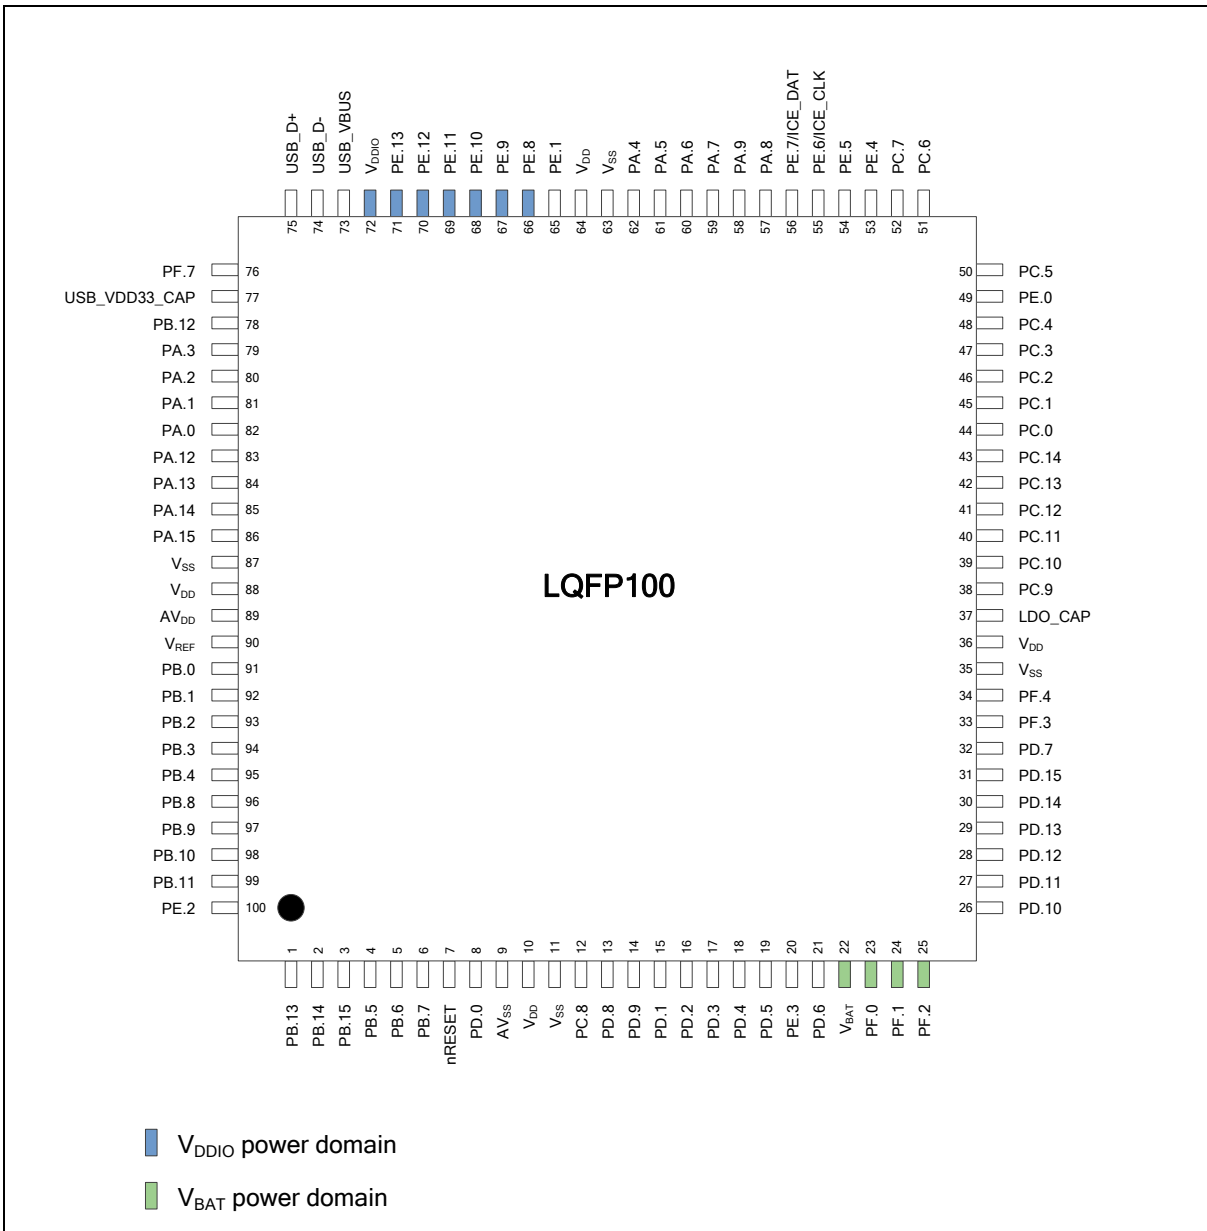


Figure 4.2-3 NuMicro® NUC126 USB Series LQFP 100-pin Diagram

4.3 Pin Description

4.3.1 NUC126 USB Series Pin Description

MFP* = Multi-function pin. (Refer to section SYS_GP_x_MFPL and SYS_GP_x_MFPH)

PA.0 MFP0 means SYS_GP0_MFPL[3:0]=0x0.

PA.9 MFP5 means SYS_GP0_MFPH[7:4]=0x5.

48 Pin	64 Pin	100 Pin	Pin Name	Type	MFP*	Description
		1	PB.13	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH10	A	MFP1	ADC0 channel 10 analog input.
		2	PB.14	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH11	A	MFP1	ADC0 channel 11 analog input.
	1	3	PB.15	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH12	A	MFP1	ADC0 channel 12 analog input.
			ACMP0_P3	A	MFP5	Analog comparator 0 positive input 3 pin.
			EBI_nCS1	O	MFP7	EBI chip select 1 output pin.
1	2	4	PB.5	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH13	A	MFP1	ADC0 channel 13 analog input.
			SPI0_MOSI	I/O	MFP2	SPI0 MOSI (Master Out, Slave In) pin.
			SPI1_MOSI	I/O	MFP3	SPI1 MOSI (Master Out, Slave In) pin.
			ACMP0_P2	A	MFP5	Analog comparator 0 positive input 2 pin.
			SC1_RST	O	MFP6	Smart Card 1 reset pin.
			EBI_AD6	I/O	MFP7	EBI address/data bus bit 6.
			UART2_RXD	I	MFP9	UART2 data receiver input pin.
2	3	5	PB.6	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH14	A	MFP1	ADC0 channel 14 analog input.
			SPI0_MISO	I/O	MFP2	SPI0 MISO (Master In, Slave Out) pin.
			SPI1_MISO	I/O	MFP3	SPI1 MISO (Master In, Slave Out) pin.
			ACMP0_P1	A	MFP5	Analog comparator 0 positive input 1 pin.
			SC1_PWR	O	MFP6	Smart Card 1 power pin.
			EBI_AD5	I/O	MFP7	EBI address/data bus bit 5.
3	4	6	PB.7	I/O	MFP0	General purpose digital I/O pin.
			ADC0_CH15	A	MFP1	ADC0 channel 15 analog input.
			SPI0_CLK	I/O	MFP2	SPI0 serial clock pin.
			SPI1_CLK	I/O	MFP3	SPI1 serial clock pin.
			USCI2_CTL1	I/O	MFP4	USCI2 control 1 pin.