



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## General Replacement Tube Output (8 Watt) Push-Pull *125J Series*

Audio



### Features

- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 10" long primary & secondary leads.
- Also see our **125H Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**

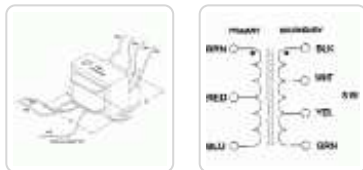

Part No.	Primary		Secondary		Weight (lbs.)	Overall Dimensions				Mounting Hole G
	Audio Watts	Impedance (Ohms)	Impedance (Ohms)	Primary Inductance		A	B	C	D	
<b>125J</b>	8	2.5K or 4K	6/8 or 3.2/4	5.60 H	1	3.25	1.50	1.94	2.81	0.19

### Hook Up Data

PRIMARY IMPEDANCE		SECONDARY IMPEDANCE (Ohms)	USE SECONDARY LEAD CONNECTIONS
Plate to Plate Brown to Blue (Ohms)			
4,000 C.T.	41857	WHT - GRN	
4,000 C.T.	3.2 / 4	WHT - YEL	
2,500 C.T.	41857	BLK - GRN	
2,500 C.T.	3.2 / 4	BLK - YEL	

*Data subject to change without notice*