



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



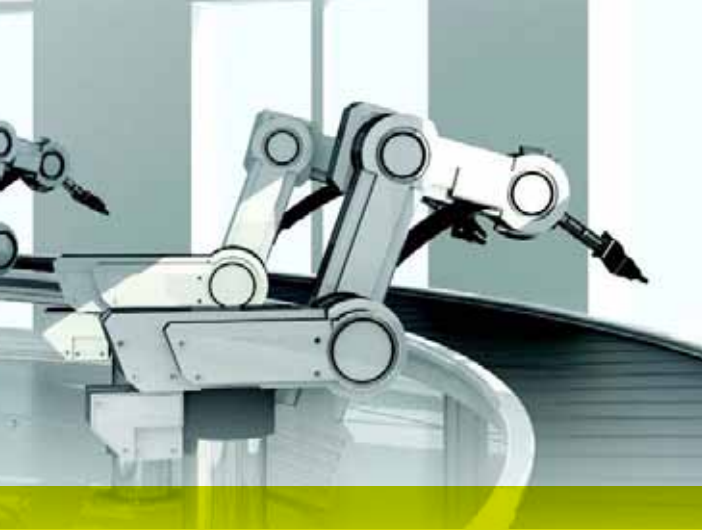

# NXP LPCXpresso Motor Control Kit

## Fast time-to-market for motor control

This universal platform, designed for the evaluation, development, and debugging of low-voltage motor-control applications, supports control of BLDC, BLAC, stepper, and dual-brushed DC motors.

### Key features

- ▶ Flexible microcontroller sockets
  - Socket for LPCXpresso LPC1114, LPC11C24, LPC1343, and LPC1769
  - Socket for LPC1100 Cortex-M0™ in PLCC44 package
  - Expansion connector LPC1800, LPC4000, LPC2900 and other NXP ARM™ microcontrollers
- ▶ Motor control
  - 300 W max output to motors
  - 4-phases (based on NXP PMSN2R6-40YS NMOSFET), accessed via screw terminals
  - 100% duty cycle supported
  - Voltage measurement (on three phases and virtual ground)
  - Current measurement (in-phase on three phases and common low-side)
  - Input current measurement including over-current trip
  - Break functionality
  - Hall & QEI sensor inputs connected via screw terminals
  - Temperature sensor
- ▶ Communication interfaces
  - USB, Ethernet, and CAN (if supported by MCU)
  - RS422/485 and UART-to-USB
- ▶ User interface
  - 5-key joystick switch
  - 96x64 pixel OLED

- ▶ Other
  - Reset push-button
  - Onboard 15 W power supply (+11, +5 or +3.3 V)
  - I<sup>2</sup>C EEPROM for user data
  - SWD/JTAG debugging connector
- ▶ Power supply input
  - 2.1 mm input jack, or via screw terminals
  - 12-30 V, 17 A max
- ▶ Board measures 200 x 150 mm

To support fast time-to-market for motor-control applications, NXP offers the low-cost LPCXpresso Motor Control Kit, a universal development platform created in partnership with Embedded Artists. It is an ideal way to prototype a motor-control project or simply explore motor-control functionality. It supports control of brushless DC (BLDC), brushless AC (BLAC), stepper, and dual-brushed DC motors.

The main board has two full H-bridges, so up to four phases can be controlled with up to 100% duty cycle. Phase voltage, as well as in-phase current can be measured on three phases, and virtual ground voltage and common low-side current can be





measured, too. For safety and protection, there is an input over-current trip protection. When the motor is generating power the actively controlled breaking circuitry becomes enabled, and above a certain bus voltage level the circuit breaks automatically. For design flexibility, there are several communications interfaces, including USB, Ethernet, CAN,

RS-422/485, and a UART-to-USB bridge. The board also has a small graphic user interface (96x64 pixel OLED) with a joystick, to allow for simple, intuitive human interaction.

The kit is available through NXP's distribution partners.

### The LPCXpresso Motor Control Kit



### Ordering information

Item no.	Name	Contents
OM13009	LPCXpresso Motor Control Kit	<ul style="list-style-type: none"><li>▶ LPCXpresso Motor Control Board</li><li>▶ LPCXpresso LPC1114 board with LPC-Link</li><li>▶ LPCXpresso Eclipse-based IDE and GNU compiler</li><li>▶ BLDC motor with hall sensors</li><li>▶ 24 V power supply (60 W)</li></ul>