

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







PART NUMBER	ITEM (1)	ITEM (2)	ITEM (3)
	SHROUD BODY	INSULATOR	PIN
127-2711-601	KOVAR	GLASS,	KOVAR
	GOLD PL .00005 MIN OVER	CORNING 7070	GOLD PL .00005 MIN OVER
	NICKEL PL	OR EQUIVALENT	NICKEL PL

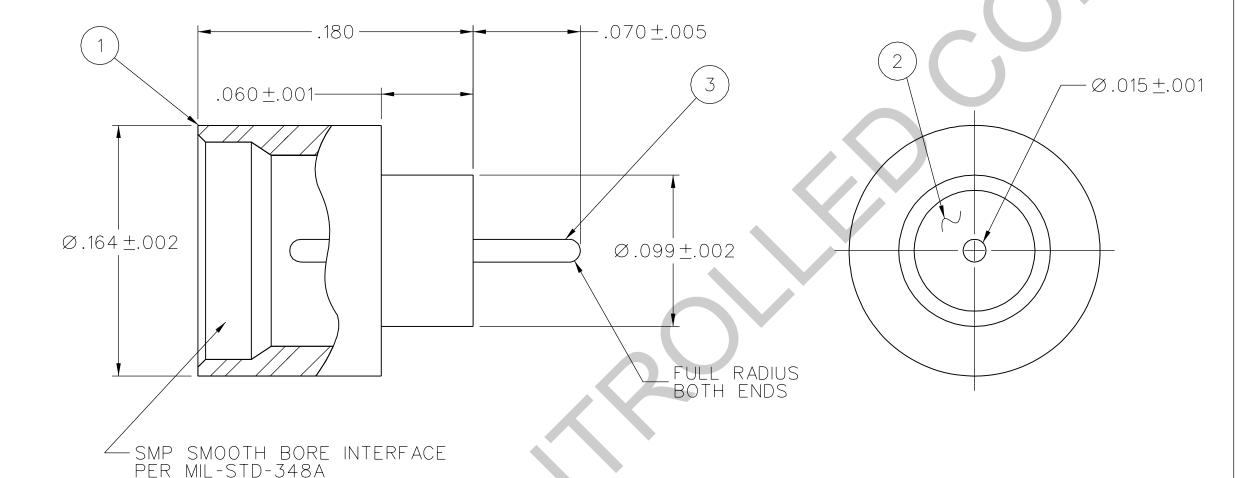

## CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"µSTATION"

## COMPANY CONFIDENTIAL

SMP SMOOTH BORE

**Cinch Connectivity Solutions** 

P.O. Box 1732 Waseca, MN 56093

1-800-247-8256

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY PAT	DATE 11-21-06	cin
DECIMALS .XX —— .XXX ±.003	mm ———	CHECKED BY JRK	DATE 1-18-07	CONNECTIVITY a bel group
MATL		APPROVED BY JCN	DATE 1-18-07	SMI STRAIGH HERMETIC

RELEASE DATE

U/M

INCH

FINISH

2 OF 2

1-18-07

15:1

SCALE

RAIGHT FEEDTHRU SHROUD HERMETIC SEALED PIN CONTACT

DRAWING NO. SHEET

DRAWING NO.

-127 - 2711 - 601/610

ENGINEERING RELEASE

1-4-07

REVISIONS

1-18-07

ECN 50862

 $\beta$  - 127-2711-601/610

## NOTES:

1. SPECIFICATIONS:

ELECRICAL:

IMPEDANCE: 50 OHMS NOMINAL FREQUENCY RANGE: DC TO 18 GHZ VSWR: DEPENDANT ON APPLICATION

ENVIRONMENTAL:

HERMETICITY: 1x10<sup>-8</sup> cc/sec AT ONE ATMOSPHERE SOLDERABILITY: MEETS REQUIREMENTS OF MIL-STD-202G, TEST METHOD 208H. OPERATING TEMPERATURE: -55 DEG C TO +165 DEG C