

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







### OPF694-2



#### **Features:**

- Low Cost 850 nm LED technology
- High thermal stability
- High optical coupling efficiency to multimode fiber
- Metal ST\* style receptacle
- Industrial temperature range



#### **Description:**

The OPF694-2 fiber optic transmitter is a high performance device packaged for data communication links. This transmitter is an 850 nm GaAlAs LED and is specifically designed to efficiently launch optical power into either  $50/125\mu m$  or  $62.5/125\mu m$  diameter multimode fiber. Two power ranges with upper and lower limits are offered which allows the designer to select a device best suited for the application.

### **Applications:**

- Industrial Ethernet equipment
- Copper-to-fiber media conversion
- Intra-system fiber optic links

Typical Coupled Power I <sub>F</sub> = 100mA, 25°C					
Fiber Size	Туре	N.A.	OPF694-2		
50/125 μm	Graded Index	0.20	-16dBm		
62.5/125 μm	Graded Index	0.28	-12dBm		
100/140 μm	Graded Index	0.29	-8dBm		
200/300 μm	Step Index	0.41	-2dBm		




ST<sup>®</sup> is a registered trademark of Fitel USA Corp..

OPF694-2




### **Mechanical Data**

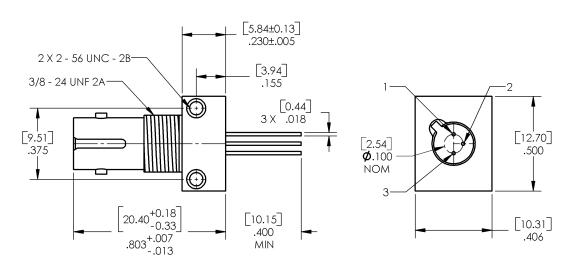

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

### Application Circuit: 155Mbps TTL Drive Circuit

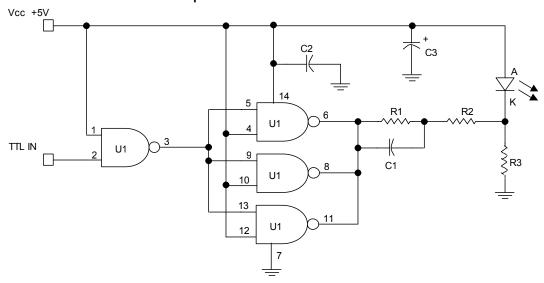

Part	Description	Value/ Type	Symbol	Tol.
C1	Capacitor	75	pF	20%
C2	Capacitor	100	pF	20%
C3	Capacitor	10	μF	20%
R1	Resistor	33	Ω	5%
R2	Resistor	33	Ω	5%
R3	Resistor	270	Ω	5%
U1	IC, Quad NAND	74ACTQ00	-	-

**OPF694-2** 



### **Electrical Specifications**

Absolute Maximum Ratings (T <sub>A</sub> = 25° C unless otherwise noted)			
Storage Temperature Range	-55° C to +100° C		
Operating Temperature Range	-40° C to +85° C		
Lead Soldering Temperature <sup>(1)</sup>	260° C		
Continuous Forward Current <sup>(2)</sup>	100 mA		
Maximum Reverse Voltage	1.0 V		

Electrical	Electrical Characteristics (T <sub>A</sub> = 25° C unless otherwise noted)							
SYMBOL	PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITIONS	
P <sub>T50</sub>	50/125 mm Fiber NA = 0.20	OPF694-2	-16.0		-11.0	dBm	I <sub>F</sub> = 100 mA	
V <sub>F</sub>	Forward Voltage		1.5		2.1	٧	I <sub>F</sub> = 100 mA	
V <sub>R</sub>	Reverse Voltage		1.8			V	Ι <sub>R</sub> = 100 μΑ	
λ	Wavelength		830	850	870	nm	I <sub>F</sub> = 50 mA	
Δλ	Optical Bandwidth			35		nm	I <sub>F</sub> = 50 mA	
t <sub>r</sub> ,t <sub>f</sub>	Rise and Fall Time			4.5	6.5	ns	I <sub>F</sub> = 100 mA; 10% to 90% <sup>(3)</sup>	

#### Notes:

- Maximum of 5 seconds with soldering iron. Duration can be extended to 10 seconds when flow soldering. RMA flux is recommended.
- 2. De-rate linearly at 1.0mA /°C above 25°C.
- 3. No Pre-bias.
- 4. All Optek fiber optic LED products are subjected to 100% burn-in as part of its quality control process. The burn-in conditions are 96 hours at 100mA drive current and 25°C ambient temperature.


Issue A 08/2016 Page 3

OPF694-2



### **Performance**

# Relative Coupled Power vs. Forward Current

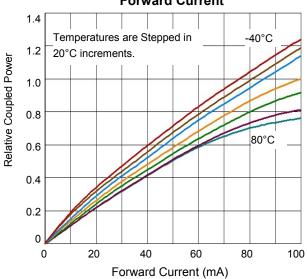

## Typical Forward Voltage vs. Forward Current

