imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Class II 100W LED Controlgear : PA-1101-48 Series

Product Features

- Universal AC Input
- High Power Factor
- · Low Total Harmonic Distortion
- · Short Circuit / Open Circuit / Over Voltage / Over Temperature Protections · Suitable for Dry & Damp Location
- · Adjustable Output Current by Dimming Input
- · RoHS Compliant

AC Input / DC Output EMC AC Input Voltage 100 ~ 305Vac (110 ~ 277Vac) EMI FCC Class A · AC Input Frequency · Harmonic Current Emissions EN61000-3-2 47 ~ 63Hz (50~60Hz) · Voltage Fluctuations & Flicker EN61000-3-3 · Max. Input Current @ 110Vac (60Hz) 1.4A • Electrostatic Discharge (ESD) • Min. PF @ 230Vac (50Hz) / 95V Output EN61000-4-2 0.95 • Min. PF @ 230Vac (50Hz) / Output ≧66.5V(70%) 0.92 ±4KV (Contact),±8KV (Air) Min. PF @ 277Vac (60Hz) / Output ≥55W 0.9 · RS Immunity Test EN61000-4-3 80MHz ~ 1GHz, 3V/m, 80% AM (1KHz) • Max. THD @ 120~277Vac / Output at 55W ~ 100W 20% EN61000-4-4 · Min. Eff. @ 220Vac / 95V Output 88% · Electrical Fast Transient ±1KV for AC power line, ±0.5KV for DC / signal line Turn On Delay Time <1.5 seconds DC Output Current 1050mA Lighting Surge EN61000-4-5 ±4KV (Com.), ±4KV (Dif.) · Line Regulation +3% · Load Regulation ±5% CS Immunity Test EN61000-4-6 0.15MHz ~ 80MHZ, 3V, 80% AM (1KHz) $52 \sim 95V$ DC Output Voltage Range · Voltage Dips & Short Interruptions EN61000-4-11 · Ripple Current at 220Vac & 95V Output +20% 30%, 25 cycles voltage reduction · DC Output Isolation ves

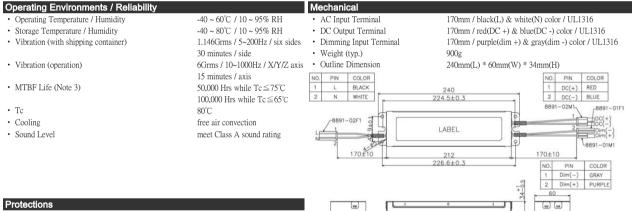

- · OVP or Open Circuit
- SCP

Safety / Certifications

· Hi Pot (AC I/P to Case)

• Hi Pot (AC I/P to O/P)

• Insulation (AC I/P to O/P)

· Complied with UL8750, 1st Edition

· Complied with UL60950-1, 2nd Edition

- OTF

auto recoverv output power decrease

constant voltage, 117V max

3750Vac / 10mA / 60Sec.

3750Vac / 10mA / 60Sec.

 $>20M\Omega$, 500Vdc

Dimming Input

- · Support 2 in 1 Dimming Function Resistor Dimming Range (10~100K)
- Voltage Dimming Range (1~10V)
- · Resistor Dimming Reference Table

- Resision Dimining Reference Table		
Resistor Dimming	63.4KΩ ±1%	48.7KΩ ±1%
Output Current	700mA	540mA
Tolerance	±10%	±10%
 Voltage Dimming Reference Table 		
Voltage Dimming	6.6V	5V
Output Current	700mA	530mA
Tolerance	±10%	±10%

100%, 0.5 cycles voltage reduction

Notes :

(1) above definition is based on 25°C ambient if not specified

· Complied with CAN/CSA-C22.2 No.60950-1-07,2nd Edition

(2) this LED driver is designed and intended for operating with LED load only

(3) MTBF evaluation is based on SR-332 method, 115Vac/60Hz, max load

(4) to measure efficiency after burn-in 30 minutes with full output load

(5) recommend to install the controlgear inside the enclosure