



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com





Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






High Frequency Wire Wound Transformers

EP10 Platforms - SMT



-  **Power Range:** up to 30W
-  **Height:** 11.45mm Max
-  **Footprint:** 15.24mm x 13.1mm Max
-  **Topology:** Forward and Flyback

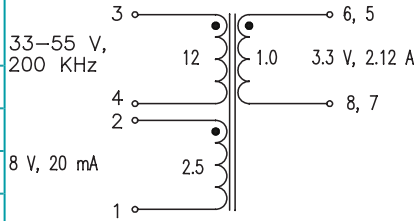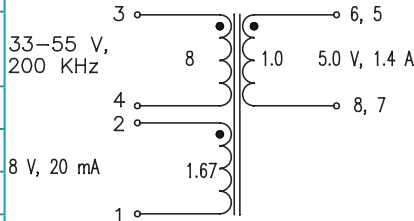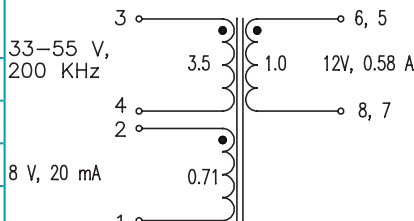Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ⁵					
PA1133NL	Pri. Inductance	(3-4)	253.4µH ± 10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p>	<p>6, 5 3.3 V, 2.12 A 8, 7</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX		
	DCR	(3-4)	420mΩ MAX		
		(6, 5-8, 7)	7.5mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms		
	K1 Factor	4671.8			
PA1134NL	Pri. Inductance	(3-4)	253.4µH ±10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p>	<p>6, 5 5.0 V, 1.4 A 8, 7</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	7.5µH MAX		
	DCR	(3-4)	420mΩ MAX		
		(6, 5-8, 7)	16mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms		
	K1 Factor	4671.8			
PA1135NL	Pri. Inductance	(3-4)	264.1µH ±10%	 <p>33-55 V, 200 KHz 8 V, 20 mA</p>	<p>6, 5 12V, 0.58 A 8, 7</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	6 µH MAX		
	DCR	(3-4)	800mΩ MAX		
		(6, 5-8, 7)	45mΩ MAX		
	Hi-Pot	Pri-Sec	1500Vrms		
	K1 Factor	4769.7			

High Frequency Wire Wound Transformers

EP10 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part Number	Parameter	Configuration	Value	Notes
PA1253NL	Pri. Inductance	(3-4)	253.4 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	12 μ H MAX	
	DCR	(3-4)	420 m Ω MAX	
		(2-1)	335 m Ω MAX	
		(5-6)	9.5 m Ω MAX	
		(7-8)	7.2 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
KI Factor		4671.8		
PA1277NL	Pri. Inductance	(3-4)	20.4 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (10, 9, 8, 7) shorted	1.5 μ H MAX	
	DCR	(3-4)	80 m Ω MAX	
		(6, 5-8, 7)	7.5 m Ω MAX	
		(2-1)	150 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
KI Factor		1002.9		
PA1282NL	Pri. Inductance	(3-4)	155 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	530 m Ω MAX	
		(6, 5-8, 7)	31 m Ω MAX	
		(2-1)	900 m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
KI Factor		3117.5		
PA1283NL	Pri. Inductance	(3-4)	155 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	570 m Ω MAX	
		(6, 5-8, 7)	40 m Ω MAX	
		(2-1)	1000 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		3117.5		

High Frequency Wire Wound Transformers

EP10 Platforms - SMT




Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part Number	Parameter	Configuration	Value	Notes
PA1284NL	Pri. Inductance	(3-4)	155 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	5 μ H MAX	
	DCR	(3-4)	540 m Ω MAX	
		(6, 5-8, 7)	370 m Ω MAX	
		(2-1)	920 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		3117.5		
PA1370NL	Pri. Inductance	(3-4)	20.4 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8,5) shorted	1.5 μ H MAX	
	DCR	(3-4)	80 m Ω MAX	
		(5-8)	30 m Ω MAX	
		(2-1)	105 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		1002.9		
PA1721NL	Pri. Inductance	(3-4)	185 μ H \pm 10%	<p>FORWARD TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	10 μ H MAX	
	DCR	(3-4)	420 m Ω MAX	
		(6, 5-8, 7)	12 m Ω MAX	
		(2-1)	115 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		3410.8		
PA2362NL	Pri. Inductance	(3-4)	25.2 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.55 μ H MAX	
	DCR	(3-4)	135 m Ω MAX	
		(6, 5-8, 7)	11 m Ω MAX	
		(2-1)	115 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
KI Factor		1115.0		

High Frequency Wire Wound Transformers

EP10 Platforms - SMT

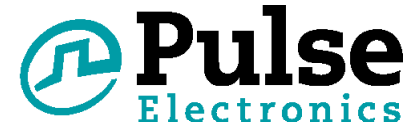

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ²				
PA2363NL	Pri. Inductance	(3-4)	25.2 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	0.85 μ H MAX	
	DCR	(3-4)	135 m Ω MAX	
		(6, 5-8, 7)	9 m Ω MAX	
		(2-1)	180 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	1115.0			
PA2364NL	Pri. Inductance	(3-4)	25.2 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (1, 2, 8, 7, 6, 5) shorted	1 μ H MAX	
	DCR	(3-4)	145 m Ω MAX	
		(6, 5-8, 7)	7.5 m Ω MAX	
		(2-1)	110 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	1059.4			
PA2454NL	Pri. Inductance	(3-4)	24 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	0.75 μ H MAX	
	DCR	(3-4)	82 m Ω MAX	
		(6, 5-8, 7)	13 m Ω MAX	
		(2-1)	80 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor	1179.9			
PA2455NL	Pri. Inductance	(3-4)	24 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(1-4) with (8, 7, 6, 5) shorted	0.6 μ H MAX	
	DCR	(3-4)	90 m Ω MAX	
		(6, 5-8, 7)	23 m Ω MAX	
		(2-1)	130 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vdc	
KI Factor	1179.9			

High Frequency Wire Wound Transformers


EP10 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C				
PA2456NL	Pri. Inductance	(3-4)	24 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3,4) with (8, 7, 6, 5) shorted	0.6 μ H MAX	
	DCR	(3-4)	86 m Ω MAX	
		(6, 5-8, 7)	86 m Ω MAX	
	Hi-Pot	(2-1)	470 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		1179.9		
PA2627NL	Pri. Inductance	(3-4)	50.5 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
	Lk. Inductance	(3-4) with (8, 7, 6, 5) shorted	1.4 μ H MAX	
	DCR	(3-4)	420 m Ω MAX	
		(6, 5-8, 7)	47 m Ω MAX	
	Hi-Pot	(2-1)	174 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
KI Factor		1241.4		
PA3948.001NL	Pri. Inductance	(4-1) with 3,2 shorted	40 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
		(4-1) with 3,2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 μ H MAX	
	DCR	(3-4)	410 m Ω MAX	
		(6, 5-8, 7))	140 m Ω MAX	
	Hi-Pot	(2-1)	140 m Ω MAX	
Hi-Pot	Pri-Sec	1500 Vdc		
KI Factor		1241.4		
PA3948.002NL	Pri. Inductance	(4-1) with 3,2 shorted	40 μ H \pm 10%	<p>FLYBACK TRANSFORMER</p>
		(4-1) with 3.2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 μ H MAX	
	DCR	(4-1)	405 m Ω MAX	
		(8-6)	470 m Ω MAX	
	Hi-Pot	(7-5)	470 m Ω MAX	
Hi-Pot	Pri-Sec	1500 Vdc		
KI Factor		983.3		

High Frequency Wire Wound Transformers

EP10 Platforms - SMT

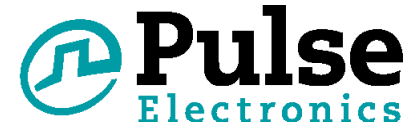

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ²				
PA3948.003NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 μ H \pm 10%	
		(4-1) with 3, 2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 μ H MAX	
	DCR	(4-1)	405 m Ω MAX	
		(8-6)	470 m Ω MAX	
	(7-5)	470 m Ω MAX		
Hi-Pot	Pri-Sec	1500 Vrms		
K1 Factor	983.3			
FLYBACK TRANSFORMER				
PA3948.004NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 μ H \pm 10%	
		(4-1) with 3, 2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.45 μ H MAX	
	DCR	(4-1)	220 m Ω MAX	
		(8-6)	58 m Ω MAX	
	(7-5)	58 m Ω MAX		
Hi-Pot	Pri-Sec	1500 Vrms		
K1 Factor	983.3			
FLYBACK TRANSFORMER				
PA3948.005NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 μ H \pm 10%	
		(4-1) with 3, 2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.6 μ H MAX	
	DCR	(4-1)	220 m Ω MAX	
		(7-6)	1275 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	983.3			
FLYBACK TRANSFORMER				
PA3948.006NL	Pri. Inductance	(4-1) with 3, 2 shorted	40 μ H \pm 10%	
		(4-1) with 3, 2 shorted	32 μ H Min at 1.88A	
	Lk. Inductance	(4-1) with (5, 6, 7, 8) shorted	1.65 μ H MAX	
	DCR	(4-1)	220 m Ω MAX	
		(7-6)	3350 m Ω MAX	
	Hi-Pot	Pri-Sec	1500 Vrms	
K1 Factor	983.3			
FLYBACK TRANSFORMER				

High Frequency Wire Wound Transformers

EP10 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$

4. In high volt-sec applications, it is important to calculate the core loss of the transformer.

Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:


For Flyback Topology: $\Delta B = K1_Factor * (A)$

For Forward Topology: $\Delta B = K1_Factor * Volt-\mu sec$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1133NL becomes PA1133NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) an depth (Ko=11.6mm).

Mechanical

PAXXXXNL

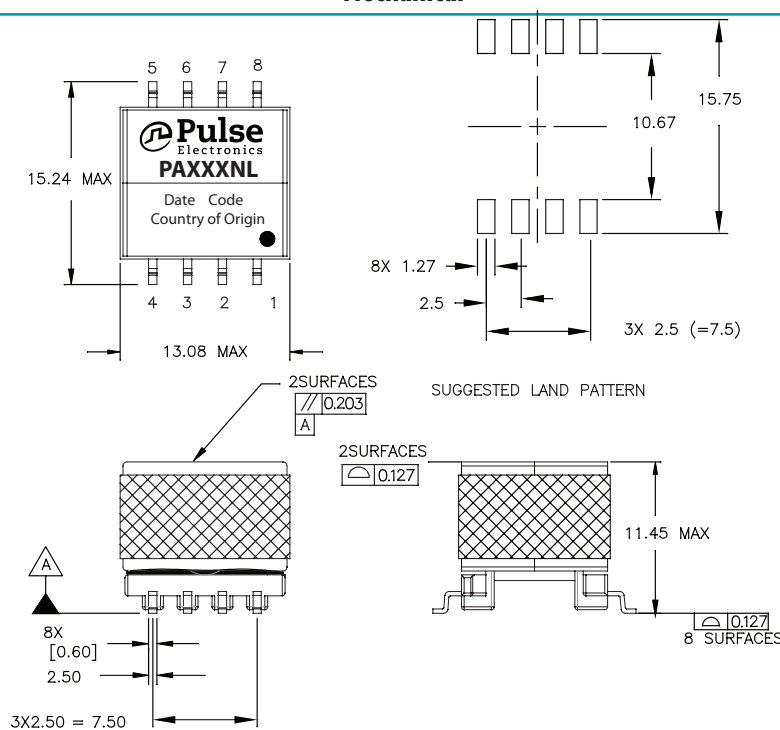

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejian Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Tel: 65 6287 8998
Fax: 65 6287 8998

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2016. Pulse Electronics, Inc. All rights reserved.