



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PA280-44(Z) Data Sheet


44 pin PLCC socket/40 pin DIP 0.6" plug

## Supported Device/Footprints

This adapter allows programming of several PLCC, CLCC, and LCC devices in their DIP footprint. The following is a partial list:


Mfgr	Device	Package	Footprint	
			Programmer	Socket
Intel	27C210	PLCC,	Many	40 pin DIP
	27C220	CLCC		
	27C240			
Several	27C1024	PLCC,	Many	40 pin DIP
	27C2048	CLCC		
	27C4096			

## Adapter Dimensions

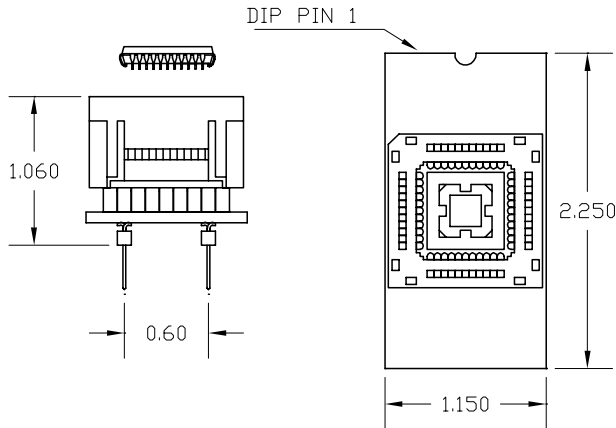

Press rim to open socket, Press device to close

PA280-44

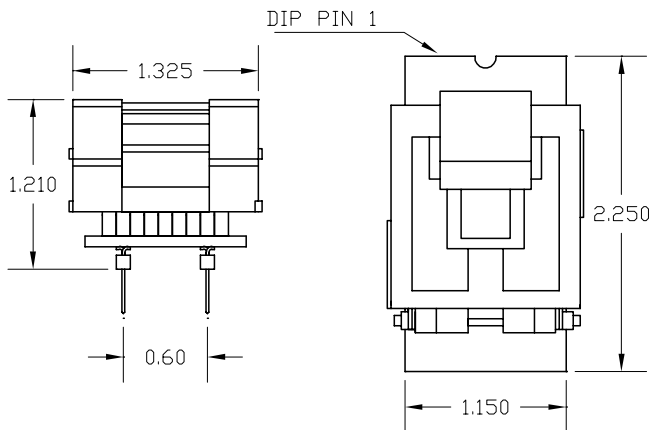

Press rim to open socket, Press device to close

PA280-44Z

## Adapter Parts & Part Numbers

The following chart shows the various socket and board part numbers that make up these adapters.

Adapter	Socket Type	Test Socket	Circuit Board
PA280-44	Auto Eject	44-306	PA280-PD
PA280-44Z	Lidded ZIF	44-400	PA280-PZD

## Adapter Construction

The adapter is made up of 2 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced when they wear out.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

## Test Socket

LSC #	Mfgr/Part Number
44-306	Yamaichi IC120-0444-306
44-400	Yamaichi IC51-0444-400

## Adapter Wiring

The following chart shows the connections from the PLCC device to the adapter's DIP plug.

DEVICE	PLUG	PLUG	DEVICE
1	NC	40	44
2	1	39	43
3	2	38	42
4	3	37	41
5	4	36	40
6	5	35	39
7	6	34	38
8	7	33	37
9	8	32	36
10	9	31	35
11	10	30	34
12	11	NC	33
13	NC	29	32
14	12	28	31
15	13	27	30
16	14	26	29
17	15	25	28
18	16	24	27
19	17	23	26
20	18	22	25
21	19	21	24
22	20	NC	23

Skip PLCC pins 1, 13, 23, 33



Logical Systems Corporation  
 PO Box 6184, Syracuse, NY 13217-6184 USA  
 Tel (315) 478-0722, FAX (315) 479-6753  
 www.logicals.com, Email: info@logicals.com

PA280-44(Z) Data Sheet  
 Doc: 280-PD.DOC  
 Rev 09/08/99  
 Page 1 of 1