



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PC725V0NSZX/ PC725V0YSZX

■ Features

1. TTL compatible output
2. High collector-emitter voltage (V_{CE0} :300V)
3. High sensitivity (CTR:MIN. 1 000%)
4. Isolation voltage (Viso (rms):5kV)
5. Recognized by UL, file No.E64380
Approved by TÜV (VDE0884)(PC725V0YSZX)
6. 6-pin DIP package

■ Applications

1. Home appliances
2. Programmable controllers
3. Peripheral equipment of personal computers

■ Model Line-up

Model No.	* Safty Standard Approval		Package	Packing
	UL	TÜV (VDE0884)		
PC725V0NSZX	○	—	DIP	Sleeve
PC725V0YSZX	○	○		

* Application Model No. PC725V

■ Absolute Maximum Ratings

($T_a=25^{\circ}\text{C}$)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CE0}	300	V
	Collector-base voltage	V_{CBO}	300	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	150	mA
	Collector current (reverse)	$-I_C$	10	mA
	Collector power dissipation	P_C	300	mW
	Total power dissipation	P_{tot}	350	mW
	*2 Isolation voltage	V_{iso} (rms)	5	kV
Operating temperature	T_{opr}	-25 to +100	$^{\circ}\text{C}$	
Storage temperature	T_{stg}	-40 to +125	$^{\circ}\text{C}$	
*3 Soldering temperature	T_{sol}	260	$^{\circ}\text{C}$	

*1 Pulse width \leq 100 μ s, Duty ratio=0.001


*2 40 to 60%RH, AC for 1 min

*3 For 10 s

High Sensitivity and High Collector-emitter Voltage Type Photocoupler

■ Outline Dimensions

(Unit : mm)

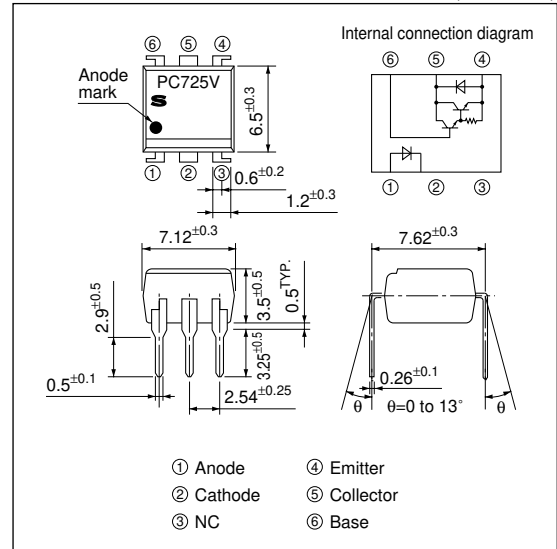

■ Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F=10\text{mA}$	-	1.2	1.4	V	
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$	-	-	3	V	
	Reverse current	I_R	$V_R=4\text{V}$	-	-	10	μA	
	Terminal capacitance	C_t	$V=0, f=1\text{kHz}$	-	30	250	pF	
Output	Collector dark current	I_{CEO}	$V_{CE}=200\text{V}, I_F=0, R_{BE}=\infty$	-	-	10^{-6}	A	
Transfer characteristics	Collector current	I_C	$I_F=1\text{mA}, V_{CE}=2\text{V}, R_{BE}=\infty$	10	40	150	mA	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20\text{mA}, I_C=100\text{mA}, R_{BE}=\infty$	-	-	1.2	V	
	Isolation resistance	R_{ISO}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	-	Ω	
	Floating capacitance	C_f	$V=0, f=1\text{MHz}$	-	0.6	1.0	pF	
	Cut-off frequency	f_c	$V_{CE}=2\text{V}, I_C=20\text{mA}, R_L=100\Omega, R_{BE}=\infty, -3\text{dB}$	1	7	-	kHz	
	Response time	Rise time	t_r	$V_{CE}=2\text{V}, I_C=20\text{mA}, R_L=100\Omega, R_{BE}=\infty$	-	100	300	μs
		Fall time	t_f		-	20	100	μs

Fig.1 Forward Current vs. Ambient Temperature

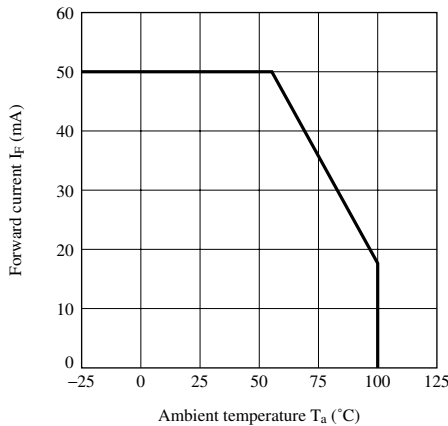


Fig.2 Collector Power Dissipation vs. Ambient Temperature

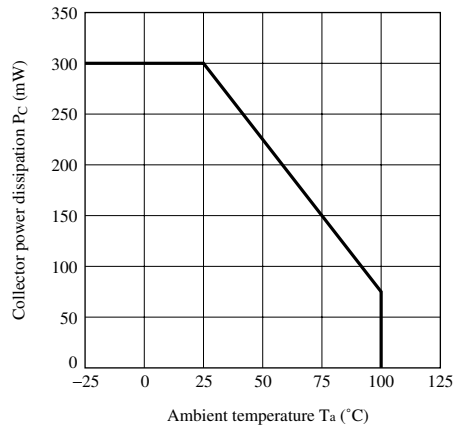


Fig.3 Peak Forward Current vs. Duty Ratio

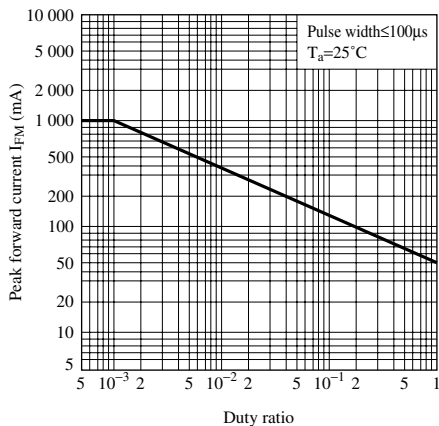


Fig.4 Forward Current vs. Forward Voltage

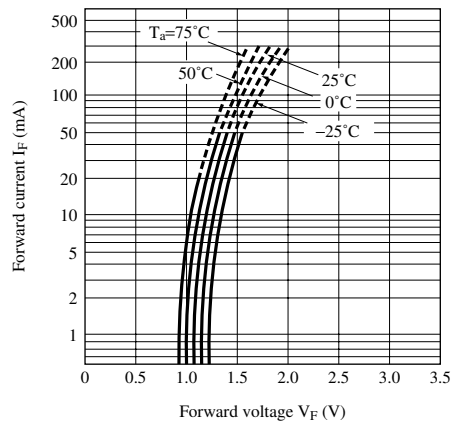


Fig.5 Current Transfer Ratio vs. Forward Current

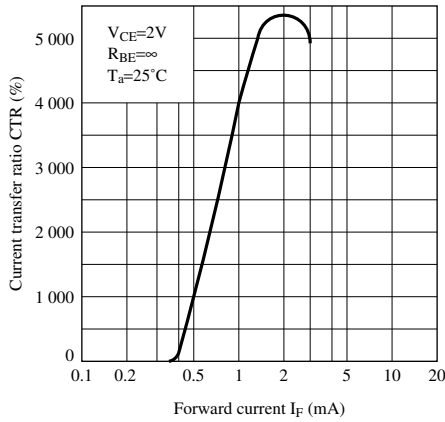


Fig.6 Collector Current vs. Collector-emitter Voltage

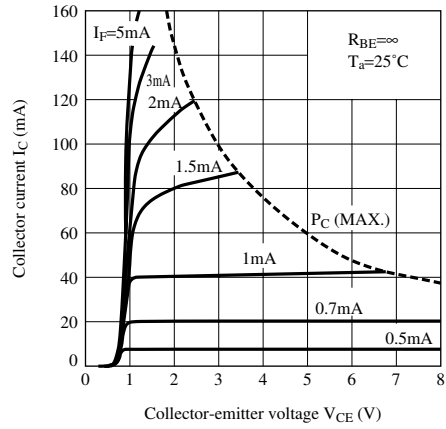


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

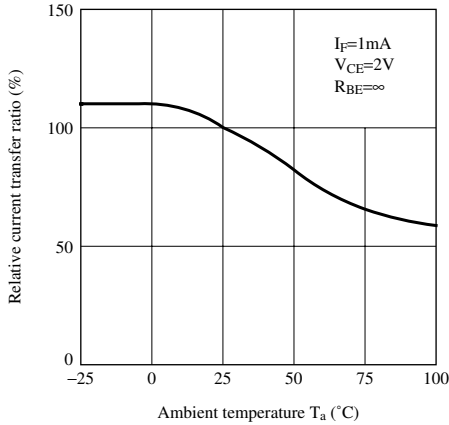


Fig.8 Collector - emitter Saturation Voltage vs. Ambient Temperature

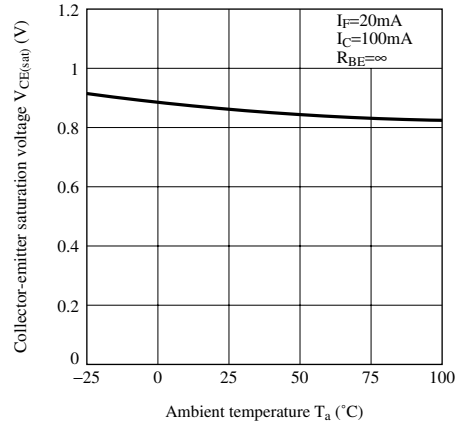


Fig.9 Collector Dark Current vs. Ambient Temperature

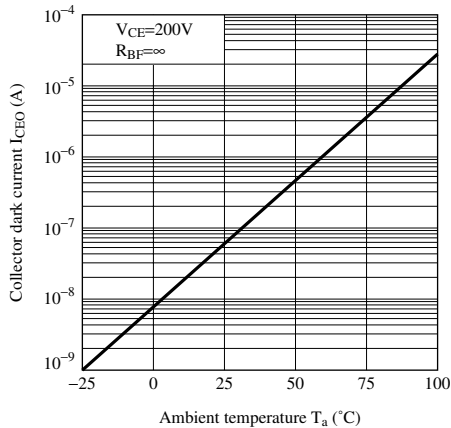


Fig.10 Response Time vs. Load Resistance

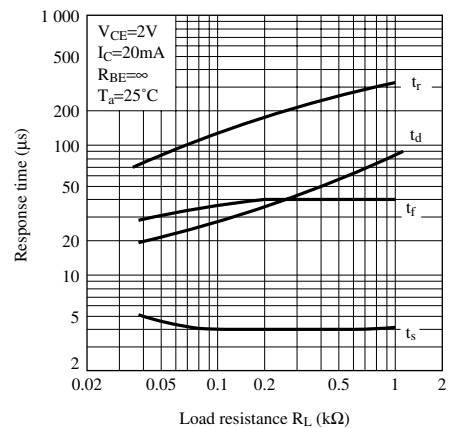


Fig.11 Test Circuit for Response Time

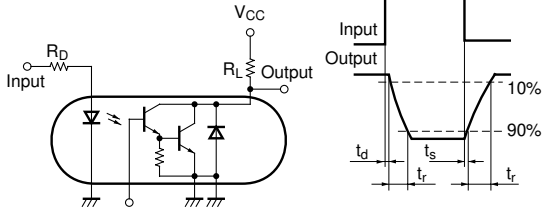


Fig.12 Frequency Response


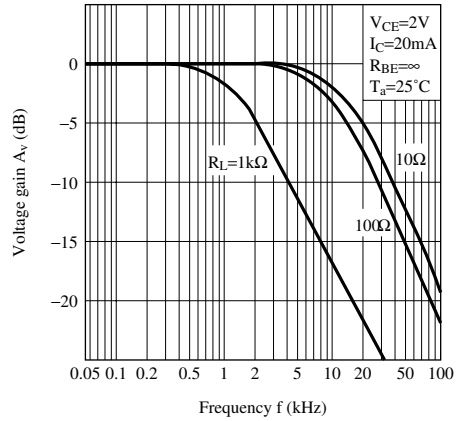


Fig.13 Test Circuit for Frequency Response

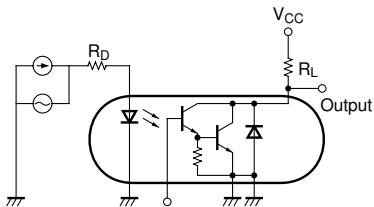

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

PC725V0NIZX/ PC725V0NIPX

■ Features

1. TTL compatible output
2. High collector-emitter voltage (V_{CEO} :300V)
3. High sensitivity (CTR:MIN. 1 000%)
4. Isolation voltage (Viso (rms):5kV)
5. Recognized by UL, file No.E64380
6. 6-pin DIP package (Lead forming type)

■ Applications

1. Home appliances
2. Programmable controllers
3. Peripheral equipment of personal computers

■ Model Line-up

Model No.	* Safty Standard Approval		Package	Packing
	UL	TÜV (VDE0884)		
PC725V0NIZX	○	—	Surface Mount	Sleeve
PC725V0NIPX	○	—	Mount	Taping

* Application Model No. PC725V

■ Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	300	V
	Collector-base voltage	V_{CBO}	300	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	150	mA
	Collector current (reverse)	$-I_C$	10	mA
	Collector power dissipation	P_C	300	mW
	Total power dissipation	P_{tot}	350	mW
	*2 Isolation voltage	V_{iso} (rms)	5	kV
	Operating temperature	T_{opr}	-25 to +100	°C
	Storage temperature	T_{stg}	-40 to +125	°C
	*3 Soldering temperature	T_{sol}	260	°C

*1 Pulse width≤100μs, Duty ratio=0.001


*2 40 to 60%RH, AC for 1 min

*3 For 10 s

High Sensitivity and High Collector-emitter Voltage Type Photocoupler

■ Outline Dimensions

(Unit : mm)

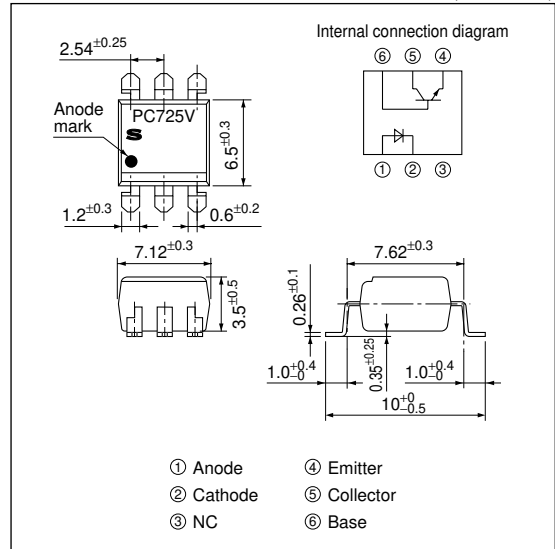

■ Electro-optical Characteristics

($T_a=25^{\circ}\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F=10\text{mA}$	—	1.2	1.4	V	
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$	—	—	3	V	
	Reverse current	I_R	$V_R=4\text{V}$	—	—	10	μA	
	Terminal capacitance	C_t	$V=0, f=1\text{kHz}$	—	30	250	pF	
Output	Collector dark current	I_{CEO}	$V_{CE}=200\text{V}, I_F=0, R_{BE}=\infty$	—	—	10^{-6}	A	
Transfer characteristics	Collector current	I_C	$I_F=1\text{mA}, V_{CE}=2\text{V}, R_{BE}=\infty$	10	40	150	mA	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20\text{mA}, I_C=100\text{mA}, R_{BE}=\infty$	—	—	1.2	V	
	Isolation resistance	R_{ISO}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	—	Ω	
	Floating capacitance	C_f	$V=0, f=1\text{MHz}$	—	0.6	1.0	pF	
	Cut-off frequency	f_c	$V_{CE}=2\text{V}, I_C=20\text{mA}, R_L=100\Omega, R_{BE}=\infty, -3\text{dB}$	1	7	—	kHz	
	Response time	Rise time	t_r	$V_{CE}=2\text{V}, I_C=20\text{mA}$ $R_L=100\Omega, R_{BE}=\infty$	—	100	300	μs
		Fall time	t_f		—	20	100	μs

Fig.1 Forward Current vs. Ambient Temperature

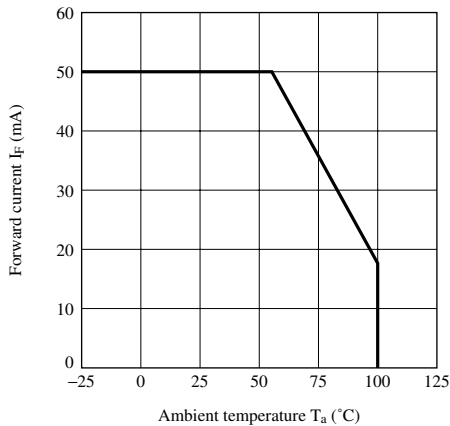


Fig.2 Collector Power Dissipation vs. Ambient Temperature

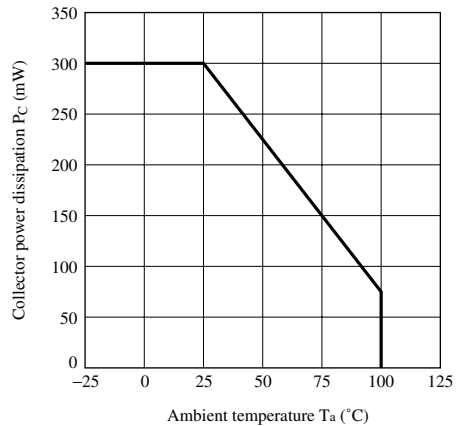


Fig.3 Peak Forward Current vs. Duty Ratio

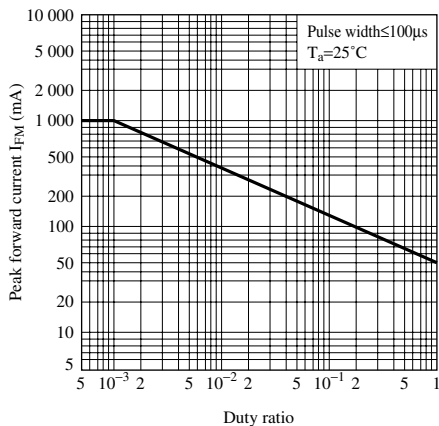


Fig.4 Forward Current vs. Forward Voltage

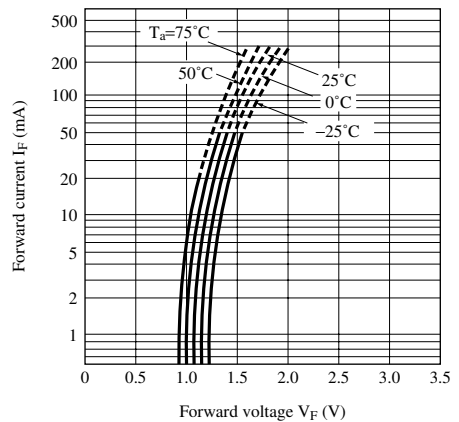


Fig.5 Current Transfer Ratio vs. Forward Current

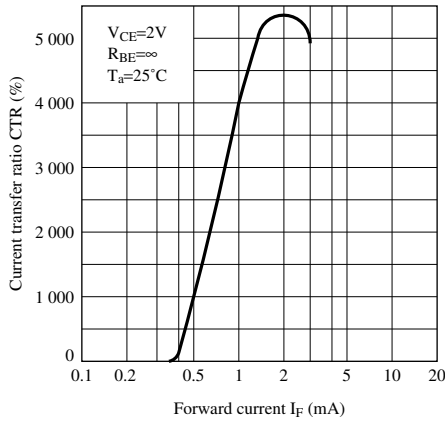


Fig.6 Collector Current vs. Collector-emitter Voltage

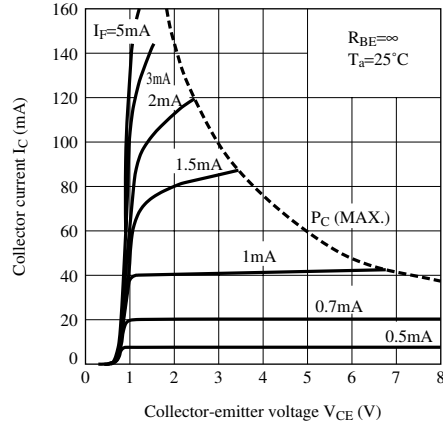


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

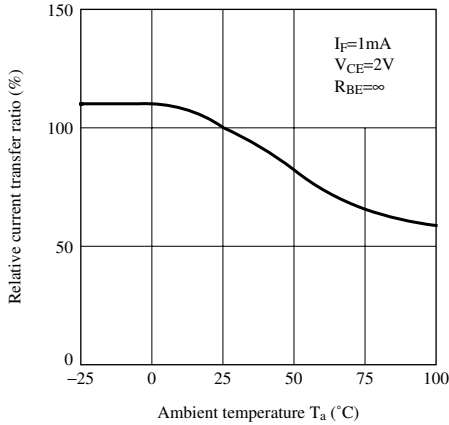


Fig.8 Collector - emitter Saturation Voltage vs. Ambient Temperature

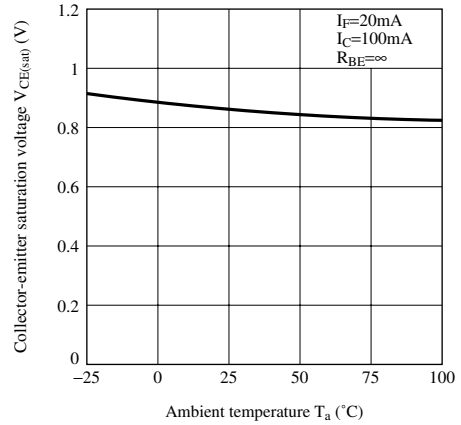


Fig.9 Collector Dark Current vs. Ambient Temperature

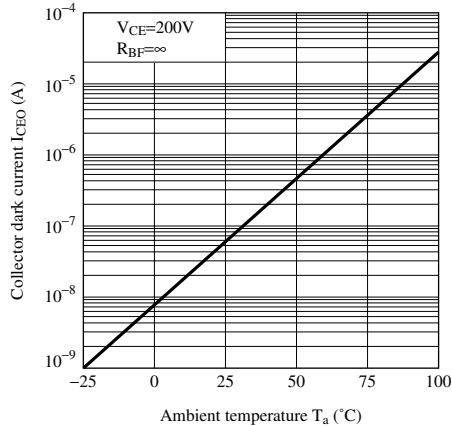


Fig.10 Response Time vs. Load Resistance

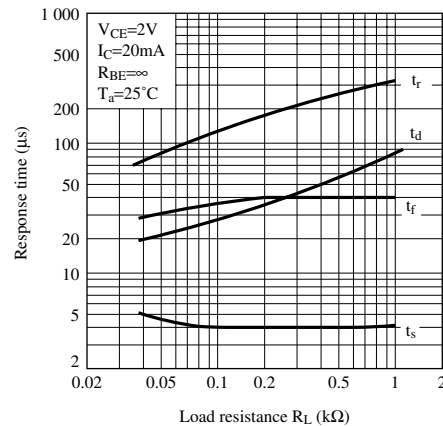


Fig.11 Test Circuit for Response Time

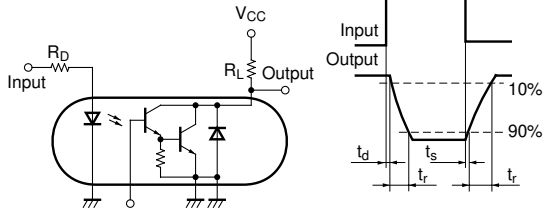


Fig.12 Frequency Response


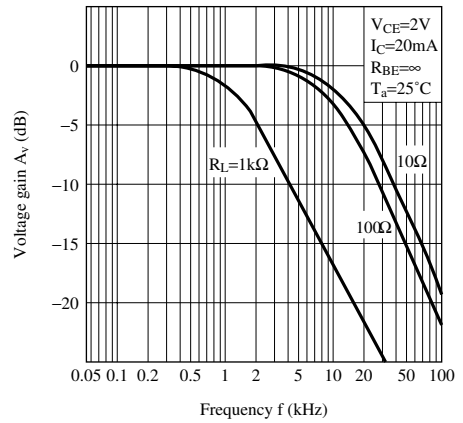


Fig.13 Test Circuit for Frequency Response

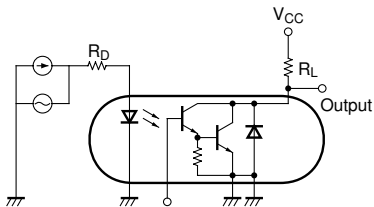

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

PC725V0YUZX

High Sensitivity and High Collector-emitter Voltage Type Photocoupler

■ Features

1. TTL compatible output
2. High collector-emitter voltage (V_{CEO} :300V)
3. High sensitivity (CTR:MIN. 1 000%)
4. Isolation voltage (Viso (rms):5kV)
5. Recognized by UL, file No.E64380
Approved by TÜV (VDE0884)
6. 6-pin DIP package (Lead forming type)
7. Sleeve packing

■ Applications

1. Home appliances
2. Programmable controllers
3. Peripheral equipment of personal computers

■ Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	300	V
	Collector-base voltage	V_{CBO}	300	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	150	mA
	Collector current (reverse)	$-I_C$	10	mA
	Collector power dissipation	P_C	300	mW
	Total power dissipation	P_{tot}	350	mW
	*2 Isolation voltage	$V_{iso (rms)}$	5	kV
	Operating temperature	T_{opr}	-25 to +100	°C
	Storage temperature	T_{stg}	-40 to +125	°C
	*3 Soldering temperature	T_{sol}	260	°C


*1 Pulse width \leq 100 μ s, Duty ratio=0.001

*2 40 to 60%RH, AC for 1 min

*3 For 10 s

■ Outline Dimensions

(Unit : mm)

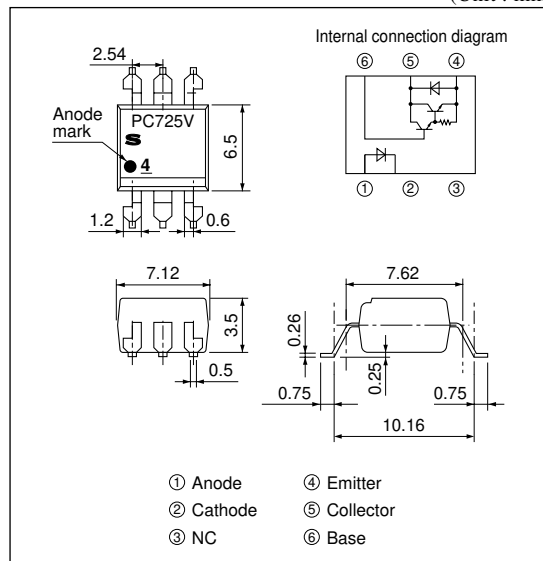

■ Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F=10\text{mA}$	-	1.2	1.4	V	
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$	-	-	3	V	
	Reverse current	I_R	$V_R=4\text{V}$	-	-	10	μA	
	Terminal capacitance	C_t	$V=0, f=1\text{kHz}$	-	30	250	pF	
Output	Collector dark current	I_{CEO}	$V_{CE}=200\text{V}, I_F=0, R_{BE}=\infty$	-	-	10^{-6}	A	
Transfer characteristics	Collector current	I_C	$I_F=1\text{mA}, V_{CE}=2\text{V}, R_{BE}=\infty$	10	40	150	mA	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20\text{mA}, I_C=100\text{mA}, R_{BE}=\infty$	-	-	1.2	V	
	Isolation resistance	R_{ISO}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	-	Ω	
	Floating capacitance	C_f	$V=0, f=1\text{MHz}$	-	0.6	1.0	pF	
	Cut-off frequency	f_c	$V_{CE}=2\text{V}, I_C=20\text{mA}, R_L=100\Omega, R_{BE}=\infty, -3\text{dB}$	1	7	-	kHz	
	Response time	Rise time	t_r	$V_{CE}=2\text{V}, I_C=20\text{mA}$ $R_L=100\Omega, R_{BE}=\infty$	-	100	300	μs
		Fall time	t_f		-	20	100	μs

Fig.1 Forward Current vs. Ambient Temperature

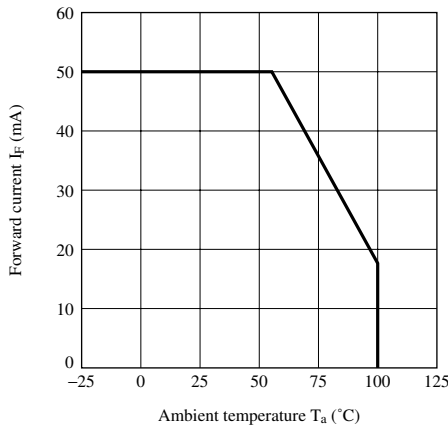


Fig.2 Collector Power Dissipation vs. Ambient Temperature

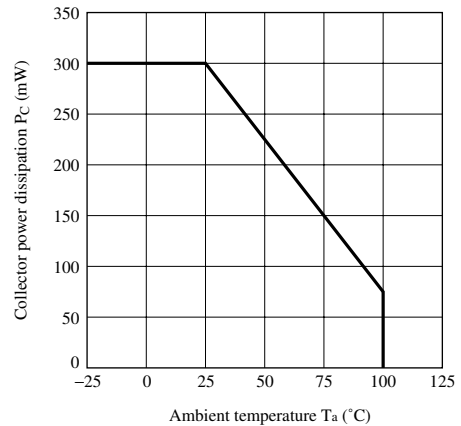


Fig.3 Peak Forward Current vs. Duty Ratio

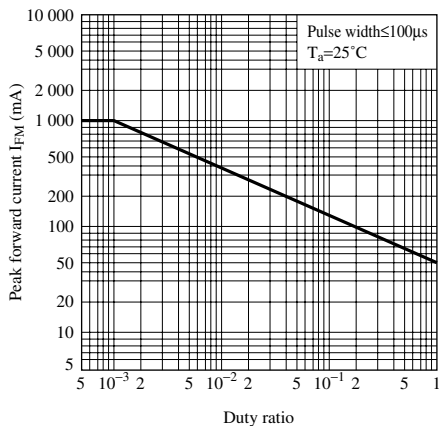


Fig.4 Forward Current vs. Forward Voltage

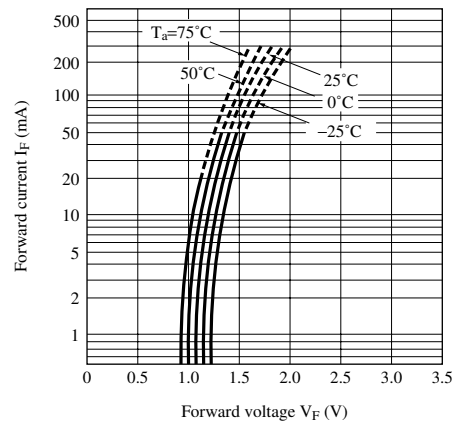


Fig.5 Current Transfer Ratio vs. Forward Current

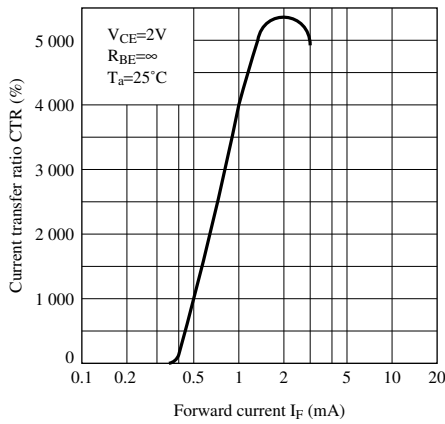


Fig.6 Collector Current vs. Collector-emitter Voltage

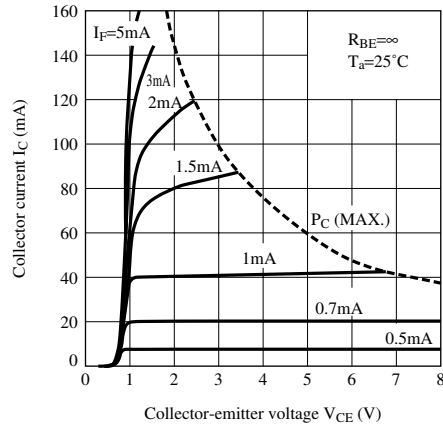


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

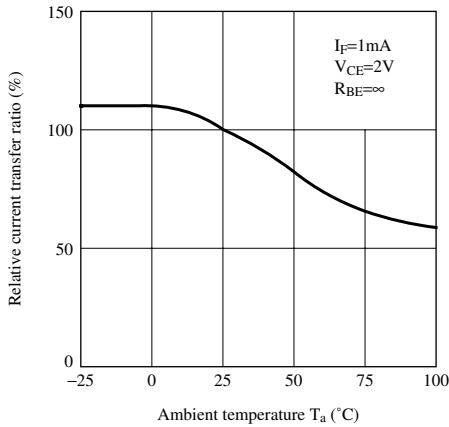


Fig.8 Collector - emitter Saturation Voltage vs. Ambient Temperature

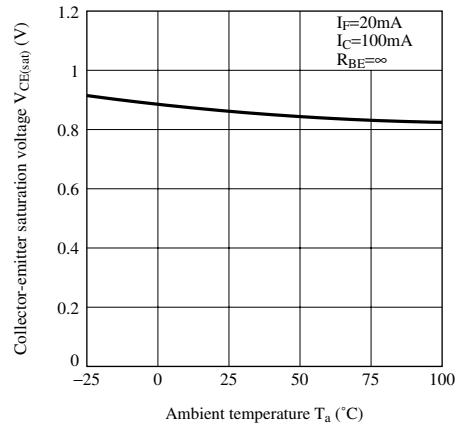


Fig.9 Collector Dark Current vs. Ambient Temperature

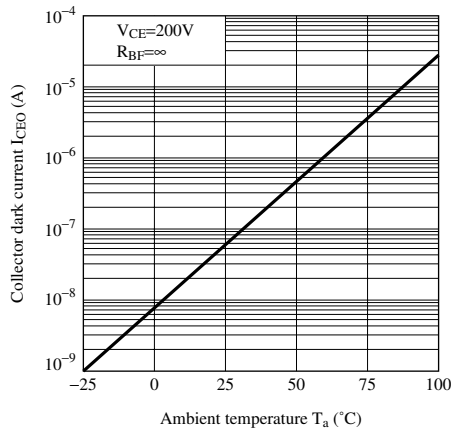


Fig.10 Response Time vs. Load Resistance

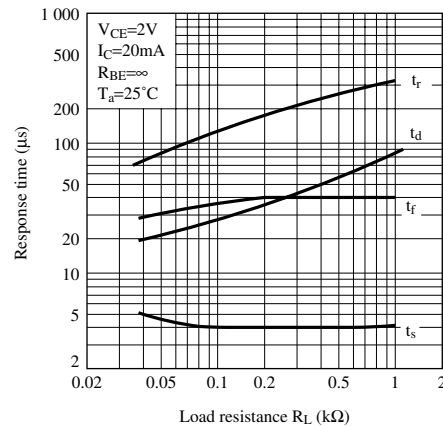


Fig.11 Test Circuit for Response Time

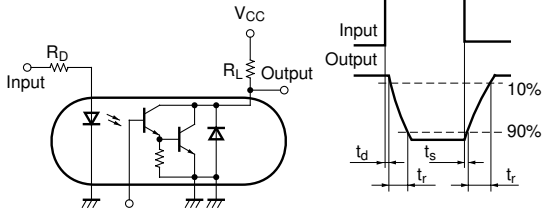


Fig.12 Frequency Response


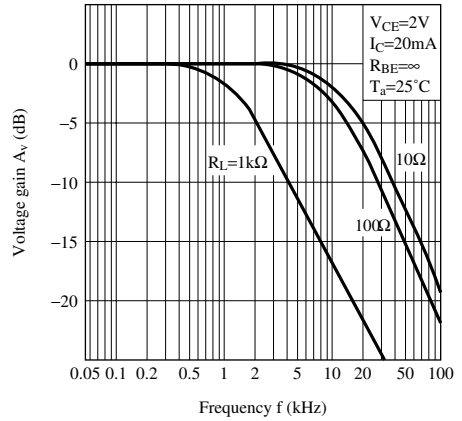


Fig.13 Test Circuit for Frequency Response

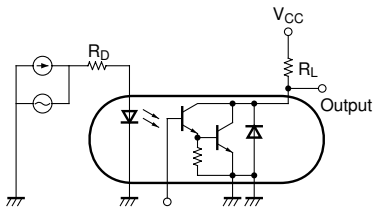

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.