



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PD140FNT60QMU-02C



Through Beam



Description

The PD140 sensor consists of an emitter, which sends out invisible, infrared light, and a receiver, capable of detecting the light from the emitter.

The sensor is encapsulated in a robust, vandal-proof aluminium/polycarbonate housing.

The lenses are adjustable in both $\pm 100^\circ$ horizontal and $\pm 15^\circ$ vertical directions, which allows flexible mounting, even when emitter and receiver are mounted at different heights.

The aspherical lens design gives a superior homogeneous light beam over the total beam angle.

- Sensor test function: the emitter has a built-in test input designed to mute the emitter and thus evaluate the sensor function. The test function is to be controlled and monitored by the door controller.

Main features

- Designed for Industrial doors and gates
- ESPE type 2, Performance level d
- For door or gate widths up to 60 m
- Modulated, infrared light
- Supply voltage: 12 to 24 VAC/DC
- 1 A, SPDT relay output
- Analogue voltage output or flashing LED indication for optical alignment help
- Built-in holder for green laser alignment accessory tool
- Yellow LED for output indication
- Green LED indication for power ON
- Connection: self-lifting terminal block, 1,5 mm² (AWG 16)
- Emitter test input
- Robust vandal-proof aluminium/polycarbonate housing
- IP65, NEMA 1. 2. 3. 3R. 3RX. 3SX. 3X. 5. 12. 12K rating
- CE, EN12453, EN12978, UL325 and UL508 approved

Main functions

- Designed for domestic and industrial doors and gates
- Detects presence or absence of persons or vehicles by interruption of the light beam from the emitter to receiver



References

Product selection key

PD140FNT60 -02C

Enter the code entering the corresponding option instead of

Code	Option	Description	-
P	-	Photoelectric sensor	
D	-	Rectangular housing	
140	-	Length of housing	
F	-	Aluminium	
N	-	Not used	
T	-	Through-beam	
60	-	Distance [m]	
<input type="checkbox"/>	QMU	Matched sensor set (Receiver and Emitter)	
	Q	SPDT relay (Receiver)	Sensor is only available as a matched set
	MU	Mute input (Emitter)	Sensor is only available as a matched set
-02C	-	Black	

Type selection

Function	-	Code
Receiver and Emitter	Sensor set	PD140FNT60QMU-02C
Receiver	Not available	PD140FNT60Q-02C
Emitter	Not available	PD140FNT60MU-02C

Structure

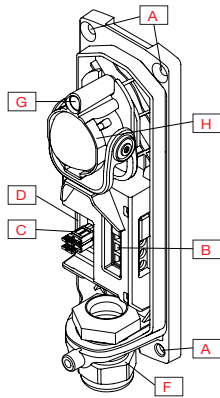


Fig. 1 Emitter

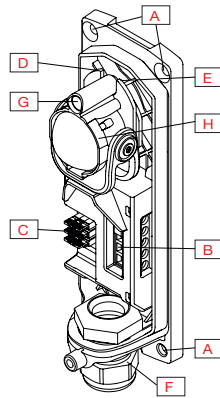


Fig. 2 Receiver

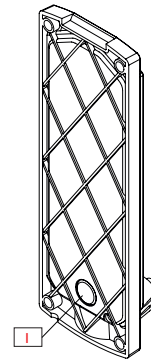


Fig. 3 Rear view

Element	Component	Element	Component
A	Fixing holes for sensor mounting	F	Cable gland for cable entry
B	Terminal block	G	Hole for laser adjustment tool
C	Jumpers	H	Lens adjustment
D	Green LED	I	Alternative cable entry
E	Yellow LED		

Sensing

Detection


Rated operating distance (S_n)	≤ 60 m	@ target, PD140 emitter and excess gain 4
Sensitivity adjustment (Receiver)	12 m ... 60 m	Jumper pos 1
	6 m ... 12 m	Jumper pos 2
	0.6 m ... 6 m	Jumper pos 3
Blind zone	0.6 m	
Hysteresis	10 ... 20%	
Light source	850 nm	Infrared
Light type	Infrared modulated	
Detection angle	≤ ± 5°	
Emitter beam angle	≤ ± 5°	
Light spot size	3.7 m	@30 m (half sensing distance)
Lens adjustment	± 100°	Horizontal
	± 15°	Vertical

Accuracy

Temperature drift	≤ 0.3%/°C
Repeatability	< 5%




Detection diagram

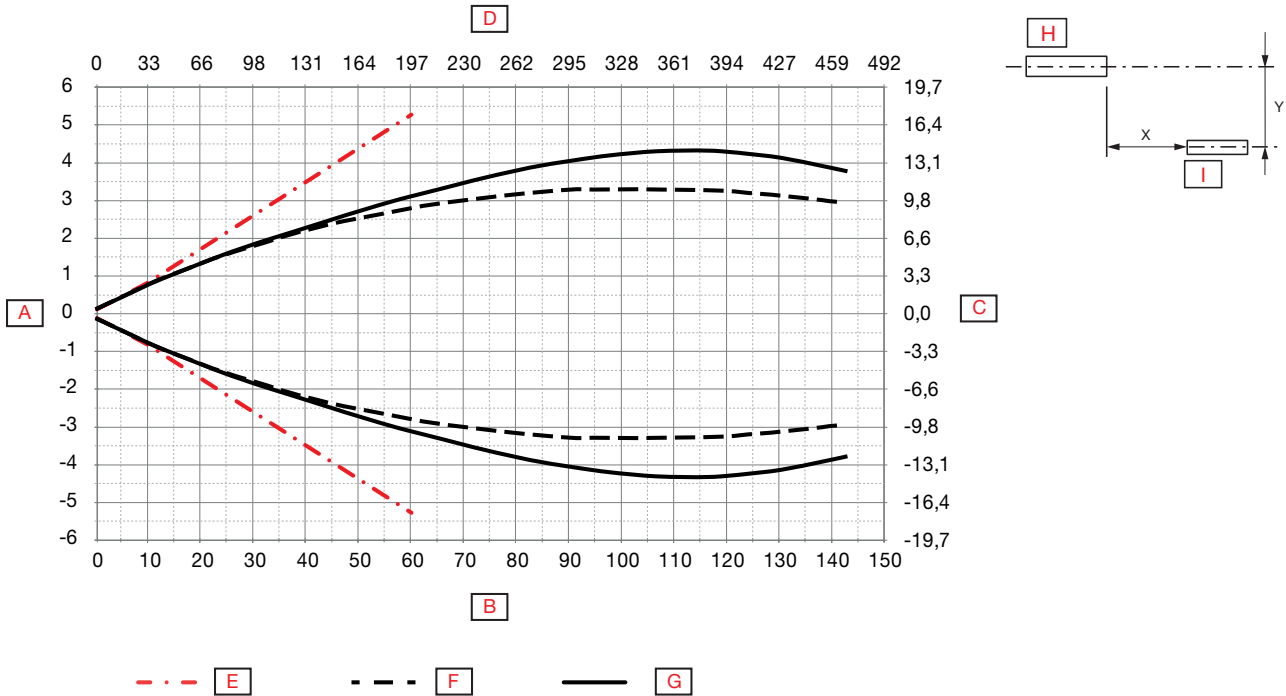

A	Detection width [m]	F	OFF
B	Sensing range [m]	G	ON
C	Detection width [feet]	H	Emitter
D	Sensing range [feet]	I	Receiver
E	Limits		



Excess gain

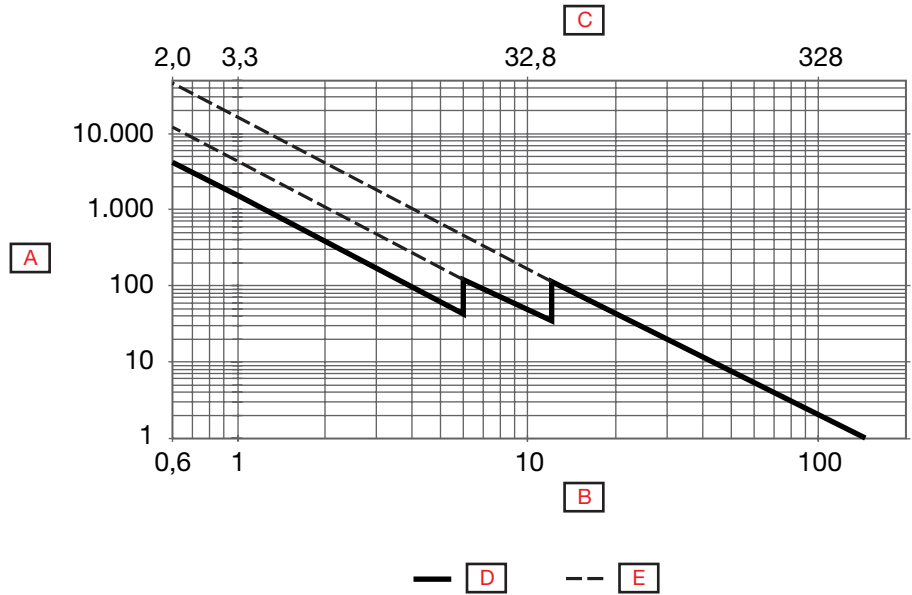

A	Excess gain	D	ESPE 2, legal detection angle ⁵⁾
B	Sensing range [m]	E	ESPE 2, illegal detection angle ⁵⁾
C	Sensing range [feet]		

⁵⁾ See detection diagram



Features

Power Supply


Rated operational voltage ($U_{e-min} - U_{e-max}$)	12 ... 24 V AC/DC (ripple included)	
Rated operational voltage (U_B)	10.2 ... 35 V DC	
	10.2 ... 26.4 V AC	
Ripple (U_{rpp})	Within limits of U_B min	
No load supply current (I_o) DC	≤ 55 mA @ U_B max	Emitter
	≤ 50 mA @ U_B max	Receiver
No load supply current (I_o) AC	≤ 100 mA @ U_B max	Emitter
	≤ 100 mA @ U_B max	Receiver
Power-ON delay (t_v)	≤ 200 ms	Emitter
	≤ 200 ms	Receiver

Outputs

Output functions	SPDT relay	
Output switching function	N.O. and N.C.	
Output current	< 1 A / 30 VDC	Continuous(I_o)
	< 0.5 A / 50 VAC	Continuous(I_o)
Minimum operational current (I_m)	≥ 1 mA @ 5 V	
Mechanical lifetime	$\geq 5\,000\,000$ cycles	
Electrical lifetime (typical)	$> 100\,000$ cycles @ Resistive load AC-1 and DC-1	
Protection	reverse polarity and transients	Emitter and Receiver
Utilization category	AC-1	Non-inductive or slightly inductive loads, resistive load
	DC-1	EN 60947-4-1
	AC-14	Control of small electromagnetic loads EN 60947-5-1
	DC-13	Control of electromagnets EN 60947-5-1 (with freewheeling diode)



Operation diagram

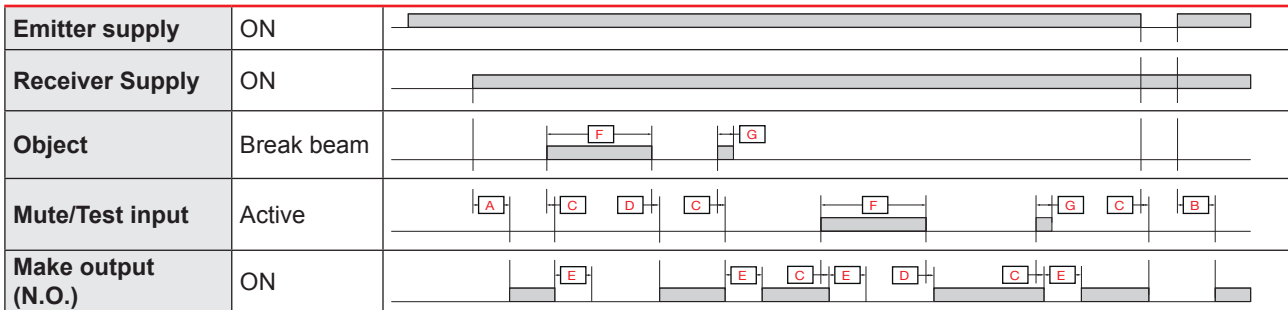

A	Receiver startup time (150 ms)	E	OFF Hold Time (80 ms)
B	Emitter startup time (150 ms)	F	Beam obstruction / mute active > 80 ms
C	Break response time (8 ms)	G	Beam obstruction / mute active < 80 ms
D	Make response time (8 ms)		

Response times

Operating frequency (f)	10 impulses / sec.	
Response times	t _{ON} (ON-OFF)	< 8 ms
	t _{OFF} (OFF-ON)	< 8 ms
	OFF Hold time	> 80 ms

Indication

Receiver

Green LED	Yellow LED	Power	Output
ON	OFF	ON	OFF
ON	ON	ON	ON
ON	Flash ¹⁾	ON; EG ≥ 4	OFF / Alignment mode
OFF	Flash ¹⁾	EG < 4	OFF / Alignment mode

¹⁾ Slow flashing or OFF = Not aligned, Higher flash rate= Better optical alignment
EG = Excess gain

Emitter

Green LED	Yellow LED	Power	Emitting
ON	-	ON	Yes
OFF	-	ON	No (muted)



Environmental

Ambient temperature	-25°... +60°C (-13°... +140°F)	Operating ^{2) 3)}
	-40° ... +70°C (-40° ... +158°F)	Storage ²⁾
Ambient light	≥ 100 000 lux	Incandescent light @ 3000 ... 3200 °K (EN 60947-5-2)
	≥ 10 000 lux ⁴⁾	Incandescent light 3200 °K (EN 61496-2)
	≥ 3 000 lux ⁴⁾	Fluorescent light (EN 61496-2)
	0.05 J @ 200 Hz to 0.5 J @ 5 Hz ⁴⁾	Stroboscopic light (EN 61496-2)
	3 to 5 J @ 0.5 to 2 Hz ⁴⁾	Flashing beacon light (EN 61496-2)
Vibration	10 ...150 Hz, 1.0 mm/15 g	EN 60068-2-6
Shock	30 g _n / 11ms, 6 pos, 6 neg per axis	EN60068-2-27
Drop test	2 x 1 m and 100 x 0.5 m	EN 60068-2-31
Rated insulation voltage (U_i)	50 VDC	
Dielectric insulation voltage	≥ 4000 VAC rms	50/60 Hz for 1 min.
Rated impulse withstand voltage	≥ 2 kV	1.2/50 µs
Pollution degree	3	EN60947-1
Overvoltage category	III	IEC60664; EN60947-1
Degree of protection	IP65	IEC60539; EN60947-1
NEMA Enclosure Types	Indoor + outdoor: 3, 3R, 3RX, 3SX, 3X	NEMA 250
	Indoor: 1, 2, 5, 12, 12K	NEMA 250
Ambient humidity range	< 50% @ 70°C ²⁾	
	RH < 90% @ 20°C ²⁾	

- 2) With no icing or condensation
- 3) UL325 -25°... +55°C
- 4) Failure to danger (worst case alignment)

EMC

Electrostatic discharge immunity test	± 8 kV @ air discharge	IEC 61000-4-2
	± 15 kV @ contact discharge (Closed sensor with aluminium housing)	
	± 8 kV @ contact discharge (during installation)	
Radiated radio-frequency electromagnetic field immunity test (80 MHz ... 1 GHz and 1.4 GHz ... 2 GHz)	10 V/m	IEC 61000-4-3
Electrical fast transient/Burst immunity test	4 kV / 5 kHz using the capacitive coupling clamp	IEC 61000-4-4
Conducted disturbances induced by radio-frequency fields immunity test (150 kHz ... 80 MHz)	10 V rms	IEC 61000-4-6
Power frequency magnetic field immunity test	300 A/m	IEC 61000-4-8

Mechanics/electronics

▶ Connection

Cable diameter	Ø 5 ... 10 mm	
Connection	3-pole screw terminal	Emitter
	5-pole screw terminal	Receiver
Terminal	Self-lifting terminal block, 1.5 mm ² (AWG 16) □ 2.6 x 2 mm	

▶ Wiring




Fig. 4 Receiver





Fig. 5 Emitter

A	Power supply	C	Relay contacts
B	Mute input (Test input)		

▶ Housing




Cover	Aluminium, Black
Window	PC, Black
Back part	PBT, Black
Sealing	Neoprene
Cable gland	PA6, Light grey
Dimensions	140 x 51 x 46 mm
Weight	≤ 460 g (matched set)

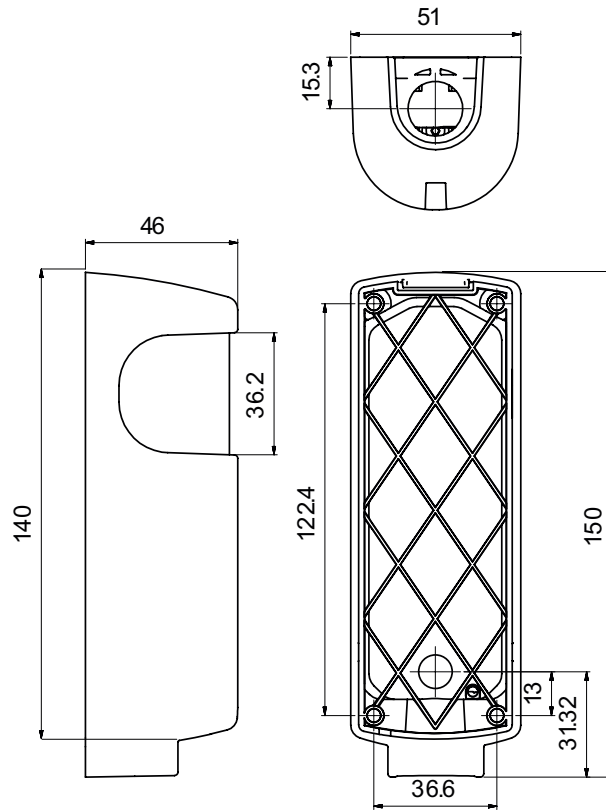Dimensions (mm)



Compatibility and conformity

Approvals and markings

General reference	Sensor designed according to EN60947-5-2	
MTTF_d related to product life time	49.9 years @ 40°C (+104°F)	EN ISO 13849-1 (Parts count method, annex D.1), SN 29500
MTTF_d related to safety device, performance level_d	1332 years @ 40°C (+104°F)	EN ISO 13849-1, SN 29500
CE-marking		
Approvals	 	
ESPE category	2	EN61496-2
Performance level (PL)	d	EN12453
PFH_d	8.57 x 10 ⁻⁸ Errors per hour	EN ISO 13849-1
Mission Time	20 years	EN ISO 13849-1


Delivery contents and accessories

Delivery contents

- Photoelectric sensor set: PD140FNT60Q-02C + PD140FNT60MU-02C
- Accessory bag (Screws, plugs, blind caps, cable glands)
- Packaging: Card board box

Accessories

- Laser alignment tool: APD140-LA01
- Laser alignment tool without batteries (Battery: DL1/3N, CR1/3N 3V - Lithium): APD140-LA02
- Alignment test cable: APD140-TC01



COPYRIGHT ©2016
Content subject to change. Download the PDF: www.productselection.net