



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PGR-4700 SERIES (RCD300M2)

Sensitive Ground-Fault Relay



Description

The PGR-4700 Sensitive Ground-Fault Relay provides sensitive ground-fault protection without nuisance tripping. It detects very low-level leakage current on large circuits to avoid or significantly reduce equipment damage. The leakages can be identified as they develop and ground faults can be detected before they become critical.


Applications

Ground-fault relays can be used for the protection of critical circuits in panel boards and switch boards, OEM power distribution panels and custom controls. They are typically used in critical load applications with costly downtime and hazards, such as high humidity, water, dust, chemicals, and vibration.

Features/Benefits

- Adjustable trip level settings from 10 mA to 3.0 A
- Advanced harmonic filtering
- Compatible with VFD applications
- Adjustable time delay
- Metering output with PLC interface for continuous monitoring of system
- CT loop monitoring

Simplified Circuit Diagram

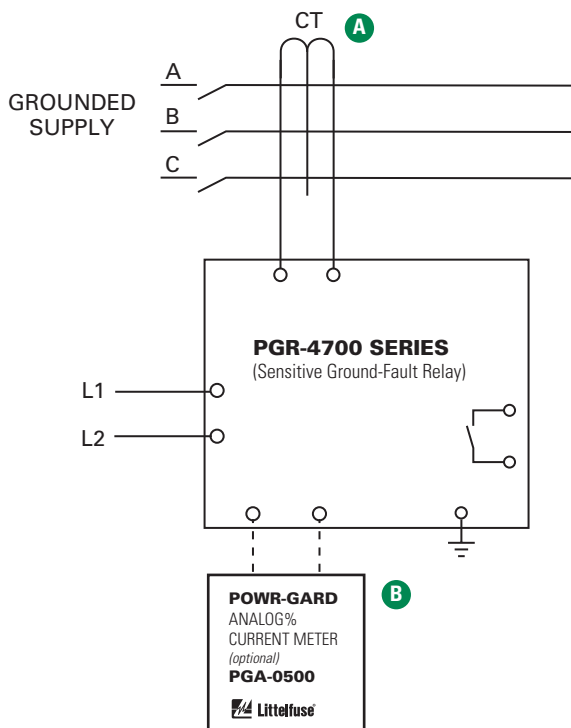

Accessories

- A** **PGC-5000 Series Ground-Fault Transformer**
Required zero-sequence current transformer specifically designed for low level detection. Flux conditioner is included to prevent saturation.
- B** **PGA-0500 Analog % Current Meter**
Optional panel-mounted analog meter displays ground-fault current as a percentage of the set-point.

Specifications

| | |
|---------------------------------|--|
| IEEE Device Numbers | 50G, 50N, 51G, 51N |
| Input Voltage | See ordering information |
| Dimensions | H 75 mm (3.0"); W 55 mm (2.2"); D 115 mm (4.5") |
| Trip Level Settings | 10 mA – 3.0 A |
| Trip Time Delay Settings | 0–1.5 s |
| Contact Operating Mode | Selectable fail-safe or non-fail-safe (Internal switch) |
| Harmonic Filtering | Standard |
| Test Button | Standard |
| Reset Button | Standard |
| CT Loop Monitoring | Standard |
| Relay Contacts | 2 Form C |
| Communications | Analog Output |
| Conformally Coated | Consult factory |
| Approvals | UL listed (E183688) |
| Warranty | 5 Year |
| Mounting | DIN, Surface (Standard) Panel (with PMA-55 or PMA-60 adapter) |

Ordering Information

| | |
|-----------------------------|-----------------------|
| PGR-4700-24 | 24 Vdc Control Power |
| PGR-4700-120 | 120 Vac Control Power |
| PGR-4700-240 ⁽¹⁾ | 240 Vac Control Power |

Notes: 1. Not available with UL