

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









January 2018

## PiezoHapt™ Actuators

For general use

# PHU series

PHUA8060-35A-33-000 PHUA3015-30A-21-000



Products in this catalog are in preparation for mass production.



#### REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

#### **SAFETY REMINDERS**

Please pay sufficient attention to the warnings for safe designing when using this products.

| ⚠ REMINDERS  |
|--|
| In use of this product, it should be minded by notes and please perform a safety design, after checking the individual standard for every uni enough.  |
| O Do not apply DC bias to the product. In addition, the insulation resistance may be reduced and the function may not be performed.  |
| Use piezoelectric devices so that moisture-containing substances and water droplets do not come into contact with each other.  |
| There is a risk of performance degradation, adhere to the following matters. Store the product in a packaged condition to avoid sudden temperature changes, condensation, direct sunlight, corrosive gas, dust, and dust Use within six months. Do not apply strong shocks (fall etc.) or pressure by which a crack goes into a product. |
| Do not supply any voltage higher than applicable to the product.  Do not use the piezoelectric buzzer outdoors. It is designed for indoor use.  Do not apply the temperature more than 150°C.  |
| <ul> <li>When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.</li> </ul>  |
| On not wash the product in such a way that solvent or gas can penetrate the product.   |
| O Handle piezoelectric devices with care so that they do not touch them by hand. It can cause corrosion and the charge being charged may be discharged to the hands.   |
| Objecting the product before connecting it to the measuring instrument.  |
| On not remove the piezoelectric element from the diaphragm.  |
| ○ When soldering, be careful not to attach flux or other foreign matter to the piezoelectric device.   |
| ○ When soldering a terminal pin, perform the soldering in clean conditions without contamination or rust in order to avoid poor connections.   |
| Check the resonant frequency in the mounting condition, and use the product within the range where the resonant frequency is not affected by<br>the resonance with a reference value of 1/2 or less of the resonant frequency.   |
| When fixing the product by adhesion, etc., investigate the type, amount, adhesion, etc. of the adhesive, conduct a reliability evaluation test<br>and confirm that there are no abnormalities.   |
| On not use the product on a device that allows consumers to touch the product.   |
| On not rework the product.   |
| ○ The characteristics may vary depending on the shape and location of the mounting part. Check the mounted condition.  |
| <ul> <li>Please take appropriate measures such as acquiring protective circuits and devices that meet the uses, applications, and conditions of the instruments and keeping backup circuits.</li> </ul>  |
| • We are not liable for any damage caused by the use of equipment (automobiles, aircraft, medical equipment, nuclear power equipment, etc.   |

that requires high safety and reliability, or that may cause damage to human life, body, property, etc., or that may have a significant social impact due to a product failure, malfunction, or failure, as well as the use of the product beyond the scope and conditions of this catalog.

- O Do not use it in the following environments
  - · Corrosive gases (Cl2, NH3, H2S, SOx, NOx, etc.)
  - Environments with highly conductive substances (electrolytes, water, saltwater, etc.)
  - · Environments with acid, alkali, or organic solvents
  - · Places to be exposed to dust.



Product compatible with RoHS directive

## PiezoHapt™ actuators

For general use

## **Overview of the PHU series**

#### **FEATURES**


- OIt is thin and can support various application.
- Olt is possible to obtain a clear response by low-voltage drive.
- OIt answers in an instant and can respond to a variegated vibration pattern (vibrational frequency).

#### APPLICATION


Touchpad, displays, amusement equipment, game controller, wearable devices etc.

#### ■ DRIVE CIRCUIT BLOCK DIAGRAM EXAMPLE

#### □Discrete

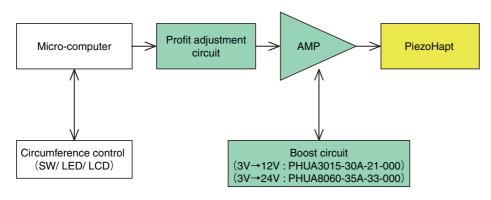

#### ■ Haptic driver IC

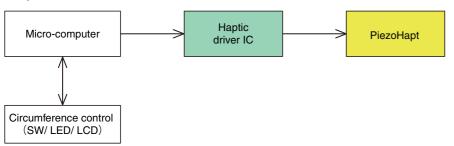


 $\bigcirc \ \mathsf{RoHS} \ \mathsf{Directive} \ \mathsf{Compliant} \ \mathsf{Product} \\ \mathsf{:See} \ \mathsf{the} \ \mathsf{following} \ \mathsf{for} \ \mathsf{more} \ \mathsf{details.} \ \mathsf{https://product.tdk.com/info/en/environment/rohs/index.html$ 

#### PiezoHapt™ Actuators



### **Overview of the PHU series**

#### PART NUMBER CONSTRUCTION

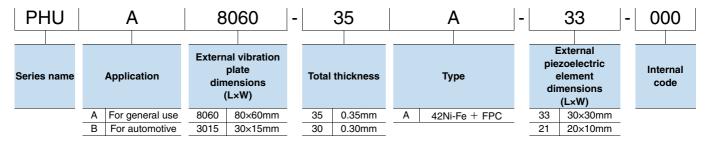


#### ■ PRODUCT LINEUP

#### **□**SPECIFICATIONS

| Part No.                       |                 |         | PHUA8060-35A-33-000 | PHUA3015-30A-21-000 |
|--------------------------------|-----------------|---------|---------------------|---------------------|
|                                |                 |         |                     |                     |
| Dimensions                     | Vibration plate | (mm)    | 80×60×0.25          | 30×15×0.1           |
|                                | Element         | (mm)    | 30×30×0.1           | 20×10×0.2           |
| Vibration plate specifications |                 | 42Ni-Fe | 42Ni-Fe             |                     |
| Electrode specification        |                 | FPC     | FPC                 |                     |

#### **□**CHARACTERISTICS

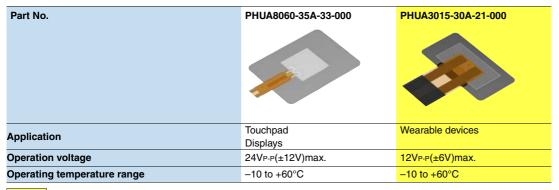

Background yellow: The product which is in preparation for mass production.




## PHUA8060-35A-33-000


#### APPLICATION

Suitable for touch panel and display.

#### **SHAPE & DIMENSIONS**



Dimensions in mm



**■ RECOMMENDED WIRING** 



· Product shape are subject to change without notice.


#### **SPECIFICATIONS**

| Vibration plate specifications |                   | 42Ni-Fe                       |
|--------------------------------|-------------------|-------------------------------|
| Electrode<br>specification     | FPC               |                               |
|                                | Width             | 12mm                          |
|                                | Number of cores   | 2                             |
|                                | Insulation length | 30mm                          |
|                                | Lead pitch        | 7.0mm                         |
|                                | Stripping length  | 5.0mm                         |
|                                | Reinforcement     | 8.0mm                         |
| Operation voltage              |                   | 24V <sub>P-P</sub> (±12V)max. |
| Operating temperature range    |                   | −10 to +60°C                  |




## PHUA8060-35A-33-000

#### ■ PACKAGING STYLE/PACKING NUMBER/MINIMUM ORDERING UNIT

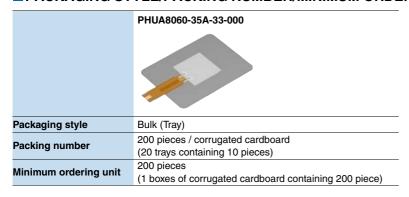

#### □Tray

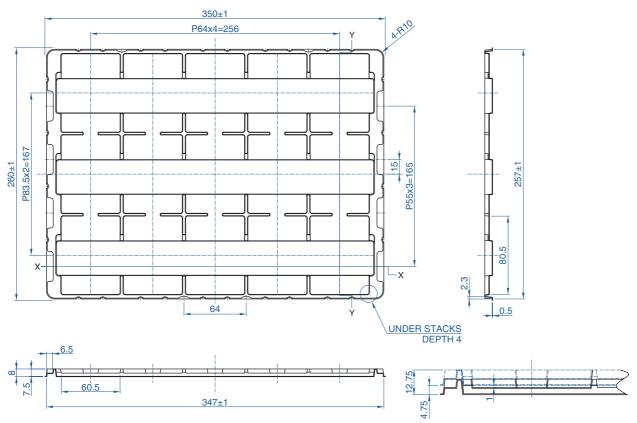

#### PiezoHapt™ Actuators




## PHUA3015-30A-21-000

#### APPLICATION


O Suitable for small equipment such as wearable devices.


#### **SHAPE & DIMENSIONS**



· Product shape are subject to change without notice.

#### **■ RECOMMENDED WIRING**





Dimensions in mm

#### SPECIFICATIONS


| Vibration plate sp          | ecifications      | 42Ni-Fe                      |
|-----------------------------|-------------------|------------------------------|
| Insulation specifications   |                   | Without insulation           |
| Electrode<br>specification  | FPC               |                              |
|                             | Width             | 12mm                         |
|                             | Number of cores   | 2                            |
|                             | Insulation length | 14.5mm                       |
|                             | Lead pitch        | 7.0mm                        |
|                             | Stripping length  | 5.0mm                        |
|                             | Reinforcement     | 8.0mm                        |
| Operation voltage           |                   | 12V <sub>P-P</sub> (±6V)max. |
| Operating temperature range |                   | -10 to +60°C                 |

#### PiezoHapt™ Actuators



## PHUA3015-30A-21-000

#### ■ PACKAGING STYLE/PACKING NUMBER/MINIMUM ORDERING UNIT

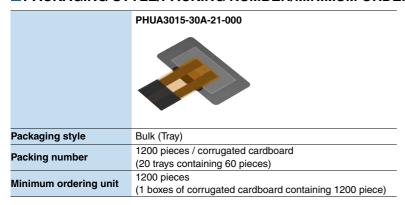

#### □Tray

