



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**PI3WVR31313A**

**DP/HDMI 1:3 De-multiplexer switches**

**Features**

- DP/HDMI 1:3 De-multiplexer switch with 4 high speed differential channel and AUX/DDC, HPD and CAB\_DET signal channels
- Two passive output ports for DP1.2 at 5.4Gbps signals
- One active output port with integrated DP to HDMI re-driver (level shifter) supports HDMI 1.4 at 3.4Gbps
- Pin control mode supports auto port priority selection
- Pin control mode supports port3 with DDC bi-direction buffer switch only
- I2C control mode supports auto port priority selection
- I2C control mode supports port3 with 8 levels equalization and 5 levels pre-emphasis
- I2C control mode supports port3 with either DDC bi-direction buffer switch or DDC passive switch
- Very low operating power when passive port1 and port2 are selected
- 3.3V power supply
- 2KV HBM ESD protection for all I/O pins
- Support Type2 cable ID register
- Packaging:  
60 pin TQFN package (5x9mm, 0.4mm pitch)


**Description**

PI3WVR31313A has two passive output port1 and port2, one active (DP to HDMI) output port3. Passive output ports support DP1.2 at 5.4Gbps. Active port3 support HDMI1.4b at 3.4Gbps. All three output ports support auto port priority selection. Input port accepts DP1.2 and DP++ signals associated with output ports as described above.


**Application**

- Notebook

**Pin Configuration: TQFN-60**

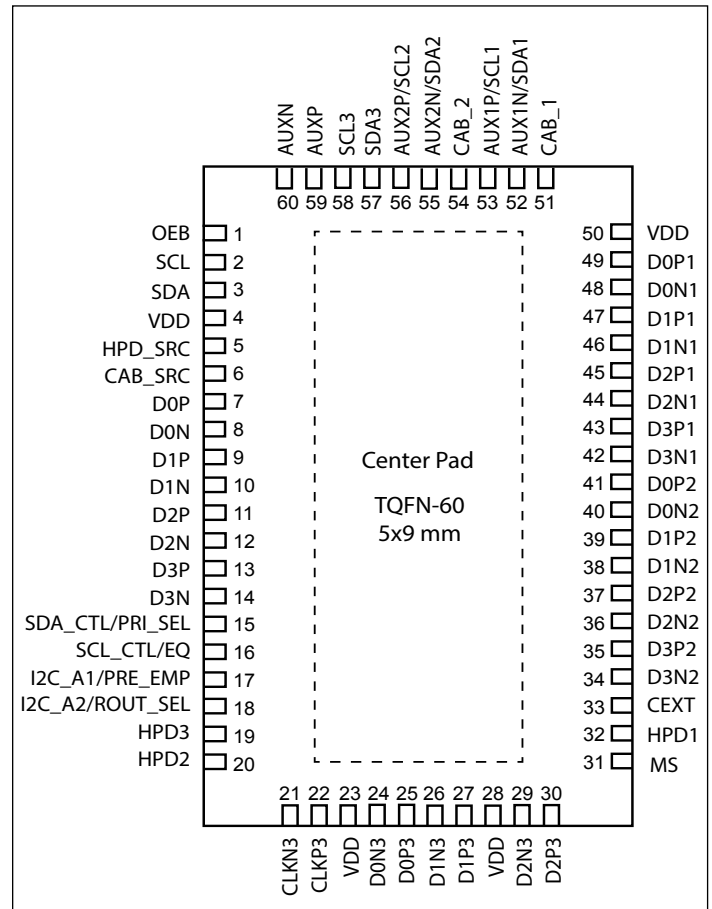

**Block Diagram**

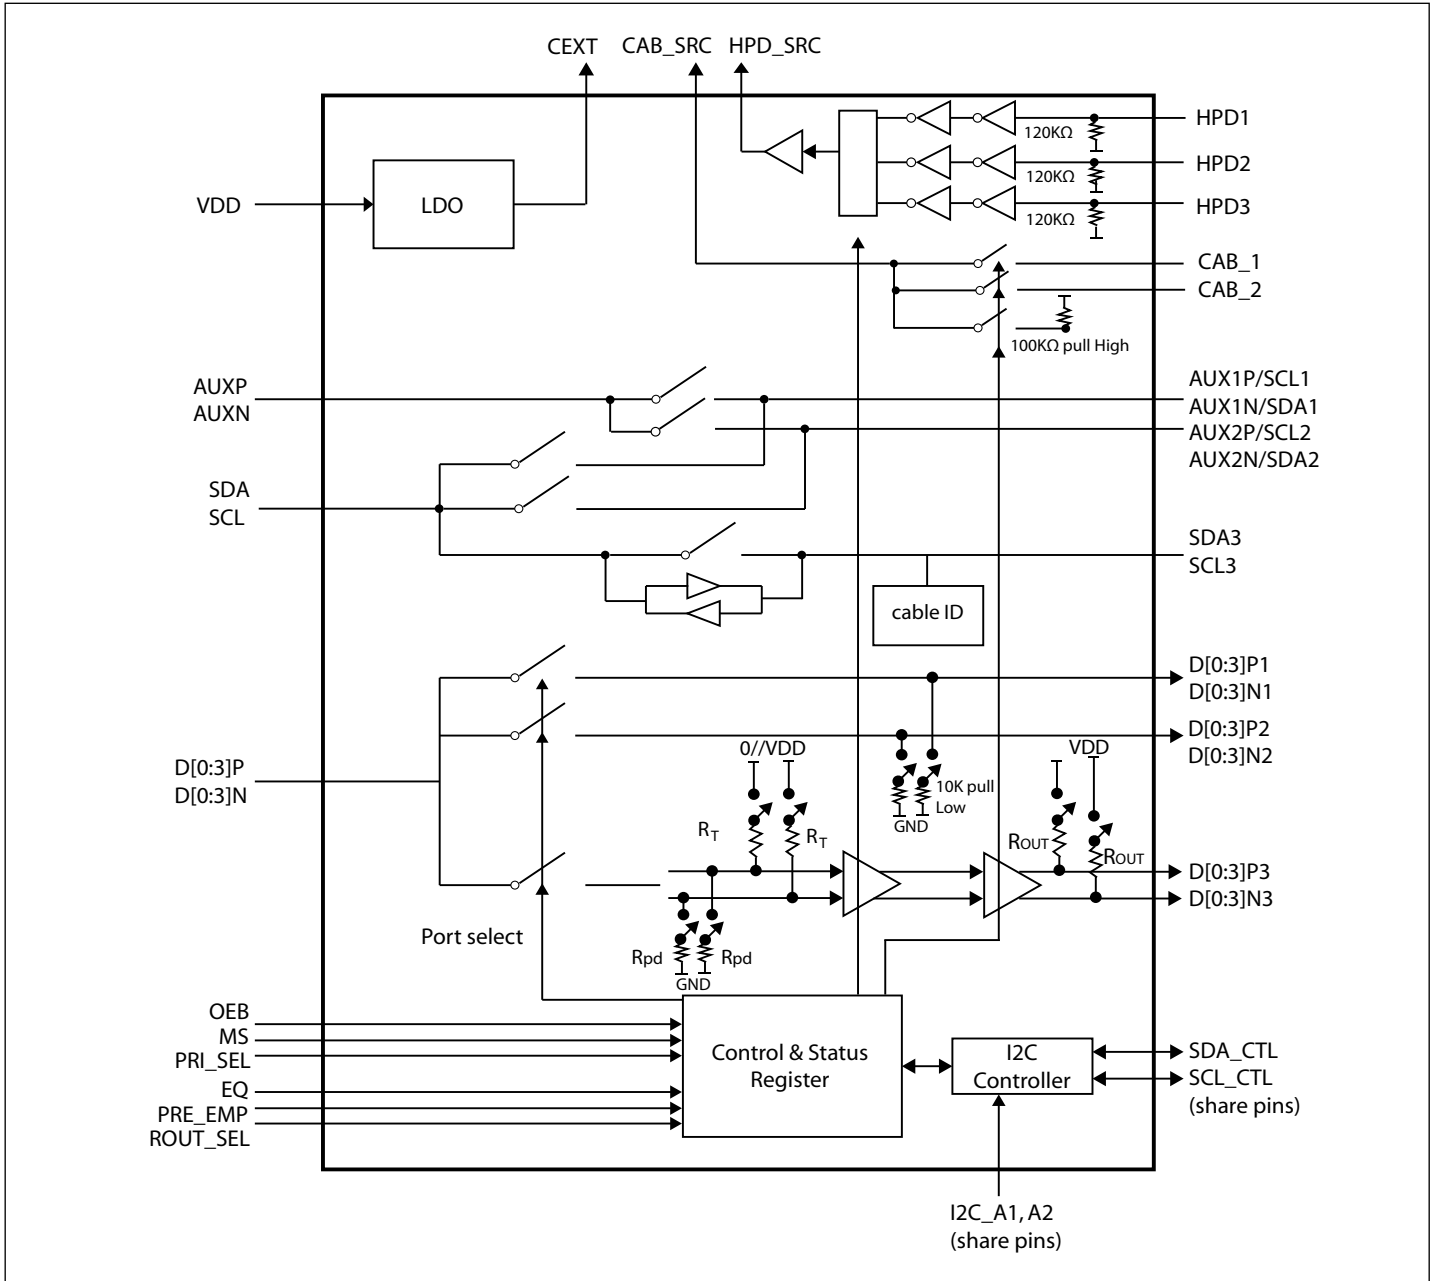

### Pin Description

pin#	pin Name	Signal Type	Description
7	D0P	I	4 differential pair input (DP or DP++)
9	D1P		
11	D2P		
13	D3P		
8	D0N		
10	D1N		
12	D2N		
14	D3N		
49	D0P1	O	4 differential pair output (DP) for port 1 and port 2
47	D1P1		
45	D2P1		
43	D3P1		
48	D0N1		
46	D1N1		
44	D2N1		
42	D3N1		
41	D0P2		
39	D1P2		
37	D2P2		
35	D3P2		
40	D0N2		
38	D1N2		
36	D2N2		
34	D3N2		
30	D2P3	O	4 differential pair output (HDMI) for port 3
27	D1P3		
25	D0P3		
29	D2N3		
26	D1N3		
24	D0N3		
22	CLKP3		
21	CLKN3		



pin#	pin Name	Signal Type	Description
52	AUX1N/SDA1	IO	AUX (DP) or DDC (HDMI) to three ports
55	AUX2N/SDA2		
53	AUX1P/SCL1		
56	AUX2P/SCL2		
57	SDA3		
58	SCL3		
60	AUXN	IO	AUX to DP-source
59	AUXP		
3	SDA	IO	DDC to DP-source
2	SCL		
32	HPD1	I	HPD1-3 for port1-3; HPD_SRC to DP-source
20	HPD2	I	
19	HPD3	I	
5	HPD_SRC	O	
51	CAB_1	IO	CAB_1: CAB_DET to port1 CAD_2: CAB_DET to port2 CAB_SRC: CAB_DET to DP-source No CAB_DET for HDMI port3
54	CAB_2		
6	CAB_SRC		
1	OEB	I	OEB=0, device active; OEB=1, device shut down
15	SDA_CTL/PRI_SE	I	MS=0, PRI_SEL selects priority in pin control mode; MS=1, SDA_CTL as SDA in I2C control mode
16	SCL_CTL/EQ	IO	MS=0, EQ selects equalization in pin control mode; MS=1, SCL_CTL as SCL in I2C control mode
17	I2C_A1/PRE_EMP	I	MS=0, PRE_EMP selects Pre-emphasis in pin control mode; MS=1, I2C_A1 as I2C address A1 in I2C control mode
18	I2C_A2/ROUT_SEL	I	MS=0, ROUT_SEL selects source termination in pin control mode; MS=1, I2C_A2 as I2C address A2 in I2C control mode
31	MS	I	Mode Select: MS pin with weak pull low resistor > 500Kohm MS=0 or half VDD input level for pin control mode, MS=1 for I2C control mode
33	CEXT	O	Internal LDO bypass capacitance, 4.7uf to GND
4, 23, 28, 50	VDD	Power	3.3V VDD
Center Pad	GND	Ground	Bottom GND EPAD

### Pin mapping for dual mode DP source DEMUX to DP output

DP mode	HDMI/DVI mode	WVR31313A input pins	WVR31313A port1 output	WVR31313A port2 output	WVR31313A port3 output
ML_lane0(P)	TX2+	D0P	D0P1	D0P2	D2P3
ML_lane0(N)	TX2-	D0N	D0N1	D0N2	D2N3
ML_lane1(P)	TX1+	D1P	D1P1	D1P2	D1P3
ML_lane1(N)	TX1-	D1N	D1N1	D1N2	D1N3
ML_lane2(P)	TX0+	D2P	D2P1	D2P2	D0P3
ML_lane2(N)	TX0-	D2N	D2N1	D2N2	D0N3
ML_lane3(P)	TXC+	D3P	D3P1	D3P2	CLKP3
ML_lane3(N)	TXC-	D3N	D3N1	D3N2	CLKN3

### Function Description

The MS pin selects I2C or pin control mode.

Pin control mode has only automatic port selection. I2C control mode has automatic port selection.

In auto port selection, when only one HPD high detected, the port with HPD high will be selected. When multiple HPD high detected, the PRI\_SEL pin(priority select) will determine the priority of the 3 ports.

When PRI\_SEL=low, the port-priority will be port1-port2-port3 from high to low; when PRI\_SEL=high, the port priority will be port1-port3-port2 from high to low; when PRI\_SEL=M (open as not connected), the port priority will be port3-port1-port2 from high to low.

When port 1 (or port2) is selected and CAB\_1 (or CAB\_2) is low as in DP mode, the AUX/DDC channels will work as AUX channels. AUXP shall have 100Kohm external resistor to GND and AUXN shall have 100Kohm external resistor to VDD. The data rate of AUX channels will be >720Mbps.The internal DDC switch will be off.

When port 1 (or port2) is selected and CAB\_1 (or CAB\_2) is high when DP to HDMI adapter plugged, the AUX/DDC channels will work as DDC channels. The internal DDC channels are on and the AUX channels are off. The input of DDC channels can tolerate 5V input and voltage of DDC to source will be limited about 3.3V or below.

When port 1 or port 2 is selected (passive ports), port3 with HDMI re-driver will shut down.

When port 3 is selected, the internal DP to HDMI level shifter will be enabled. There will be 3 EQ and 3 Pre-emphasis settings in pin control mode, 8 EQ and 5 Pre-emphasis settings in I2C control mode.

When port 3 is selected, HDMI output can be standard TMDS-open-drain source, as well to be selected with internal source termination as 50 ohm pull up to 3.3V VDD, using ROUT\_SEL pin control or I2C control.

When port 3 is active as DP to HDMP level shifter, the DDC channel can be selected between bi-direction DDC buffer and passive DDC switch.

HPD1, HPD2 and HPD3 are with internal CMOS buffers and can support 3.3V and 5V HPD inputs.

### Squelch Mode

Squelch function will disable HDMI data output (as high impedance)when the voltage and frequency of input clock (TMDS) are below squelch threshold, which will prevent random noise presenting in HDMI data output, thereby prevent noise on sink display. Squelch function will enable-resume HDMI data output when input clock signals are above squelch threshold.

### Truth Table for TMD5 port3

EQ – three level pin control

PRE-EMP – three level pin control

EQ	Equalization value
0	1.5dB
open	4.0dB
1	6.5dB

PRE_EMP	TX pre-emphasis
0	0dB
open	1.5dB
1	2.5dB

ROUT\_SEL

ROUT_SEL	Pull-Up Resistors on port3 D[0:3]P3, D[0:3]N3
0	No Pull-up resistors
1	50Ω Pull-up resistors to VDD

MS – three level pin control

MS	Pin mode/type cable ID
0	Pin mode for Type 2 ID
M(0.5*vdd)	Pin mode for Type 1 ID
1	I2C mode

### Priority Selection Table

PRI_SEL (Priority order)	HPD1	HPD2	HPD3	HPD_SRC	CAB_SRC	AUXP/AUXN	SDA/SCL
0	0	0	0	0	Hi-Z	Hi-Z	Hi-Z
0	1	x	x	HPD1	CAB1=0	AUX1P/AUX1N	Hi-Z
					CAB1=1	Hi-Z	SDA1/SCL1
0	0	1	x	HPD2	CAB2=0	AUX2P/AUX2N	Hi-Z
					CAB2=1	Hi-Z	SDA2/SCL2
0	0	0	1	HPD3	High	Hi-Z	SDA3/SCL3
M	0	0	0	0	Hi-Z	Hi-Z	Hi-Z
M	1	x	0	HPD1	CAB1=0	AUX1P/AUX1N	Hi-Z
					CAB1=1	Hi-Z	SDA1/SCL1
M	0	1	0	HPD2	CAB2=0	AUX2P/AUX2N	Hi-Z
					CAB2=1	Hi-Z	SDA2/SCL2
M	x	x	1	HPD3	High	Hi-Z	SDA3/SCL3
1	0	0	0	0	Hi-Z	Hi-Z	Hi-Z
1	1	x	x	HPD1	CAB1=0	AUX1P/AUX1N	Hi-Z
					CAB1=1	Hi-Z	SDA1/SCL1
1	0	1	0	HPD2	CAB2=0	AUX2P/AUX2N	Hi-Z
					CAB2=1	Hi-Z	SDA2/SCL2
1	0	x	1	HPD3	High	Hi-Z	SDA3/SCL3

Note: M=internal half VDD when input=HiZ

**PI3WVR31313A**

PRI_SEL (Priority order)	HPD1	HPD2	HPD3	D0P	D1P	D2P	D3P	D0N	D1N	D2N	D3N
0	0	0	0	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
0	1	x	x	D0P1	D1P1	D2P1	D3P1	D0N1	D1N1	D2N1	D3N1
0	0	1	x	D0P2	D1P2	D2P2	D3P2	D0N2	D1N2	D2N2	D3N2
0	0	0	1	D2P3	D1P3	D0P3	CLKP3	D2N3	D1N3	D0N3	CLKN3
M	0	0	0	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
M	1	x	0	D0P1	D1P1	D2P1	D3P1	D0N1	D1N1	D2N1	D3N1
M	0	1	0	D0P2	D1P2	D2P2	D3P2	D0N2	D1N2	D2N2	D3N2
M	x	x	1	D2P3	D1P3	D0P3	CLKP3	D2N3	D1N3	D0N3	CLKN3
1	0	0	0	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
1	1	x	x	D0P1	D1P1	D2P1	D3P1	D0N1	D1N1	D2N1	D3N1
1	0	1	0	D0P2	D1P2	D2P2	D3P2	D0N2	D1N2	D2N2	D3N2
1	0	x	1	D2P3	D1P3	D0P3	CLKP3	D2N3	D1N3	D0N3	CLKN3

Note: M=internal half VDD when input=HiZ



## Maximum Ratings

(Above which useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Junction Temperature .....	125°C
Supply Voltage to Ground Potential .....	-0.5V to +4.6V
High Speed Channel Input Voltage (DP Mode).....	-0.5V to 2V
DDC and HPD channels Input Voltage .....	-0.5V to 6V
DC Output Current .....	180mA
Power Dissipation .....	0.6W

**Note:** Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## Electrical Characteristics

### Recommended Operation Conditions

V<sub>DD</sub> = 3.3V ±10%, Min and Max apply for T<sub>A</sub> between -40°C to 85°C Typical values are referenced to T<sub>A</sub> = 25°C

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
V <sub>DD</sub>	Operating Voltage		3.0	3.3	3.6	V
I <sub>DD</sub>	VDD supply current (Port1 or 2 active)	VDD=3.3V		1	1.8	mA
	VDD Supply Current (Port3 active)	Output Enable ( open drain 500mv signal-end 0dB pre-emphasis, not including 40mA current to source)		80	100	mA
		Output Enable ( double termination, 500mv signal-end 0dB pre-emphasis, not including 40mA current to source)		160	200	mA
I <sub>DDQ</sub>	VDD Quiescent Supply Current (port3 active w/o TMDS input)	TMDS Output Disable		3.5	5	mA
I <sub>sd1</sub>	Supply shut down current when OEB disable (MS=0)	V <sub>DD</sub> =3.6V, OEB=high		0.1	0.2	mA
I <sub>sd2</sub>	Supply shut down current when OEB disable (MS=1)	V <sub>DD</sub> =3.6V, OEB=high		0.6	1.2	mA

**DC Electrical Characteristics for Switching over Operating Range**

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
<b>OEB, MS, ROUT_SEL</b>						
$I_{IH}$	High level digital input current	$V_{IH} = V_{DD}$	-10		40	$\mu A$
$I_{IL}$	Low level digital input current	$V_{IL} = GND$	-10		10	$\mu A$
$V_{IH}$	High level digital input voltage		2.0			V
$V_{IL}$	Low level digital input voltage		0		0.8	V
<b>HPD_SRC</b>						
$V_{OL\_HPD\_SRC}$	Buffer Output Low Voltage	$I_{OL} = 4\text{ mA}$			0.4	V
$V_{OH\_HPD\_SRC}$	Buffer Output Low Voltage	$I_{OH} = 4\text{ mA}$	2.4			V
<b>HPD_sink</b>						
$I_{IH}$	High level digital input current	$V_{IH} = V_{DD}$	-10		40	$\mu A$
$I_{IL}$	Low level digital input current	$V_{IL} = GND$	-10		10	$\mu A$
$V_{IH}$	High level digital input voltage	$V_{DD} = 3.3V$	2.0			V
$V_{IL}$	Low level digital input voltage		0		0.8	V
<b>CAB</b>						
$I_{LK}$	Input leakage current	Switch is off, $V_{in} = 5.5V$	-50		50	$\mu A$
$C_{IO}$	Input/Output capacitance when-passive switch on			10		pF
$R_{ON}$	Passive Switch resistance	$I_O = 3\text{ mA}$ , $V_O = 0.4V$		25	50	$\Omega$
$V_{pass}$	Switch Output voltage	$V_I = 3.3V$ , $I_I = 100\mu A$	1.5	3.0	3.3	V
CI(source)	Source side CAB capacitance	$V_I$ peak-peak = 1V, 100 KHz		3.5		pF
CI(sink)	Sink side CAB capacitance when			6.5		pF
<b>SDA/SCL, SDA1/SCL1, SDA2/SCL2</b>						
$I_{LK}$	Input leakage current	DDC switch is off, $V_{in} = 5.5V$	-50		50	$\mu A$
$C_{IO}$	Input/Output capacitance when passive switch on	$V_I$ peak-peak = 1V, 100 KHz		8		pF
$R_{ON}$	Passive Switch resistance	$I_O = 3\text{ mA}$ , $V_O = 0.4V$		25	50	$\Omega$
$V_{pass}$	Switch Output voltage	$V_I = 5.0V$ , $I_I = 100\mu A$ $V_{DD} = 3.3V$	1.5	2.0	2.5	V
CI(source)	Source side DDC capacitance ( passive switch off. )	$V_I$ peak-peak = 1V, 100 KHz		2.5		pF
CI(sink)	Sink side DDC capacitance ( pas-sive switch off. )	$V_I$ peak-peak = 1V, 100 KHz		5		pF
<b>SDA3/SCL3 ( DDC buffer of port3 active)</b>						
$V_{IH}$	High level input voltage	$V_{DD} = 3.3V$	2.0			V
$V_{IL}$	Low level input voltage		0		0.8	V
$I_{LK}$	Input leakage current	DDC switch is off, $V_{in} = 5.5V$	-10		10	$\mu A$

**PI3WVR31313A**

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
I <sub>IL</sub>	Low level input current	V <sub>IL</sub> = 0.2V	-10		10	μA
V <sub>OL</sub>	Low level output voltage	I <sub>OL</sub> = 4mA			0.2	V
I <sub>ILOH</sub>	HIGH-level output leakage current	V <sub>O</sub> =3.6V			10	μA
C <sub>IO</sub>	Input/output capacitance	V <sub>I</sub> = 3 V or 0 V; V <sub>CC</sub> = 3.3 V or 0V		4		pF
<b>SDA/SCL (DDC buffer of port3 active)</b>						
V <sub>IH</sub>	High level input voltage	V <sub>DD</sub> =3.3V	2.0			V
V <sub>IL</sub>	Low level input voltage		0		0.4	V
I <sub>LK</sub>	Input leakage current	DDC switch is off, V <sub>in</sub> = 5.5V	-10		10	uA
I <sub>IL</sub>	Low level input current	V <sub>IL</sub> = 0.2V	-10		10	μA
V <sub>OL</sub>	Low level output voltage	I <sub>OL</sub> = 4mA	0.47	0.52	0.6	V
I <sub>ILOH</sub>	HIGH-level output leakage current	V <sub>O</sub> =3.6V	5		10	μA
C <sub>IO</sub>	Input/output capacitance	V <sub>I</sub> = 3 V or 0 V; V <sub>CC</sub> = 3.3 V or 0V		8		pF
<b>AUXP, AUXN, AUXnP/SCLn, AUXnN/SDAn</b>						
I <sub>LK</sub>	Input leakage current	DDC switch is off, V <sub>in</sub> =5.5V	-50		50	uA
C <sub>IO</sub>	Input/Output capacitance when passive switch on	V <sub>I</sub> peak-peak = 1V, 100 KHz		6		pF
R <sub>ON</sub>	Passive Switch resistance	I <sub>O</sub> = 3mA, V <sub>O</sub> = 0.3V		5		Ω
		I <sub>O</sub> = 3mA, V <sub>O</sub> = 3.0V		10		Ω
V <sub>pass</sub>	Switch Output voltage	V <sub>I</sub> =5.5V, I <sub>I</sub> =100uA V <sub>DD</sub> =3.3V		4	4.5	V
CI(source)	Source side capacitance ( passive switch off. )	V <sub>I</sub> peak-peak = 1V, 100 KHz		2.5		pF
CI(sink)	Sink side capacitance ( passive switch off. )	V <sub>I</sub> peak-peak = 1V, 100 KHz		3.5		pF
<b>High Speed Channel (D[0:3]P/N – D[0:3]P1N1, D[0:3]P/N – D[0:3]P2N2)</b>						
V <sub>IK</sub>	Clamp Diode Voltage (HS Channel)	V <sub>DD</sub> = Max., I <sub>IN</sub> = -18mA		-1.6	-1.8	V
I <sub>IH</sub>	Input HIGH Current	V <sub>DD</sub> = Max., V <sub>IN</sub> = V <sub>DD</sub>			±10	μA
I <sub>IL</sub>	Input LOW Current	V <sub>DD</sub> = Max., V <sub>IN</sub> = GND			±10	
R <sub>ON_HS</sub>	On resistance between input to out- put for high speed signals	V <sub>INPUT,cm</sub> = 0V to 1.2V, V <sub>INPUT,diff</sub> < 1.0Vp-p, diff, V <sub>DD</sub> = 3.0V, I <sub>INPUT</sub> = 20mA		8		Ohm

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
<b>High Speed Channel Port3 (D[0:2]P3/N3, CLKP3/N3)</b>						
V <sub>I(open)</sub>	Single-ended input voltage under high impedance input or open input	I <sub>L</sub> =10uA	V <sub>DD</sub> -10		V <sub>DD</sub> +10	mV
R <sub>T</sub>	Input termination resistance	V <sub>IN</sub> =2.9V	45	50	66	ohm
I <sub>OZ</sub>	Leakage current resistance	V <sub>DD</sub> =3.6V, OEB=High		30	100	uA
I <sub>off</sub>	Power off leakage current	V <sub>DD</sub> =0, V <sub>IN</sub> =3.6V	-100		100	uA

### Dynamic Electrical Characteristics over Operating Range

(T<sub>A</sub> = -40° to +85°C, V<sub>DD</sub> = 3.3V ±10%)


Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
<b>TMDS Differential Pins</b>						
t <sub>pd</sub>	Propagation delay	V <sub>DD</sub> = 3.3V, Rout = 50Ω off, open drain, 0dB pre-emphasis			2000	ps
t <sub>r</sub>	Differential output signal rise time (20% - 80%)			120		
t <sub>f</sub>	Differential output signal fall time (20% - 80%)			120		
t <sub>sk(p)</sub>	Pulse skew			15	50	
t <sub>sk(D)</sub>	Intra-pair differential skew			25	50	
t <sub>sk(o)</sub>	Inter-pair differential skew(2)				100	
T <sub>jit_clk(pp)</sub>	Peak-to-peak output jitter CLK residual jitter	Data Input = 3.4 Gbps HDMI data pattern from signal generation, short trace.		15	40	us
T <sub>jit_dat(pp)</sub>	Peak-to-peak output jitter DATA Residual Jitter	CLK Input = 340 MHz clock		25	50	
t <sub>en</sub>	Enable time	when channel is active			10	us
t <sub>dis</sub>	Disable time				50	
<b>SCL, SDA channel, AUX channel , CAB channel : passive switches</b>						
t <sub>pd(DDC)</sub>	Propagation delay from SCLn/SDAn to SCL/SDA or SCL/SDA to SCLn/SDAn In passive SW on.	C <sub>L</sub> = 10pF, in passive switch			5	ns
<b>SCL3, SDA3- SCL,SDA channel : buffers</b>						
t <sub>PLH</sub>	LOW-to-HIGH propagation delay	SCL/SDA to SCL3/SDA3	50	100	150	ns
t <sub>PHL</sub>	HIGH-to-LOW propagation delay	SCL/SDA to SCL3/SDA3	10	20	40	ns
t <sub>PLH</sub>	LOW-to-HIGH propagation delay	SCL3/SDA3 to SCL/SDA	50	100	150	ns
t <sub>PHL</sub>	HIGH-to-LOW propagation delay	SCL3/SDA3 to SCL/SDA	10	20	40	ns

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit
<b>Control and Status Pins (HPDn, HPD_SRC)</b>						
tpd(HPD)	Propagation delay (from HPDx to the active port of HPD_SRC, high to low)	CL = 10pF		2	4	us
tsx(HPD)	Switch time (from port select to the latest HPD , manual selection mode)			2	4	us


### Dynamic Electrical Characteristics

Parameter	Description	Test Conditions	Min.	Typ.	Max.	Unit	
<b>High Speed Channel (D[0:3]P/N – D[0:3]P1N1, D[0:3]P/N - D[0:3]P2N2)</b>							
X <sub>TALK</sub>	Crosstalk on High Speed Channels	See Fig. 1 for Measurement Setup	f= 2.7 GHz		-32	-30	dB
O <sub>IRR</sub>	OFF Isolation on High Speed Channels	See Fig. 2 for Measurement Setup	f= 2.7 GHz		-19	-17	dB
I <sub>LOSS</sub>	Differential Insertion Loss on High Speed Channels	@2.7GHZ (see figure 3)	-1.7	-1.5		dB	
R <sub>loss</sub>	Differential Return Loss on High Speed Channels	@ 2.7GHz (5.4Gbps)		-18	-16	dB	
BW <sub>Dx±</sub>	Bandwidth -3dB for Main high speed path (Dx±)	See figure 3	5.1	5.6		GHz	
BW <sub>AUX</sub>	Bandwidth -3dB for AUX	See figure 3	1.2	1.5		GHz	
T <sub>startup</sub>	V <sub>DD</sub> valid to channel enable			250		us	
T <sub>wakeup</sub>	Enabling output by changing OEB from High to Low			250		us	
T <sub>pd</sub>	Propagation delay (input pin to output pin) on all channels			80		ps	
t <sub>b-b</sub>	Bit-to-bit skew within the same differential pair of Dx± channels			5	7	ps	
t <sub>ch-ch</sub>	Channel-to-channel skew of Dx± channels				35	ps	


**PI3WVR31313A**

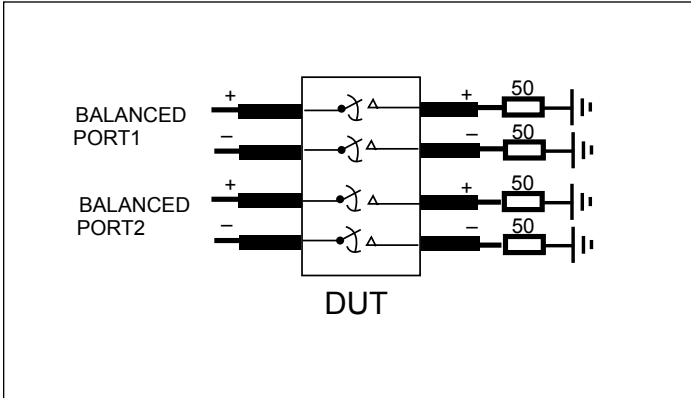

**Fig 1. Crosstalk Setup**

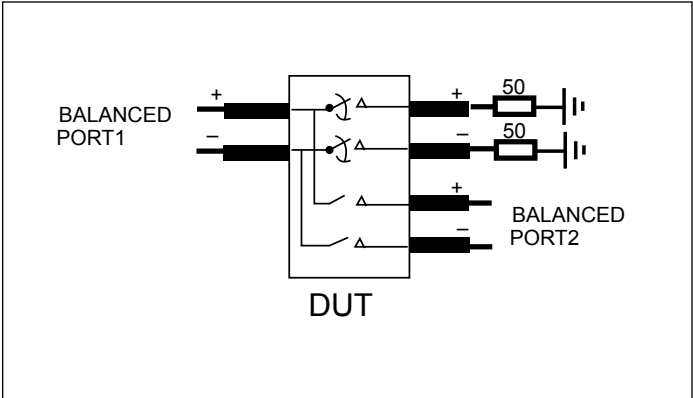

**Fig 2. Off-isolation setup**

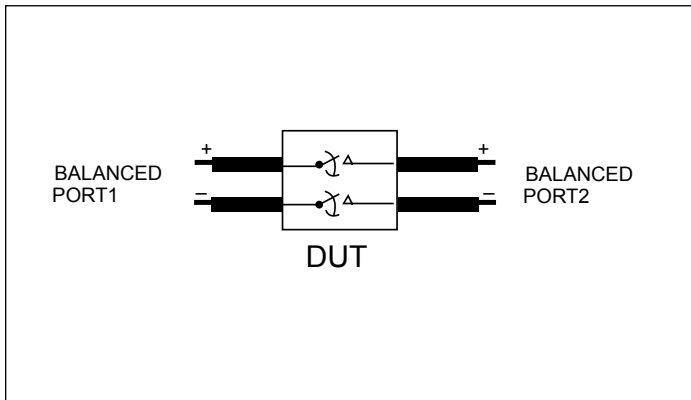

**Fig 3. Differential Insertion Loss**



**Differential Insertion Loss , Vdd=3.3V , 25C**



**D0 to D01 Channel**



**D0 to D02 Channel**

**Differential Return Loss , Vdd=3.3V, 25C**



**D0 to D01 Channel**




**D0 to D02 Channel**

**PI3WVR31313A**


**Differential Off Isolation , Vdd=3.3V, 25C**




**HPD auto selection timing waveform**

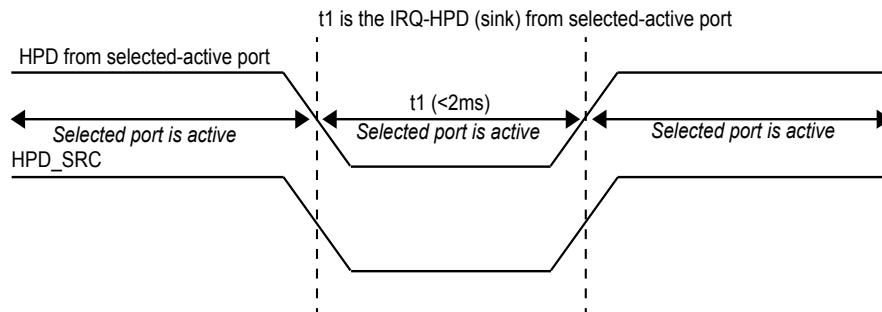


**Fig 4. HPD timing t1. HPD\_SRC low and the active of selected port will follow t1, if t1 further extended less than t2 (2s) when auto switch and manual switch**

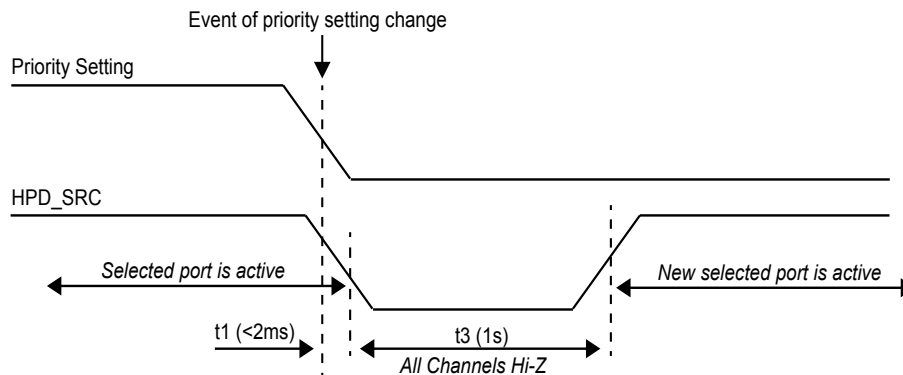


**Fig 5. HPD timing t3. All channels include DP-HDMI data, AUX, DDC, HPD and CAB\_DET when auto switch**

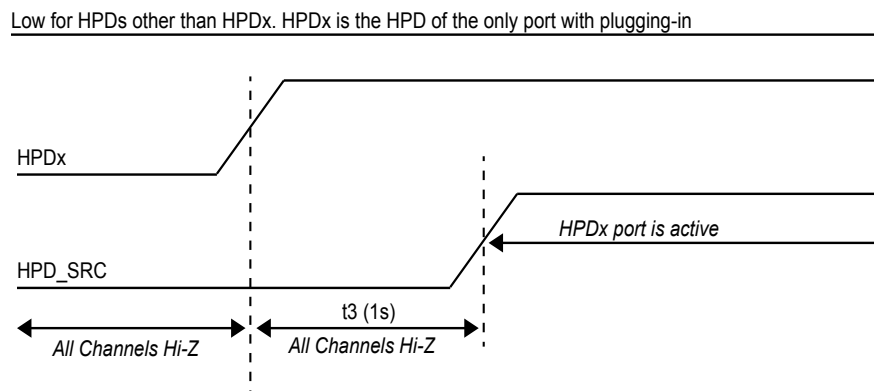


**Fig 6. HPD timing t3 when auto switch**

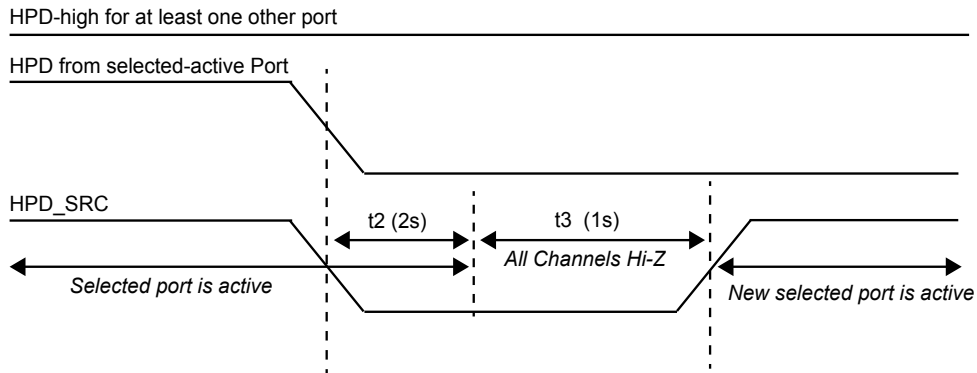


**Fig 7. HPD timing with auto switch**

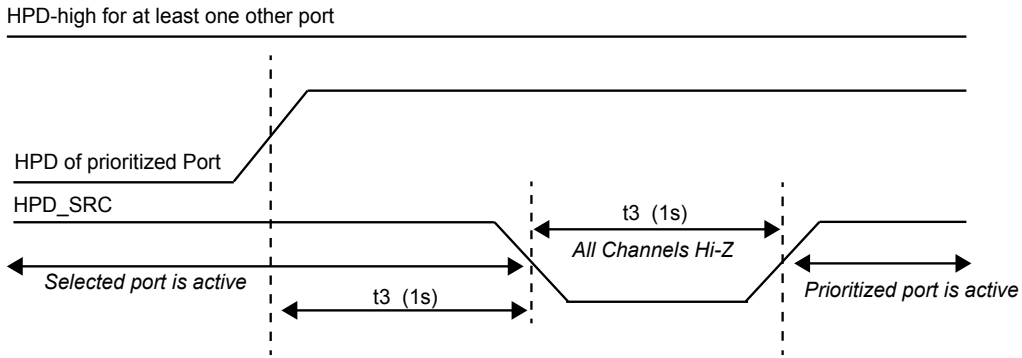

**Fig 8. HPD timing with auto switch**

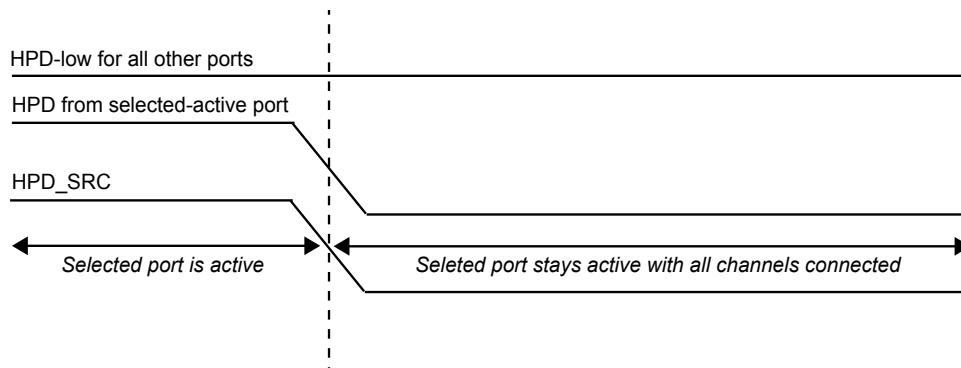

**Fig 9. HPD timing when auto switch and manual switch**

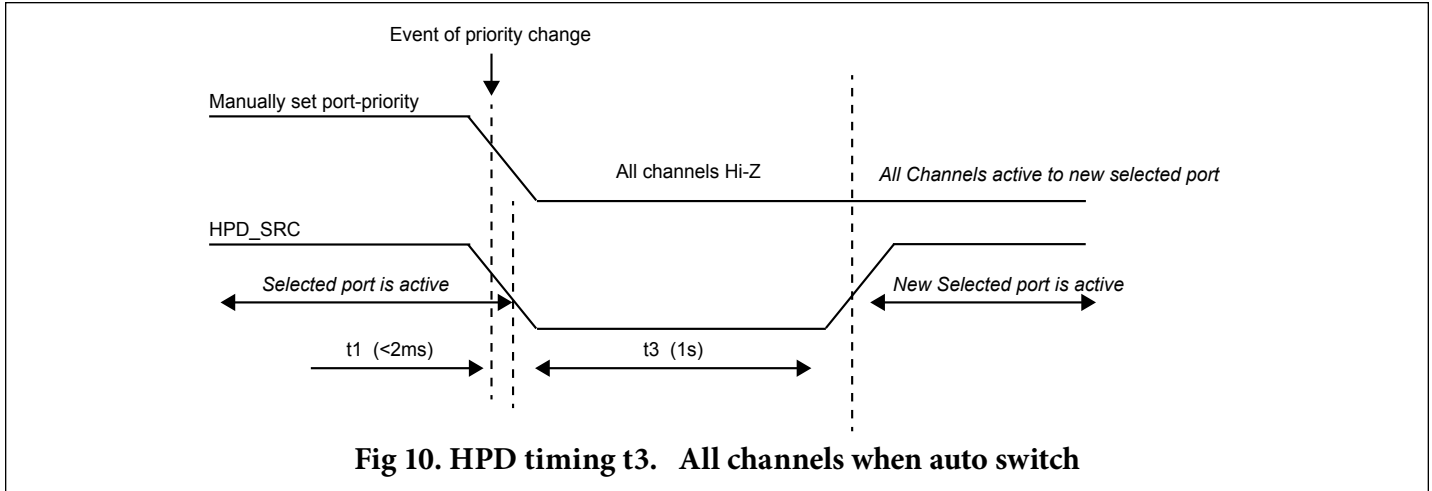

Parameter	Test Conditions	Min.	Typ.*	Max.	Unit
<b>HPD auto switching timing</b>					
HPD pulse duration when treated as an IRQ -t1 (Figure 4)				2	ms
Propagation delay of HPDx Desertion -t2 (Figure 7)		1.0	2	3	s
HPD_SRC low duration when the outputs are switched -t3(Figure 5,6,7,8,10); Propagation delay of HPDx assertion (Figure 8)		0.5	1	1.5	s

\*Typical time can be changed by I2C Byte 0x01 bit[2:0], and Byte 0x04 bit3.

**I2C Address Byte**

	b7(MSB)	b6	b5	b4	b3	b2	b1	b0 (R/W)
Address Byte	1	0	1	1	A2	A1	1	1/0*

\* Read; 0:Write, A2 and A1 are two address bits setting

**Data transmission format**


Data is transmitted to the PI3WVR31313A registers using the Write mode as shown in Figure 1. Data is read from the PI3WVR31313A registers using the Read mode as shown in Figure 2.

**Figure 1: I2C control register write condition**



From master to slave      A= acknowledge      Ā= not acknowledge  
 From slave to master      S= start condition      P= stop condition

**Figure 2: I2c control register read condition**





## I2C Control Register

The I2C control register uses index read or write for byte access.

Offset	Name	Description	Power Up Condition	Type
0x00	CONFIG[7:0]	<p>[7] Reserved to 0</p> <p>[6:5] Port SEL1/SEL0 selection control            00 port 1 (Reserved)            01 port 2 (Reserved)            10 port 3 (Reserved)            11 Auto selection mode depending on PRI_SEL below</p> <p>[4:2] PRI_SEL priority selection control by HPDx            000 port1/port2/port3            001 port1/port3/port2            010 port2/port1/port3            011 port2/port3/port1            1x0 port3/port1/port2            1x1 port3/port2/port1</p> <p>[1] DP_HDMI selection control            0=DP input,            1=Reserved</p> <p>[0] Cable ID type selection            0=Type 2 cable ID            1=Type 1 cable ID</p>	0x01	R/W

0x01	RX_SET[7:5] for port3; HPD auto selection time	<p>[7:5] EQ programmable setting</p> <p>000: 1.5 dB 001: 4 dB 010: 6.5 dB 011: 9 dB 100: 11.5 dB 101: 14 dB 110: 16.5 dB 111: 9 dB</p> <p>[4:3] HPD auto selection time source control</p> <p>00: normal 01: -25% 10: +25% 11: test mode</p> <p>[2] HPD auto selection time t3 setting</p> <p>0: 256ms 1: 128ms</p> <p>[1] HPD auto selection time t4 setting</p> <p>0: 1024ms 1: 516ms</p> <p>[0] HPD pulse duration treated as IRQ time t1 setting</p> <p>0: 2ms 1: 4ms</p>	0x00	R/W
------	---	---	------	-----

0x02	TX_SET[7:0] for port3	<p>Output setting for HDMI re-driver/level shifter</p> <p>[7] HDMI output control 0: open drain 1: double termination</p> <p>[6:4] HDMI output Pre-emphasis settings 000: 0dB 001: 1.5dB 010: 2.5dB 011: 3.5dB 100: 6dB</p> <p>[3:2] TMDS output swing setting 00: 500mv as default 01: -10% 10: +10% 11: +20%</p> <p>[1] TMDS output slow rate setting 0: as default 1: +10%</p> <p>[0] DP1 and DP2 port 10Kohm pull low control 0=10Kohm pull low on 1=10Kohm pull low off</p>	0x00	R/W
0x03	Pericom ID	<p>Pericom Vendor Register ID (refer to PCIE clock buffer)</p> <p>[7:4] Vendor ID 0101 [3:0] device revision 0001</p>	0x51	R

**PI3WVR31313A**

0x04	HPD <sub>x</sub> / CAB <sub>x</sub> [6:0] Read only	<p>[7] HPD_SRC output logic function (buffer) 0: HPD_SRC=HPD<sub>x</sub> 1: HPD_SRC=/HPD<sub>x</sub></p> <p>[6] DDC function for port 3 0: Active buffer 1: passive switch</p> <p>[5] Port switching in manual selection 1: disable T3 time pulse when port switching, Port switch immediately 0: Enable T3 time pulse when port switching</p> <p>[4] HPD auto selection time t2 setting 0: 128ms 1: 64ms</p> <p>[3] HPD3 status as read only [2] HPD2 status as read only [1] HPD1 status as read only [0] Reserved for HPD1B</p>	0x00	R/W [7:4] R [3:0]
------	---	--	------	----------------------

## Table of ID registers

Data address offset	Data as in spec	Read/White as in spec	Description as in spec	WVR31313A
00h	44h	RO	D	D
01h	50h	RO	P	P
02h	2dh	RO	-	-
03h	48h	RO	H	H
04h	44h	RO	D	D
05h	4dh	RO	M	M
06h	49h	RO	I	I
07h	20h	RO	Space	Space
08h	41h	RO	A	A
09h	44h	RO	D	D
0ah	41h	RO	A	A
0bh	50h	RO	P	P
0ch	54h	RO	T	T
0dh	4fh	RO	O	O
0eh	52h	RO	R	R
0fh	04h	RO	.	.
10h	A0h	RO	Cable Adaptor Identifier	A0h
11h	UD	RO	IEEE OUI 1st byte	00h
12h	UD	RO	IEEE OUI 2nd byte	60h
13h	UD	RO	IEEE OUI third byte	23h
14h	UD	RO	Device Id	50h "P"
15h	UD	RO	Device Id	49h "I"
16h	UD	RO	Device Id	33h "3"
17h	UD	RO	Device Id	57h "W"
18h	UD	RO	Device Id	56h "V"
19h	UD	RO	Device Id	52h "R"
1ah	UD	RO	Hardware (chip) revision 7:4h: major revision 3:0h: minor revision.	00h
1bh	UD	RO	Firmware/software major revision	00h
1ch	UD	RO	Firmware/software minor revision	00h
1dh	UD	RO	Clock rate, specified max 300mhz for HDMI	78h: 300MHz (300/2.5=120=78h)
1eh	0fh	RO	I2C speed control capabilities bit map	0fh

**PI3WVR31313A**

1fh	00h	RW	Reserved data Address at 1fh: 1. DP source reads data address 1fh, ID register returns 00h 2. DP source writes data AAh to data address 1fh, ID register responds ACK or returns 00h.	1fh=00, RW, reserved
20h	00h or 01h	R/W	TMDS output enable or disable. 00h: enabled 01h: disabled (<=10mV Voff) [7:1] Reserved	00h, RW (Not Applicable for PI-3WVR31313A) 00h: enabled 01h: disabled (<=10mV Voff) [7:1] Reserved
21h	00h or 01h	R/W	Enables/disables the CEC Isolation Switch.  00h: enabled 01h: disabled [7:1] Reserved	00h, RW (Not Applicable for PI-3WVR31313A) 00h: enabled 01h: disabled [7:1] Reserved
22h	UD	R/W	I2C speed control status bit map.  01h: 1Kbps 02h: 5Kbps 04h: 10Kbps 08h: 100Kbps 10h, 20h, 40h and 80h are reserved	08h for 100Khz. (Not Applicable for PI-3WVR31313A) For the function specified as: 01h: 1Kbps 02h: 5Kbps 04h: 10Kbps 08h: 100Kbps 10h, 20h, 40h and 80h are reserved
23h-ffh	00h	R/W	Reserved data Address from 23h to ffh: 1. DP source reads data address 23h thru ffh, ID register returns 00h. 2. DP source writes data AAh to data address 23h thru ffh, ID register responds ACK or returns 00h.	23h-ffh=00h, RW, reserved.

**Notes:**

1. DP++ source accesses ID at device address 80h/81h with data offset from 00h-ffh.
2. UD: user dependent.
3. RO: read only.
4. OUI: IEEE Organizationally Unique Identifier.